

## 6G SDI 75 Ohm HD-BNC Male to 75 Ohm HD-BNC Male Cable 75 Ohm 1855A-BR Coax in 12 Inch

The 75 ohm HD-BNC male to 75 ohm HD-BNC male 12 inch cable using 75 ohm 1855A-BR coax, part number FMCA2733/BR-12, from Fairview Microwave is in-stock and ships same day. This Fairview HD-BNC to HD-BNC cable assembly has a male to male gender configuration with 75 ohm flexible Belden Belden 1855A-BR coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA2733/BR-12 HD-BNC male to HD-BNC male cable assembly operates to 6 GHz and enables 6Gb/s data transfer rates for high resolution uncompressed video signal transmission. These products offer 4K and Ultra-HD quality signals that meet SMPTE Standard 2081-1.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

| Description                   | Min | Typ          | Max   | Units                            |
|-------------------------------|-----|--------------|-------|----------------------------------|
| Frequency Range               | DC  |              | 6     | GHz                              |
| VSWR                          |     |              | 1.5:1 |                                  |
| Velocity of Propagation       |     | 82           |       | %                                |
| Group Delay                   |     | 1.22 [4]     |       | ns/ft [ns/m]                     |
| Capacitance                   |     | 16.3 [53.48] |       | pF/ft [pF/m]                     |
| Inductance                    |     | 0.107 [0.35] |       | uH/ft [uH/m]                     |
| DC Resistance Inner Conductor |     | 20.1 [65.94] |       | $\Omega$ /1000ft [ $\Omega$ /Km] |
| DC Resistance Outer Conductor |     | 3.7 [12.14]  |       | $\Omega$ /1000ft [ $\Omega$ /Km] |
| Operating Voltage (AC)        |     |              | 300   | Vrms                             |

### Performance by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 0.25 | 0.5  | 1    | 2.5  | 6    | GHz   |
| Insertion Loss (Typ.) | 0.26 | 0.28 | 0.31 | 0.38 | 0.49 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

### Mechanical Specifications

#### Cable Assembly

Length\* 12 in [304.8 mm]  
 Weight 0.1 lbs [45.36 g]

#### Cable

Cable Type Belden Belden 1855A-BR  
 Impedance 75 Ohms



### Configuration:

- HD-BNC Male
- HD-BNC Male
- Belden Belden 1855A-BR

### Features:

- Max Frequency 6 GHz
- 82% Phase Velocity
- PVC Jacket
- Meets SMPTE ST 2081-1
- 6Gb/s Transmission
- Cost Effective

### Applications:

- General Purpose
- Laboratory Use
- 6G-SDI, Video, and Broadband UHDTV
- Broadband Internet Delivery
- Broadcast A/V
- 4K/8K Video Equipment
- Medical Equipment Requiring High Speed Video
- HD Cameras

Fairview Microwave  
 301 Leora Ln., Suite 100  
 Lewisville, TX 75056  
 Tel: 1-800-715-4396 / (972) 649-6678  
 Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

|                                      |                    |
|--------------------------------------|--------------------|
| Inner Conductor Type                 | Solid              |
| Inner Conductor Material and Plating | Copper, Bare       |
| Dielectric Type                      | PE                 |
| Number of Shields                    | 1                  |
| Shield Layer 1                       | Aluminum Polyester |
| Shield Layer 2                       | Tinned Copper      |
| Jacket Material                      | PVC, Brown         |
| Jacket Diameter                      | 0.159 in [4.04 mm] |

## Connectors

| Description                   | Connector 1     | Connector 2     |
|-------------------------------|-----------------|-----------------|
| Type                          | HD-BNC Male     | HD-BNC Male     |
| Impedance                     | 75 Ohms         | 75 Ohms         |
| Contact Material & Plating    | Brass, Gold     | Brass, Gold     |
| Contact Plating Spec.         | 10 µin minimum  | 10 µin minimum  |
| Dielectric Type               | PTFE            | PTFE            |
| Outer Cond Material & Plating | Brass, Nickel   | Brass, Nickel   |
| Outer Cond Plating Spec.      | 100 µin minimum | 100 µin minimum |
| Body Material & Plating       | Brass, Nickel   | Brass, Nickel   |
| Body Plating Spec.            | 100 µin minimum | 100 µin minimum |

## Environmental Specifications

### Temperature

|                 |                  |
|-----------------|------------------|
| Operating Range | -30 to +75 deg C |
|-----------------|------------------|

## Compliance Certifications (see [product page](#) for current document)

## Plotted and Other Data

### Notes:

- Values at 25°C, sea level.

## How to Order

Part Number Configuration:

**FMCA2733/BR - xx uu**

cm = Centimeters  
 <blank> = Inches  
 Length

Example: FMCA2733/BR-12 = 12 inches long cable  
 FMCA2733/BR-100cm = 100 cm long cable

6G SDI 75 Ohm HD-BNC Male to 75 Ohm HD-BNC Male Cable 75 Ohm 1855A-BR Coax in 12 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: [6G SDI 75 Ohm HD-BNC Male to 75 Ohm HD-BNC Male Cable 75 Ohm 1855A-BR Coax in 12 Inch FMCA2733/BR-12](https://www.fairviewmicrowave.com/6g-sdi-75-ohm-hd-bnc-male-to-75-ohm-hd-bnc-male-cable-75-ohm-1855a-br-coax-in-12-inch-fmca2733-br-12-p.aspx)

URL: <https://www.fairviewmicrowave.com/6g-sdi-75-ohm-hd-bnc-male-to-75-ohm-hd-bnc-male-cable-75-ohm-1855a-br-coax-in-12-inch-fmca2733-br-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



| REVISIONS |                 |         |          |
|-----------|-----------------|---------|----------|
| REV.      | DESCRIPTION     | DATE    | APPROVED |
| A         | INITIAL RELEASE | 4/29/22 | AGANWANI |

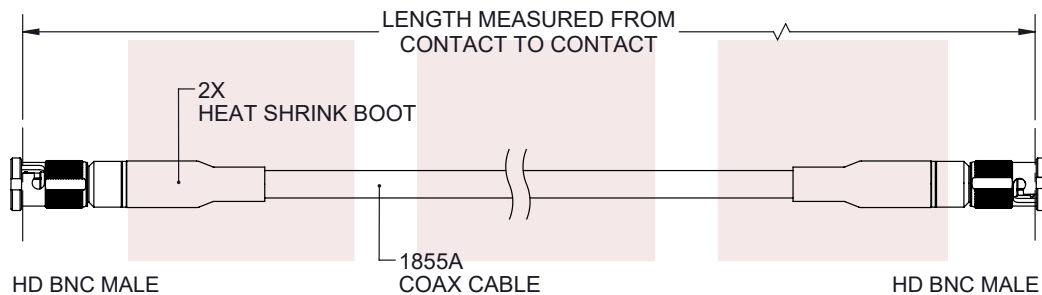

| FMCA2733/ZZ<br>(ZZ = CABLE COLOR DESIGNATION) | COAX CABLE COLOR |
|-----------------------------------------------|------------------|
| FMCA2733/BK                                   | BLACK            |
| FMCA2733/BL                                   | BLUE             |
| FMCA2733/BR                                   | BROWN            |
| FMCA2733/GR                                   | GREEN            |
| FMCA2733/GY                                   | GRAY             |
| FMCA2733/OR                                   | ORANGE           |
| FMCA2733/RD                                   | RED              |
| FMCA2733/VL                                   | VIOLET           |
| FMCA2733/WH                                   | WHITE            |
| FMCA2733/YW                                   | YELLOW           |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

TITLE

6G SDI 75 Ohm HD-BNC Male to 75 Ohm HD-BNC Male Cable 75 Ohm 1855A-BR Coax in 12 Inch

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS


TOLERANCES:

.X = ±.2 [5.08] FRACTIONS  
.XX = ±.02 [.51] ± 1/32  
XXX = ±.005 [.13] ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0  
12 [305] < L ≤ 60 [1524] = +2 [51] / -0  
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0  
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0  
300 [7620] < L = +5%L / -0

THIRD-ANGLE PROJECTION



THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

|           |                    |                    |                         |          |
|-----------|--------------------|--------------------|-------------------------|----------|
| SIZE<br>A | CAGE CODE<br>3FKR5 | DRAWN BY<br>HBAKKE | ITEM NO.<br>FMCA2733/ZZ | REV<br>A |
|-----------|--------------------|--------------------|-------------------------|----------|

T-Rev.D