

Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.




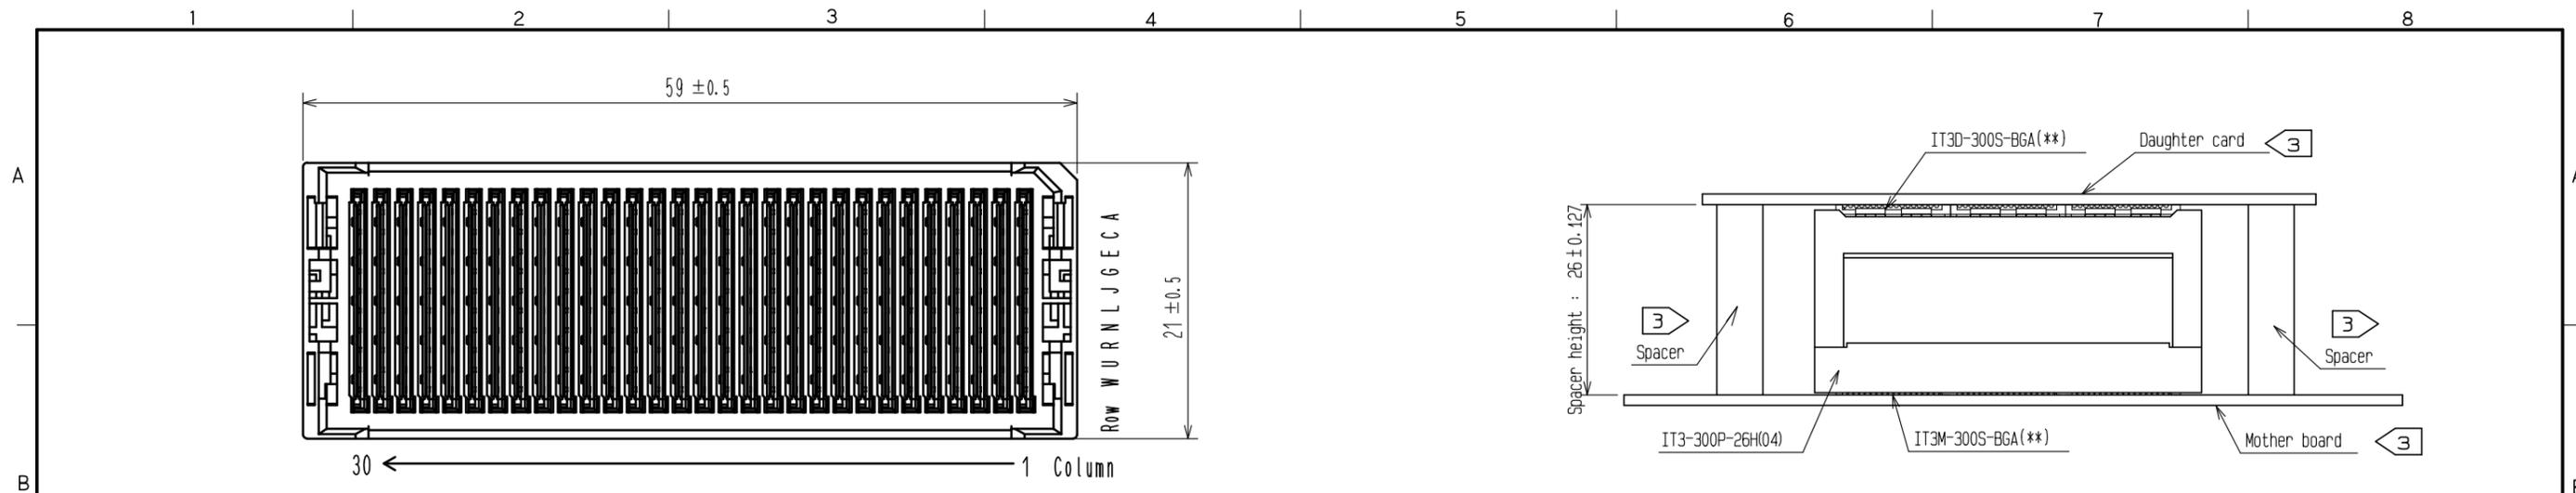


Fig. 1(FREE)

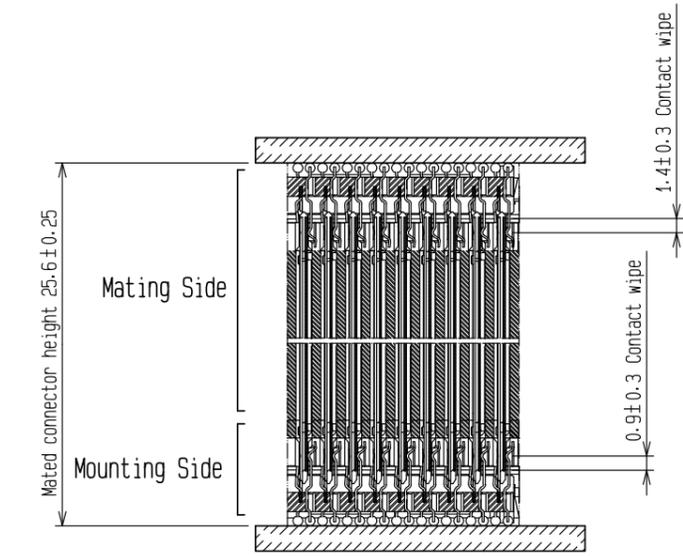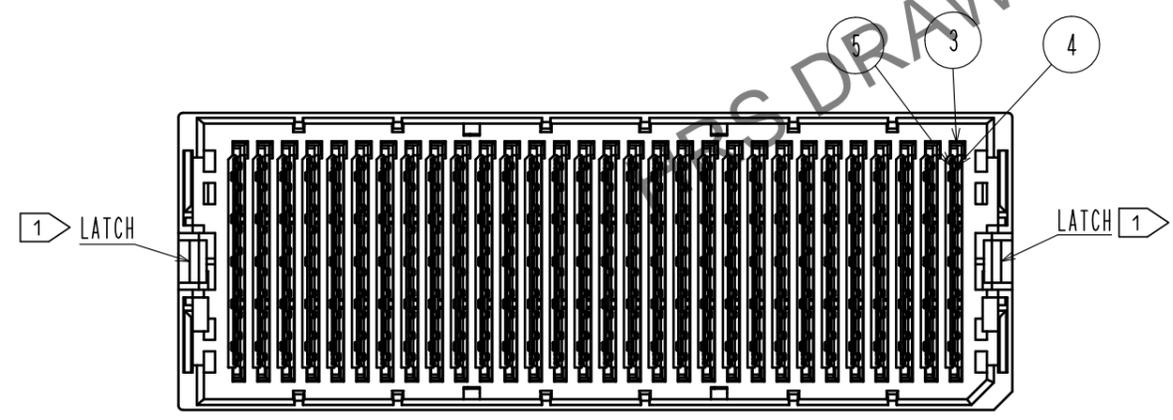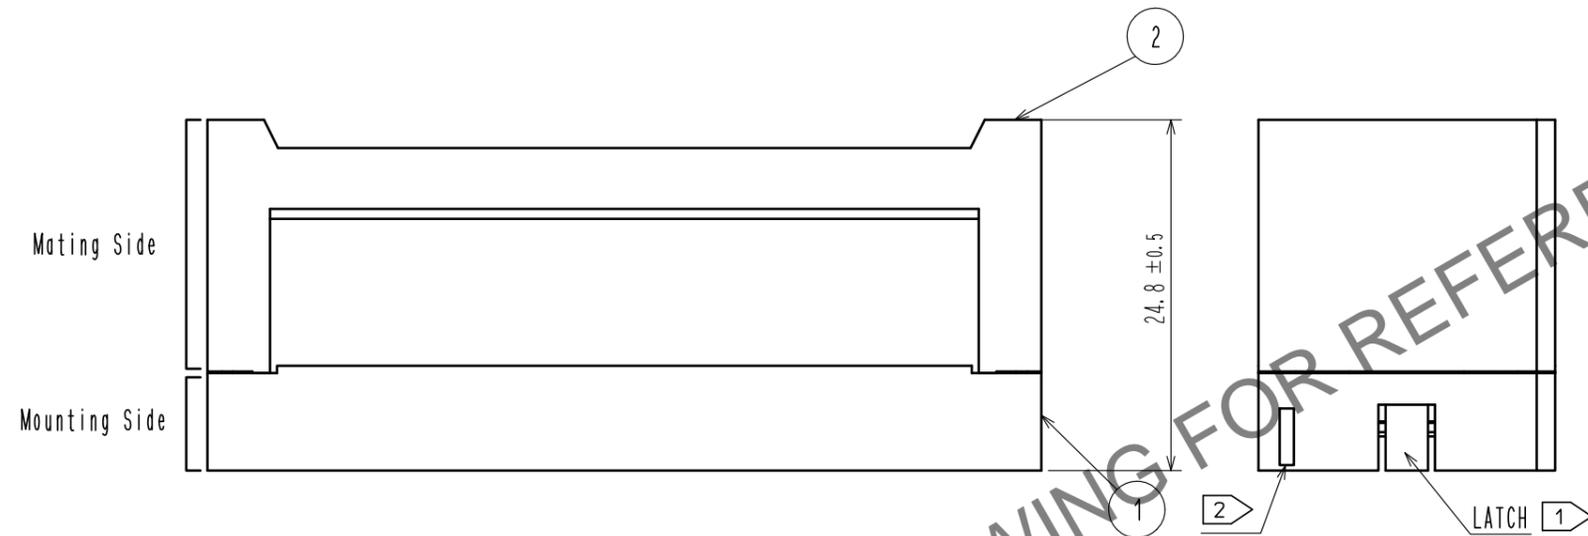

Mating Cross Section (Free)

- NOTE.
- 1 Mating side is mated with the receptacle:IT3M-300S-BGA(\*\*) and fixed with the latch.
  - 2 Lot No. shall be marked on the indicated position.
  - 3 The indicated mother board and daughter card shall be fastened to the additional reinforcements to prevent the stress on IT3\*-300S-BGA(\*\*) solder joints.
  - 4. Please refer to HIROSE document: ETAD-F0347 'IT3 design guideline'.
  - 5. This product consists of 300 signal lines and 270 ground lines.
  - 6. 30pcs of this products are packed in a soft tray.
  - 7. Standard package of 60pcs are packaged in a carton box.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	LCP	BLACK	UL94V-0	5	Copper Alloy		CONTACT AREA:NICKEL(1.5μm)+GOLD (0.76μm)
2	LCP	GRAY	UL94V-0	4	Copper Alloy		CONTACT AREA:NICKEL(1.5μm)+GOLD (0.76μm)
1	PBT	BLACK	UL94V-0				

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : MK. EZAKI			15.08.26	DRAWING NO. EDC-157091-04-00		
CHECKED : MK. EZAKI			15.08.26	PART NO. IT3-300P-26H(04)		
DESIGNED : TF. SUGAWARA			15.08.26	CODE NO. CL636-0135-9-04		
DRAWN : KT. AIZAWA			15.08.26			