


- **Front-End Filter for European Wireless Receivers**
- **Low-Loss, Coupled-resonator Quartz Design**
- **Simple External Impedance Matching**
- **Complies with Directive 2002/95/EC (RoHS)**
- **Tape and Reel Standard per ANSI/EIA-481**
- **Moisture Sensitivity Level: 1**
- **AEC-Q200 Qualified**

The RF3336E is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 868.35 MHz receivers. Receivers using this filter include superheterodynes with 10.7 MHz or 500 kHz IFs, direct conversion receivers and superregenerative receivers. Typical applications of these receivers include wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220. This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFMi's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

RF3336E

**868.35 MHz
SAW Filter**



**SM3030-6 Case
3.0 x 3.0**

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency @ 25°C	Absolute Frequency	f _C			868.35		MHz
Insertion Loss		IL			2.5	4.0	dB
3 dB Bandwidth		BW ₃		500	650	900	kHz
Attenuation: (relative to ILmin)	10 - 700 MHz			50	55		dB
	700 - 830 MHz			40	45		
	830 - 850 MHz			35	40		
	850 - 864.4 MHz			20	25		
	870.4 - 877.4 MHz			21	26		
	877.4 - 882.4 MHz			15	19		
	882.4 - 900 MHz			28	35		
	900 - 1000 MHz			40	45		
Temperature	Freq. Temp. Coefficient	FTC			0.032		ppm/°C ²
Frequency Aging	Absolute Value during the First Year	fA			<±10		ppm/yr
Impedance @ f _C	Z _{IN} = R _{IN} C _{IN}	Z _{IN}		55 Ω 23.9 pF			
	Z _{OUT} = R _{OUT} C _{OUT}	Z _{OUT}		53 Ω 20.2 pF			
Lid Symbolization (in addition to Lot and/or Date Codes)		700, <u>YWWS</u>					
Standard Reel Quantity	Reel Size 7 Inch			500 Pieces/Reel			
	Reel Size 13 Inch			3000 Pieces/Reel			




CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


NOTES:

1. The design, manufacturing process, and specifications of this device are subject to change.
2. US or International patents may apply.
3. RoHS compliant from the first date of manufacture.

Frequency Repsonse Plots

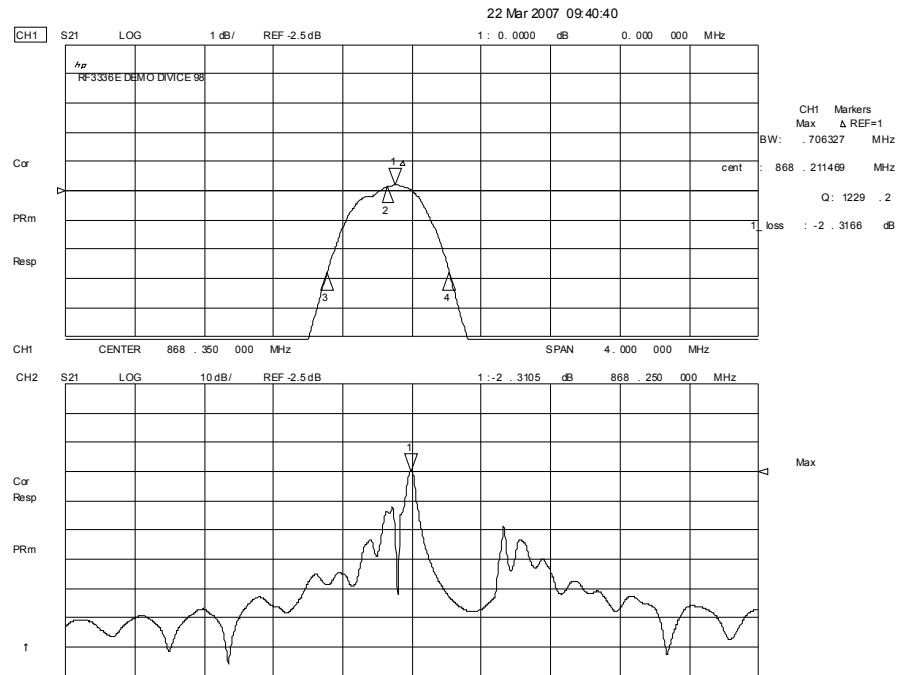


Impedance Plots

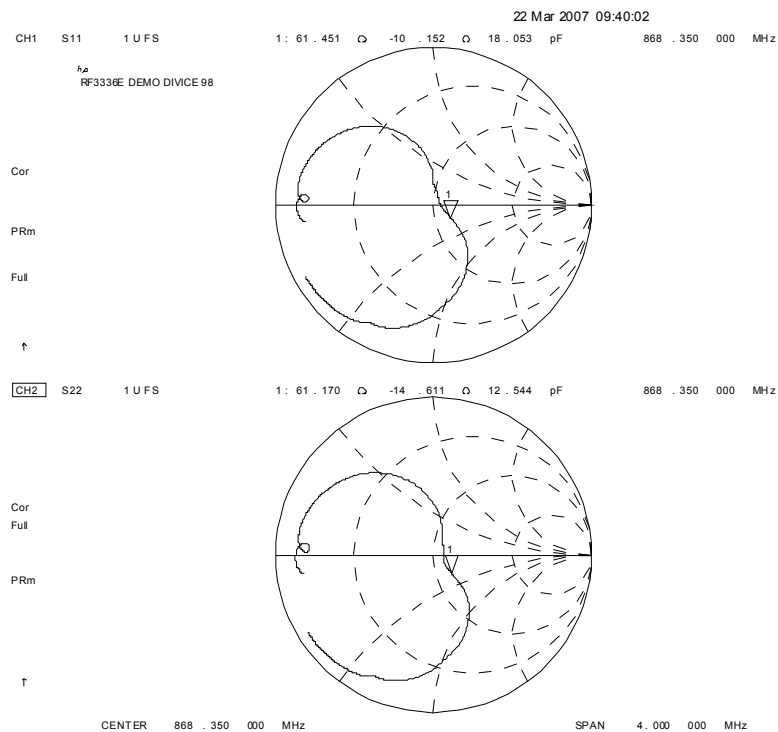

Rating	Value	Units
Input Power Level	10	dBm
DC Voltage on any non-ground Terminal	12	VDC
Storage Temperature	-40 to +125	°C
Operable Temperature Range	-40 to +125	°C
Soldering Temperature (10 seconds / 5 cycles Max.)	260	°C


Electrical Connections

Pin	Connection
1	Input Ground
2	Input
3	Case Ground
4	Output Ground
5	Output
6	Ground

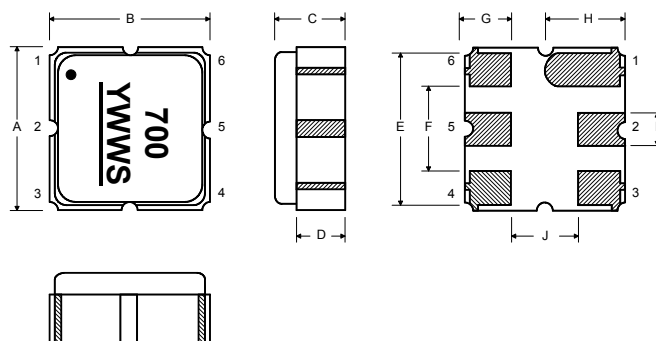

Case Dimensions

Matching Circuit to 50Ω

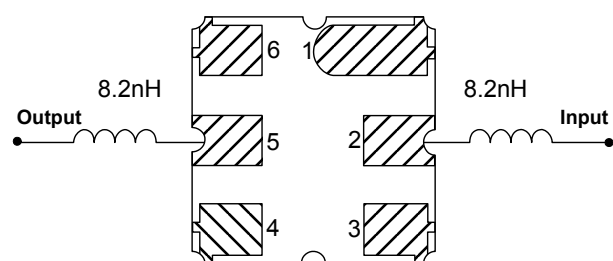


Optional

Electrical Connections

Pin	Connection
1	Input
2	Input Ground
3	Case Ground
4	Output
5	Output Ground
6	Ground

Matching Circuit to 50Ω

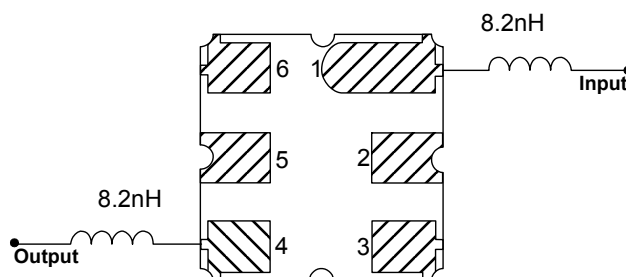

Recommended Reflow Profile

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (10 seconds).
4. Time: 5 times maximum.

