



HX-SCE

Low Fire Hazard

HEAT SHRINK IDENTIFICATION SYSTEM

Technical Datasheet

TTDS-108 Revision 8 - Jan 2026

Low Fire Hazard, Heat Shrink Identification Marker Sleeving for the identification of wires and cables.

HX-SCE heat-shrinkable identification sleeving is for use in applications where low fire hazard characteristics are critical.

HX-SCE is a thin wall, heat shrink tube, manufactured from polyolefin with e-beam technology that gives users the ability to shrink the supplied tube with no damage to material or printed text. Shrinking the tube will ensure the printed mark has a firm hold on the wire.

HX-SCE gives market leading print performance when used as a complete system, as recommended by TE Connectivity. Refer to TE document 411-121005 IDENTIFICATION PRINTER PRODUCT RIBBON MATRIX for the recommended printer/product/ribbon combinations.

Printed sleeves meet the rail specification EN45545-2 R22/R23/R24 Hazard level 3.

HX-SCE Heat Shrink Identification Marker Sleeving is available as part of a complete identification system. The system comprises specific printers, thermal transfer ribbons and WINTOTAL software

PAGE 1

Features

- Self-extinguishing, non-flame propagating
- Zero halogen
- Low Toxic Fumes
- Low Smoke
- Excellent resistance to burning
- Resistant to key Industrial and Rail fluids
- Pre-termination Cable Identification
- Sleeve diameters from 2.4mm to 38.1mm
- 2:1 Shrink ratio

Product Compliance

- HX-SCE fully complies with 2011/65/EU RoHS II directive, and Regulation (EC) number 1907/2006 (REACH)
- Does not contain any declarable or prohibited substances from the UNIFE Railway Industry Substances List
- Further information and a downloadable declaration covering RoHS and REACH compliance can be found at the TE Product Compliance Support Centre: <http://www.te.com/usa-en/utilities/product-compliance.html>

Temperature Rating

-55°C to 105°C (-67°F to 221°F)

Shelf Life

- Refer to TE document 408-121006 Cable Identification Shelf Life Document

Applications



Specifications / Approvals

TE Connectivity Standard RW-2072 Low Fire Hazard Heat Shrink Sleeving

Rail Standards

EN45545-2, Railway applications - Fire protection on railway vehicles, Part 2: Requirements for fire behaviour of materials and components

Fire Hazard Classification 3, in accordance with requirement sets R22, R23 and R24

BS 6853 Code of Practice for Fire Precautions in the Design and Construction of Passenger Carrying Trains. Vehicle CAT 1A

NFPA 130 Standard for Fixed Guideway Transit and Passenger Rail Systems, Fire protection requirements, Interior Fire Propagation Resistance

NF F 16-101 Railway Rolling Stock Fire Behaviour Choice of Material.
Classification A1

SHAZAINENNISHI, Japan Railway Rolling Stock & Machinery Association 2003
Classification 'Flame Retardant' Serial Number 2015-165K

London Underground 1-085. Fire Safety Performance of Materials


Print Performance

- MIL 202 Method 215, Resistance to Solvents
- SAE AS 5942, Marking of Electrical Insulating Materials, Adherence
- RW-2072


Where possible, TE have tested product as a finished item, including the print. Operational tests are followed by an assessment of mark adherence to validate fit form and function. Further details can be found in TE standard RW-2072

HX-SCE

Low Fire Hazard

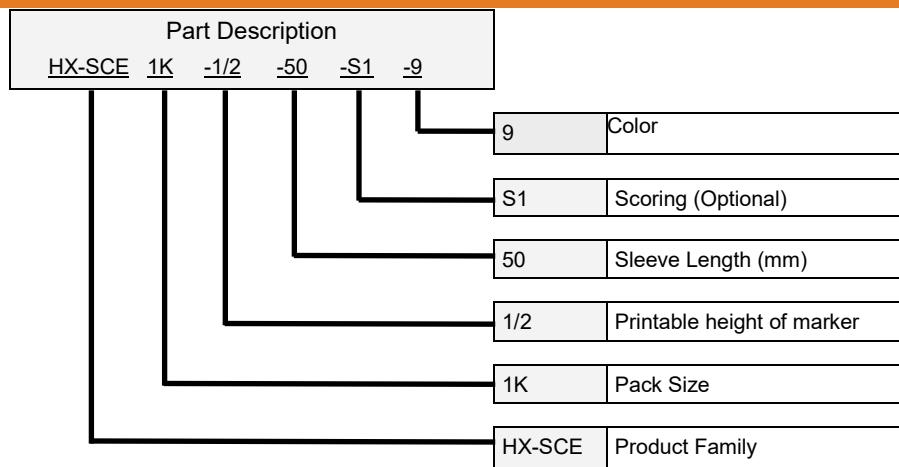

Available Options

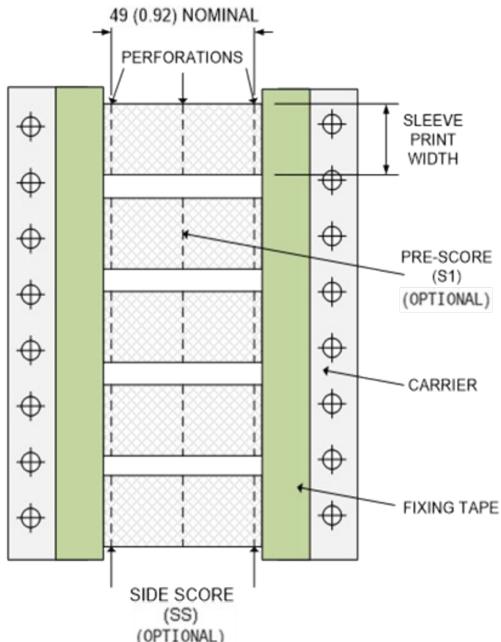


Pre-scoring	Perforated score to produce multiple marker sleeves from each HX-SCE sleeve			
Standard	Not Scored	Code	Blank	
Non-standard	Side scored	Code	SS	
	Side scored + 1 pre score	Code	SS1	
	1 pre score	Code	S1	
	2 pre scores	Code	S2	
	3 pre scores	Code	S3	
Packaging size	No code	<blank> 250 piece reels available in all sizes		
Non Standard	0.5K -	500 piece reels available in size 38.1		
Standard	1K -	1000 piece reels available for all sizes up to 25.4		
Non Standard	2.5K -	2500 piece reels available for sizes up to 9.5		
Non Standard	5K -	5000 piece reels available for sizes 2.4 and 3.2		
Colors	Standard	Yellow	White	
Code	4	9		
Non Standard	Red	Green	Blue	Orange
Code	2	5	6	3

Specify product name, pack size, sleeve size, sleeve length (always 50), pre-score (leave blank if not required) and color

Ordering Information


Ordering description	Inside diameter				Recovered wall thickness (nominal)	Weight (nominal)	Recommended cable diameter use range				
	As supplied (minimum)		After recovery (maximum)								
	mm	inches	mm	inches			mm	inches			
HX-SCE - <pack size> - 2.4 - 50 - <score> - <color>	2.38	0.094	1.19	0.047	0.50	0.21	1.2	to	1.9		
HX-SCE - <pack size> - 3.2 - 50 - <score> - <color>	3.18	0.125	1.58	0.063	0.50	0.26	1.7	to	2.6		
HX-SCE - <pack size> - 4.8 - 50 - <score> - <color>	4.76	0.188	2.38	0.094	0.51	0.37	2.5	to	4.0		
HX-SCE - <pack size> - 6.4 - 50 - <score> - <color>	6.35	0.250	3.18	0.125	0.65	0.62	3.8	to	5.4		
HX-SCE - <pack size> - 9.5 - 50 - <score> - <color>	9.53	0.375	4.76	0.188	0.65	0.87	5.2	to	8.1		
HX-SCE - <pack size> - 12.7 - 50 - <score> - <color>	12.70	0.500	6.35	0.250	0.65	1.13	6.9	to	10.7		
HX-SCE - <pack size> - 19.0 - 50 - <score> - <color>	19.05	0.750	9.53	0.375	0.75	1.90	10.1	to	16.2		
HX-SCE - <pack size> - 25.4 - 50 - <score> - <color>	25.40	1.000	12.70	0.500	0.90	3.06	14.2	to	21.5		
HX-SCE - <pack size> - 38.1 - 50 - <score> - <color>	38.10	1.500	19.00	0.750	1.00	4.96	20.9	to	33.0		

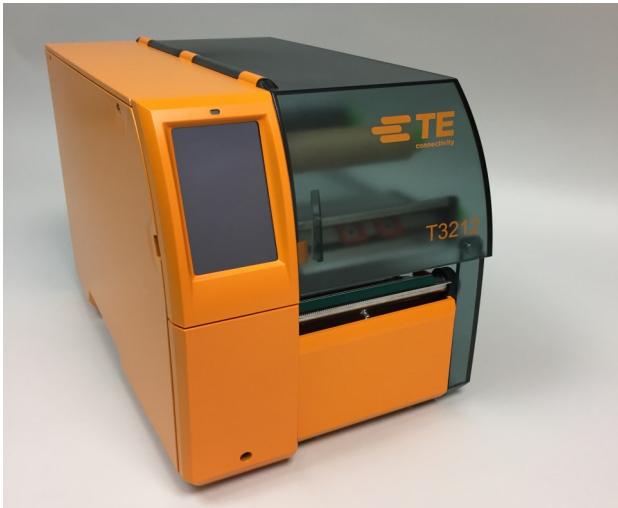

Printer Information

Print quality and print performance can only be guaranteed when specific TE printer and ribbons are used.

The current list of printers and ribbons can be found in TE document 411-121005 'Identification Printer Product Ribbon Matrix'. This document can be found in TE.com resource

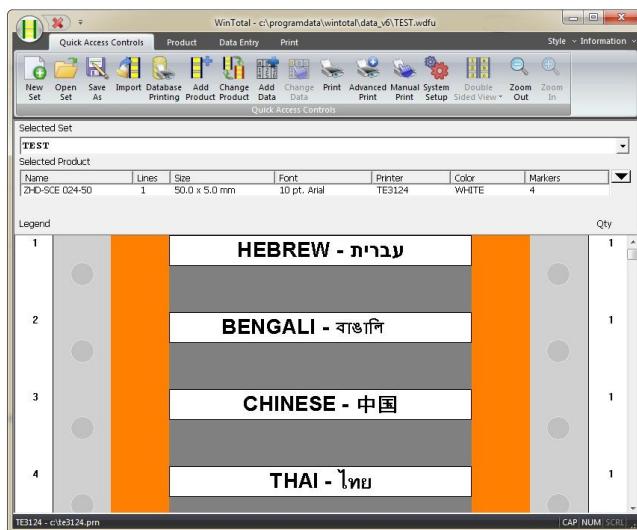

Software

WINTOTAL software, available to download for a 14 day evaluation period from the Identification Printer Software page:

<http://www.te.com/wintotal>

Contact a TE representative for further information



www.te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2026 TE Connectivity Ltd. family of companies All Rights Reserved.