

## UR20-PF-O

**Weidmüller Interface GmbH & Co. KG**


Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

### Product image

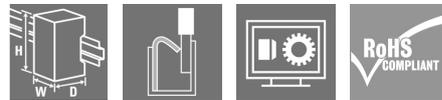

### 10 A feeding; input or output current path; diagnosis display

Weidmüller power feed modules are available to refresh the power of the input and output current path. Monitored by the voltage diagnosis display, these feed 10 A in the corresponding input or output path. A time-saving start-up is guaranteed by the standard u-remote plug with proven and tested "PUSH IN" technology for reliable contacts. The power supply is monitored by a diagnosis display.

### General ordering data

Version	Remote I/O module, IP20, Power supply unit, 24 VDC-Output
Order No.	<a href="#">1334740000</a>
Type	UR20-PF-O
GTIN (EAN)	4050118138122
Qty.	1 pc(s).
Replacement parts	<a href="#">1350950000</a> <a href="#">1347420000</a> <a href="#">1346480000</a>

Creation date June 12, 2025 5:44:34 PM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

## UR20-PF-O

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	76 mm	Depth (inches)	2.992 inch
Height	120 mm	Height (inches)	4.724 inch
Width	11.5 mm	Width (inches)	0.453 inch
Mounting dimension - height	128 mm	Net weight	76 g

## Temperatures

Storage temperature	-40 °C ... +85 °C	Operating temperature	-20 °C...60 °C
---------------------	-------------------	-----------------------	----------------

## Connection data

Type of connection	PUSH IN	Wire connection cross section, finely stranded, max.	1.5 mm <sup>2</sup>
Wire connection cross section, finely stranded, min.	0.14 mm <sup>2</sup>	Wire cross-section, finely stranded, max. (AWG)	AWG 16
Wire cross-section, finely stranded, min. (AWG)	AWG 26	Wire cross-section, solid, max.	1.5 mm <sup>2</sup>
Wire cross-section, solid, max. (AWG)	AWG 16	Wire cross-section, solid, min.	0.14 mm <sup>2</sup>
Wire cross-section, solid, min. (AWG)	AWG 26		

## General data

Air humidity (operation)	10% to 95%, non-condensing as per DIN EN 61131-2	Air humidity (storage)	10% to 95%, non-condensing as per DIN EN 61131-2
Air humidity (transport)	10% to 95%, non-condensing as per DIN EN 61131-2	Air pressure (operation)	≥ 795 hPa (height ≤ 2000 m) as per DIN EN 61131-2
Air pressure (storage)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2	Air pressure (transport)	1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2
Pollution severity	2	Rail	TS 35
Shock	15 g over 11 ms, half sinus wave, acc. to IEC 60068-2-27	Surge voltage category	II
Test voltage	500 V	UL 94 flammability rating	V-0
Vibration resistance	5 Hz ≤ f ≤ 8.4 Hz: 3.5-mm amplitude as per IEC 60068-2-6, 8.4 Hz ≤ f ≤ 150 Hz: 1 g acceleration as per IEC 60068-2-6		

## Power supply

Current consumption from I <sub>OUT</sub> (the respective power segment)	<10 mA	Feed current for I <sub>OUT</sub> (output current path) , max.	10,000 mA
Supply voltage for outputs	24 V DC +20 %/ -15 %		

## System data

Field bus protocol	PROFINET IRT, PROFINET RT, PROFIBUS DP-V1, EtherCAT, Modbus/TCP, EtherNet/IP, CANopen, DeviceNet, POWERLINK, CC-Link, CC-Link IE TSN, IEC 61162-450	Interface	u-remote system bus
Module type	Power-feed module		

Creation date June 12, 2025 5:44:34 PM CEST

Catalogue status 07.06.2025 / We reserve the right to make technical changes.

2

**UR20-PF-0**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

**Classifications**

ETIM 6.0	EC001600	ETIM 7.0	EC001600
ETIM 8.0	EC001600	ETIM 9.0	EC001600
ETIM 10.0	EC001600	ECLASS 9.0	27-24-26-10
ECLASS 9.1	27-24-26-10	ECLASS 10.0	27-24-26-10
ECLASS 11.0	27-24-26-10	ECLASS 12.0	27-24-26-10
ECLASS 13.0	27-24-26-10	ECLASS 14.0	27-24-26-10
ECLASS 15.0	27-24-26-10		

**Environmental Product Compliance**

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	7a, 7cl
REACH SVHC	Lead 7439-92-1
SCIP	82327f13-cd27-455a-ab5b-a62e1996dcf8

**Approvals**

Approvals



Approvals MAMID

[https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319212/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319212/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319215/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319215/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319217/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319217/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319220/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319220/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319222/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319224/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319224/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319228/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319228/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_322323/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_322323/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319213/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319213/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319234/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319234/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319240/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319240/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319245/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319245/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319247/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319247/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319249/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319249/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319255/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319255/-T1z1mm-S800/) [https://mdcop.weidmueller.com/mediadelivery/rendition/900\\_319260/-T1z1mm-S800/](https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/)

ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E141197
Certificate no. (cULusEX)	E223527

## UR20-PF-O

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">KC certificate</a> <a href="#">Compass safe distance certificate</a> <a href="#">Lloyds Register certificate</a> <a href="#">DNV certificate</a> <a href="#">ABS certificate</a> <a href="#">RINA certificate</a> <a href="#">Bureau Veritas - Type Approval Certificate</a> <a href="#">PRS (Polish Register of Shipping)</a> <a href="#">NIPPON KAIJI KYOKAI Certificate - ClassNK</a> <a href="#">DEMKO 15ATEX1525X</a> <a href="#">KR Korean register certificate</a> <a href="#">CCS certificate</a> <a href="#">CCS certificate</a> <a href="#">UKCA Declaration of Conformity - EN</a> <a href="#">CE Declaration of Conformity - DE</a>
Engineering Data	<a href="#">CAD data – STEP</a> <a href="#">Compatibility information – Combinability of UR20</a>
User Documentation	<a href="#">Handbuch u-remote DE</a> <a href="#">Manual u-remote EN</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

**Data sheet**


**UR20-PF-O**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

**Drawings**

**Block diagram**

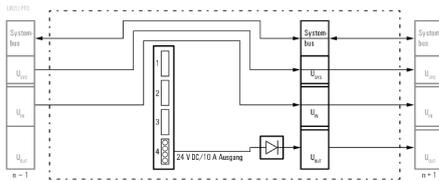

**Connection diagram**

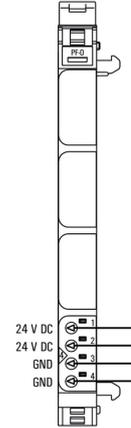

**Explanation of abbreviations**

**Power-feed modules**

