

E4MS047120U2

Silicon Carbide Power MOSFET
Switching Optimized 1200 V 47 mΩ Automotive
N-Channel Enhancement Mode

Features

- Industry compatible drive voltage 15 V...18 V/-5 V...0 V
- Soft body diode with low Vds overshoot and ringing
- Low Rds(on) at high operating temperatures
- Improved device capacitances ratio (Ciss/Crss)
- High transient voltage robustness with improved lifetime
- Halogen free, RoHS compliant
- Automotive Qualified (AEC-Q101) and PPAP Capable



Benefits

- Higher efficiency with lower switching losses and EMI
- Faster switching operation enabling high power density
- Enables system level price performance optimization
- Reduction in system level cooling requirements

Typical Applications

- Motor Control
- EV On Board Battery Chargers (OBC)
- Automotive DC/DC Converters for EV/HEV

Package



Orderable Part number	Package type	Marking
E4MS047120U2-TR	TSC (U2)	E4MS047120U2

Key Parameters

Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions	Note
Drain - Source Voltage	V_{DS}			1200	V		
Maximum Gate - Source Voltage	$V_{GS(max)}$	-10		+23		Note 1	
DC Continuous Drain Current	I_D			48	A	$V_{GS} = 18 V, T_C = 25 ^\circ C, T_J \leq 175 ^\circ C$	Note 2
				35		$V_{GS} = 18 V, T_C = 100 ^\circ C, T_J \leq 175 ^\circ C$	
Pulsed Drain Current	I_{DM}			147		t_{Pmax} limited by T_{Jmax} $V_{GS} = 18 V, T_C = 25 ^\circ C$	
Power Dissipation	P_D			217	W	$T_C = 25 ^\circ C, T_J = 175 ^\circ C$	Note 3
Operating Junction and Storage Temperature	T_J, T_{stg}	-55		+175	°C		
Solder Temperature	T_L			260			

Note (1): When applying IPC-9592B or OCP M-CRPS derating standards, a maximum Gate-Source voltage (V_{GS}) of +25 V is permissible.

Note (2): Current limit calculated by $I_{D(max)} = \sqrt{(P_D / R_{DS(typ)} (T_{J(max)} - T_{D(max)}))}$

Note (3): $P_D = (T_J - T_C) / R_{th(JC,max)}$


Electrical Characteristics ($T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	1200			V	$V_{GS} = 0\text{ V}, I_D = 100\ \mu\text{A}$	
$V_{GS(th)}$	Gate Threshold Voltage	2	2.6	3.9	V	$V_{DS} = V_{GS}, I_D = 5.8\ \text{mA}$	Fig. 11
			2.0		V	$V_{DS} = V_{GS}, I_D = 5.8\ \text{mA}, T_J = 175^\circ\text{C}$	
I_{DSS}	Zero Gate Voltage Drain Current		1	50	μA	$V_{DS} = 1200\ \text{V}, V_{GS} = 0\ \text{V}$	
I_{GSS}	Gate-Source Leakage Current		10	250	nA	$V_{GS} = 18\ \text{V}, V_{DS} = 0\ \text{V}$	
$V_{GS(op)}$	Recommended Turn on Gate-Source Voltage		+15...+18		V		Refer to PRD-09634
	Recommended Turn off Gate-Source Voltage		-5...0				
$R_{DS(on)}$	Drain-Source On-State Resistance		47	61	m Ω	$V_{GS} = 18\ \text{V}, I_D = 21\ \text{A}$	Fig. 4, 5, 6
			89			$V_{GS} = 18\ \text{V}, I_D = 21\ \text{A}, T_J = 175^\circ\text{C}$	
			53			$V_{GS} = 15\ \text{V}, I_D = 21\ \text{A}$	
g_{fs}	Transconductance		15		S	$V_{DS} = 20\ \text{V}, I_D = 21\ \text{A}, T_J = 25^\circ\text{C}$	Fig. 7
			15			$V_{DS} = 20\ \text{V}, I_D = 21\ \text{A}, T_J = 175^\circ\text{C}$	
$R_{DS(on)Tempco}$	On Resistance Temperature Coefficient		1.88			$V_{GS} = 18\ \text{V}, I_D = 21\ \text{A}$	Note 4
C_{iss}	Input Capacitance		1640		pF	$V_{GS} = 0\ \text{V}, V_{DS} = 1000\ \text{V}$ $f = 100\ \text{kHz}$ $V_{AC} = 25\ \text{mV}$	Fig. 17, 18
C_{oss}	Output Capacitance		57				
C_{rss}	Reverse Transfer Capacitance		3				
C_{iss}/C_{rss}	Capacitance Ratio		630				Note 5
E_{oss}	C_{oss} Stored Energy		37		μJ		Fig. 16
$C_{o(er)}$	Effective Output Capacitance (Energy Related)		83		pF	$V_{GS} = 0\ \text{V}, V_{DS} = 0\ \dots\ 800\ \text{V}$	
$C_{o(tr)}$	Effective Output Capacitance (Time Related)		136				
E_{on}	Turn-On Switching Energy (Body Diode FWD) $T_J = 25^\circ\text{C}$ $T_J = 175^\circ\text{C}$		216		μJ	$V_{DS} = 800\ \text{V}, V_{GS} = -4\ \text{V}/18\ \text{V},$ $I_D = 21\ \text{A},$ $R_{G(ext)} = 2\ \Omega, L_\sigma = 25\ \text{nH}$	Fig. 26, 29, 31
			242				Fig. 26, 29, 32
E_{off}	Turn-Off Switching Energy (Body Diode FWD) $T_J = 25^\circ\text{C}$ $T_J = 175^\circ\text{C}$		28		μJ		Fig. 26, 29, 32
			30				
$t_{d(on)}$	Turn-On Delay Time		10		ns	$V_{DD} = 800\ \text{V}, V_{GS} = -4\ \text{V}/18\ \text{V}$ $I_D = 21\ \text{A}, R_{G(ext)} = 2\ \Omega,$ Timing relative to V_{DS} Inductive load	Fig. 27, 28
t_r	Rise Time		2				
$t_{d(off)}$	Turn-Off Delay Time		23				
t_f	Fall Time		4				
$R_{G(int)}$	Internal Gate Resistance		2.8		Ω	$f = 1\ \text{MHz}$	
Q_{gs}	Gate to Source Charge		18		nC	$V_{DS} = 800\ \text{V}, V_{GS} = -4\ \text{V}/18\ \text{V}$ $I_D = 21\ \text{A}, T_J = 25^\circ\text{C}$ Per IEC60747-8-4 pg 21	Fig. 12
Q_{gd}	Gate to Drain Charge		18				
Q_g	Total Gate Charge		68				

Note (4): $R_{DS(on)Tempco}$ refers to $R_{DS(on)}$ at 175°C / $R_{DS(on)}$ at 25°C , E4MS 1200V product family value

Note (5): Capacitance ratio is a FOM for Partial turn-on immunity PRD-06933, E4MS 1200 V product family value

$C_{o(er)}$, a lumped capacitance that gives the same stored energy as C_{oss} while V_{ds} is rising from 0 to 800 V

$C_{o(tr)}$, a lumped capacitance that gives the same charging time as C_{oss} while V_{ds} is rising from 0 to 800 V



Reverse Diode Characteristics ($T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V_{SD}	Diode Forward Voltage	5.2		V	$V_{GS} = -4\text{ V}, I_{SD} = 10.5\text{ A}, T_J = 25^\circ\text{C}$	Fig. 8, 9, 10
		4.6		V	$V_{GS} = -4\text{ V}, I_{SD} = 10.5\text{ A}, T_J = 175^\circ\text{C}$	
I_S	Continuous Diode Forward Current		33	A	$V_{GS} = -4\text{ V}, T_c = 25^\circ\text{C}$	
I_{SM}	Diode Pulse Current		147	A	$V_{GS} = -4\text{ V}$, pulse width t_p limited by T_{jmax}	
t_{rr}	Reverse Recovery Time	12		ns	$V_{GS} = -4\text{ V}, I_S = 21\text{ A}, V_{SD} = 800\text{ V}$ $T_J = 175^\circ\text{C}, diF/dt = 12.7\text{ A/ns}$	
Q_{rr}	Reverse Recovery Charge	449		nC		
I_{RRM}	Peak Reverse Recovery Current	65		A		
E_{RR}	Reverse Recovery Energy	$T_J = 25^\circ\text{C}$	61	μJ	$V_{DS} = 800\text{ V}, I_D = 21\text{ A}$, $V_{GS} = -4\text{ V}/18\text{ V}, R_{G(on)} = 2\ \Omega, L_G = 25\text{ nH}$	
		$T_J = 175^\circ\text{C}$	140			

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	0.53	0.69	$^\circ\text{C/W}$		



Typical Performance

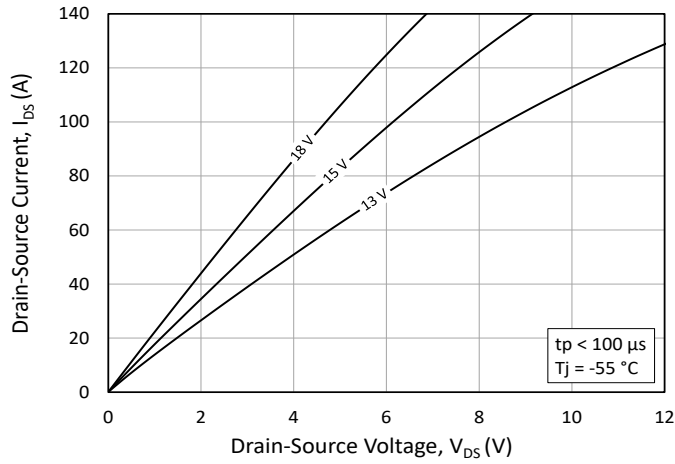


Figure 1. Output Characteristics $T_j = -55^\circ\text{C}$

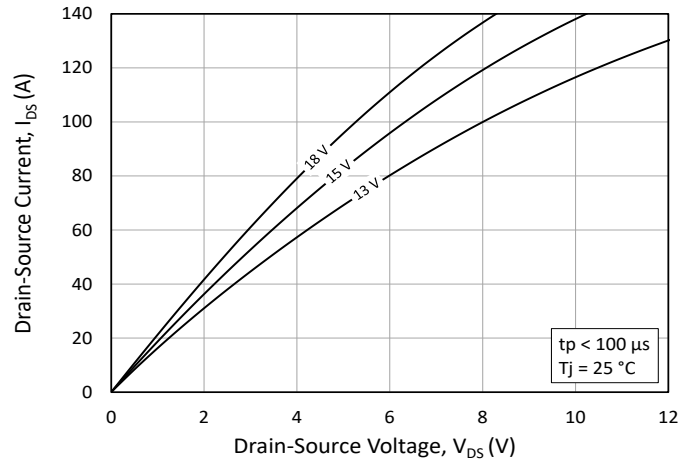


Figure 2. Output Characteristics $T_j = 25^\circ\text{C}$

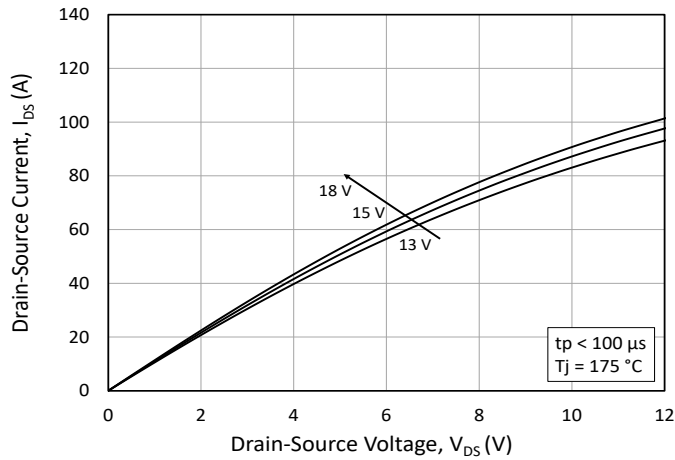


Figure 3. Output Characteristics $T_j = 175^\circ\text{C}$

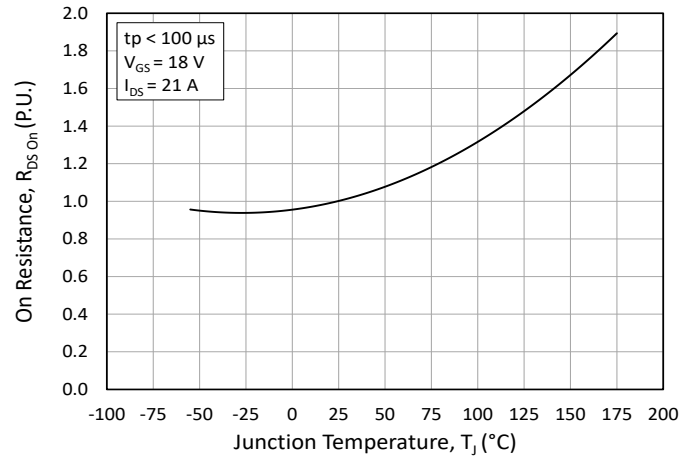


Figure 4. Normalized On-Resistance vs. Temperature

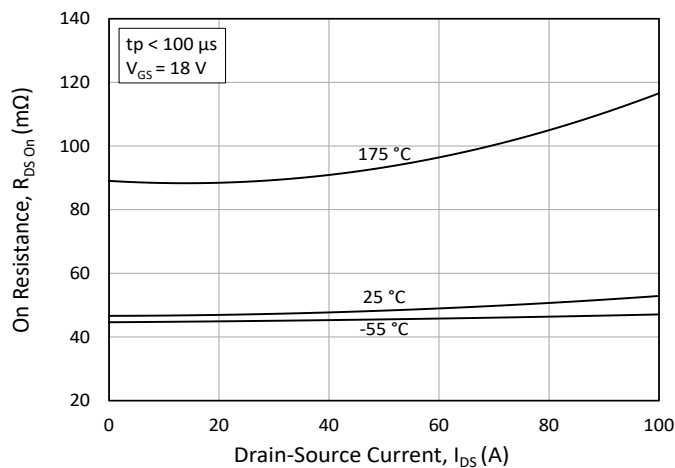


Figure 5. On-Resistance vs. Drain Current For Various Temperatures

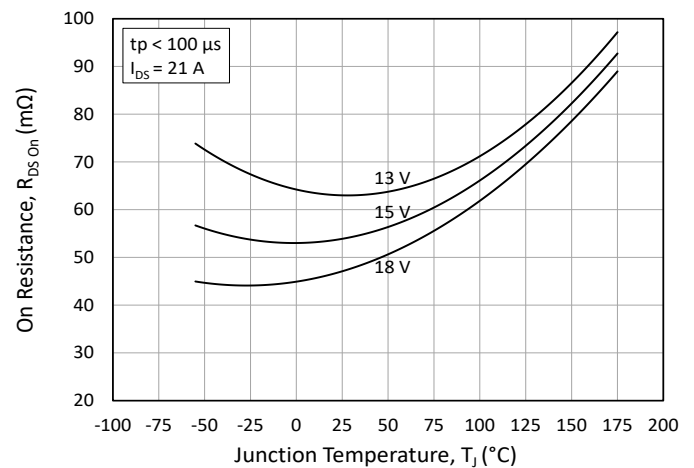


Figure 6. On-Resistance vs. Temperature For Various Gate Voltage



Typical Performance

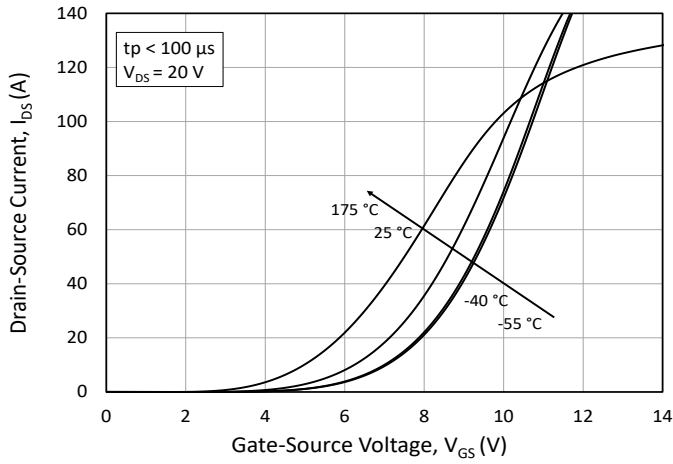


Figure 7. Transfer Characteristic for Various Junction Temperatures

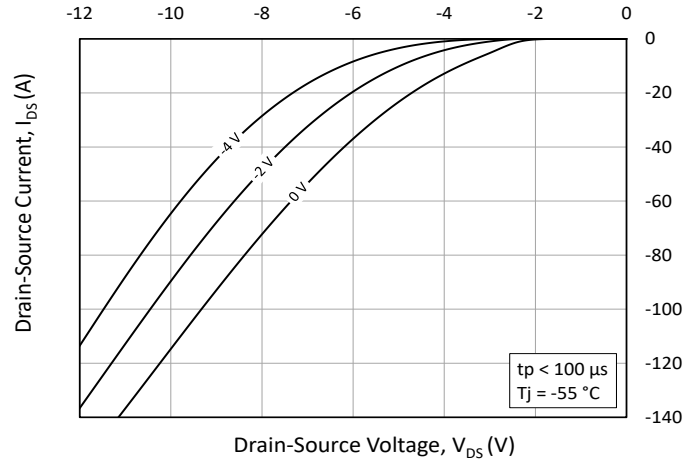


Figure 8. Body Diode Characteristic at -55 °C

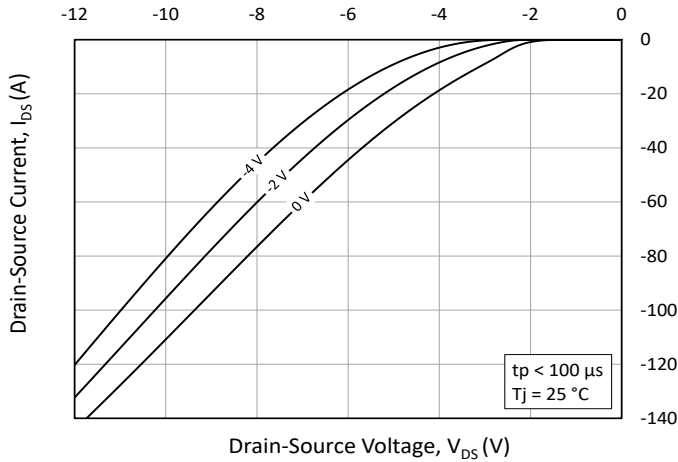


Figure 9. Body Diode Characteristic at 25 °C

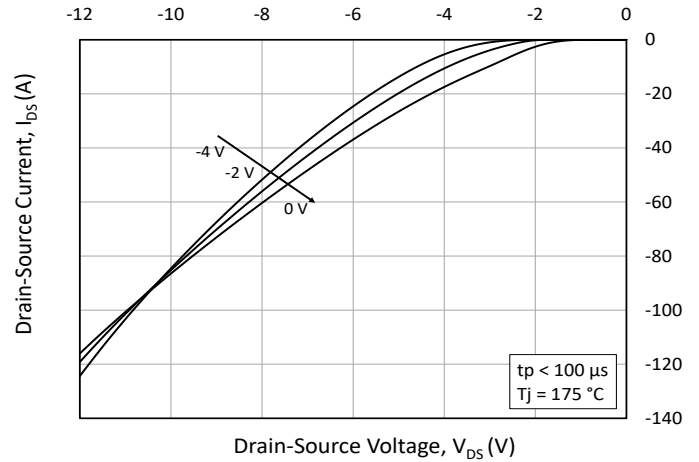


Figure 10. Body Diode Characteristic at 175 °C

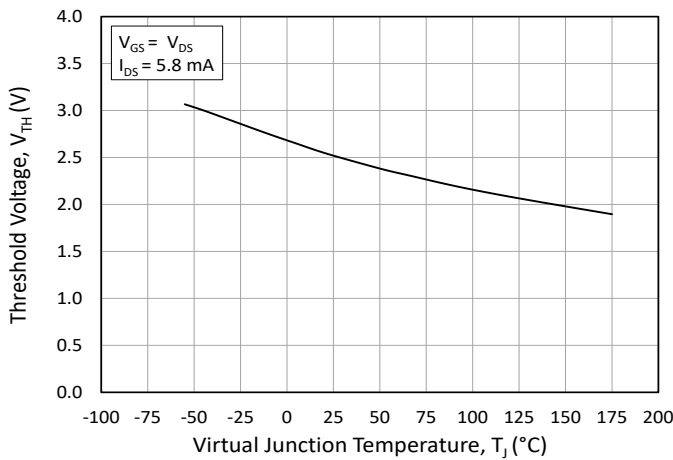


Figure 11. Threshold Voltage vs. Temperature

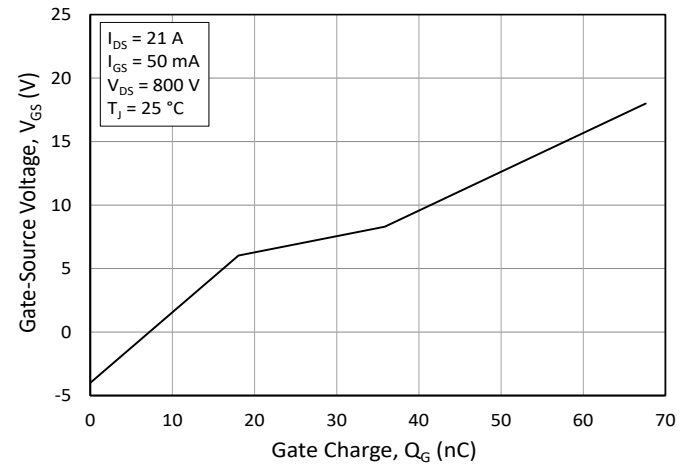


Figure 12. Gate Charge Characteristics



Typical Performance

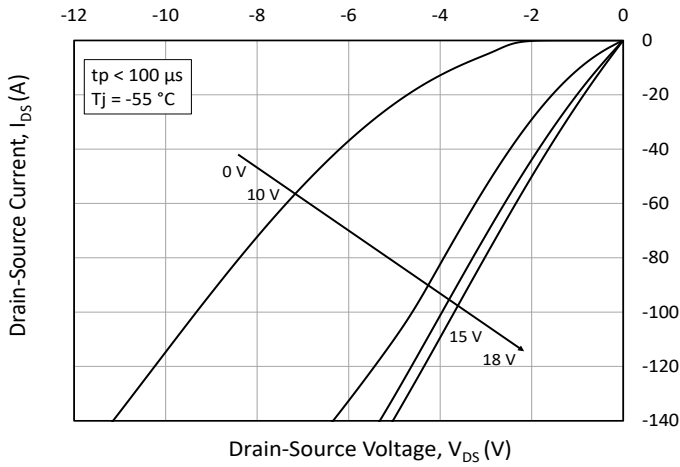


Figure 13. 3rd Quadrant Characteristic at -55°C

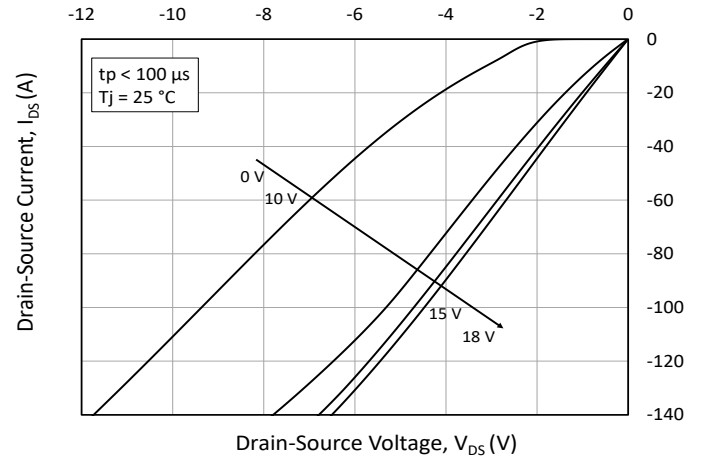


Figure 14. 3rd Quadrant Characteristic at 25°C

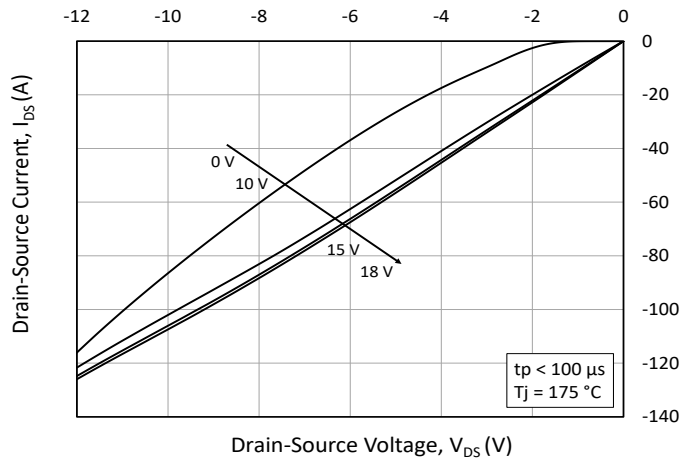


Figure 15. 3rd Quadrant Characteristic at 175°C

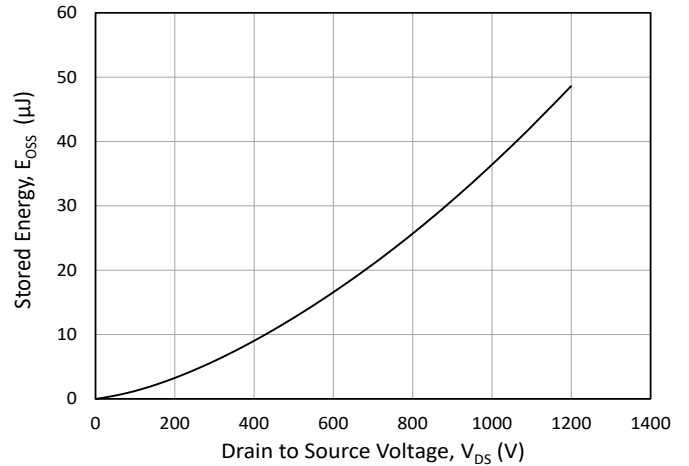


Figure 16. Output Capacitor Stored Energy

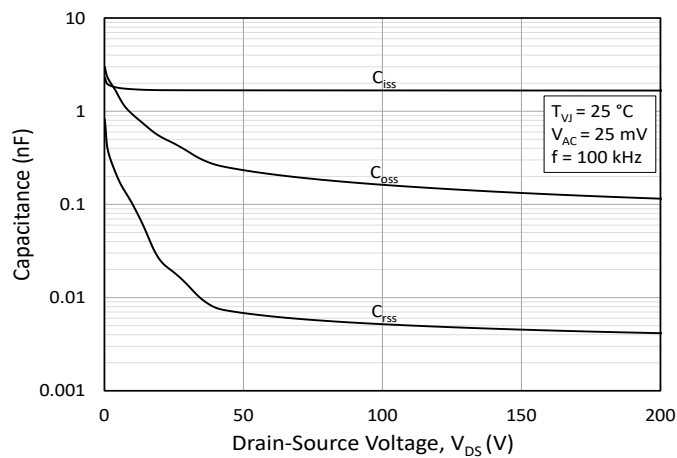


Figure 17. Capacitances vs. Drain-Source Voltage (0 - 200 V)

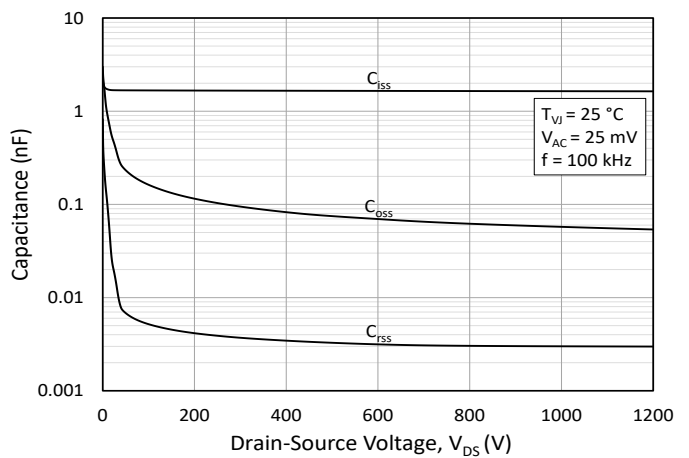


Figure 18. Capacitances vs. Drain-Source Voltage (0 - 1200 V)



Typical Performance

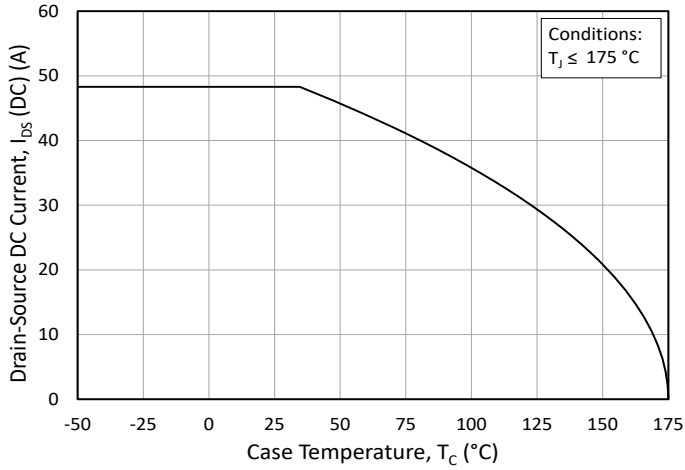


Figure 19. Continuous Drain Current Derating vs. Case Temperature

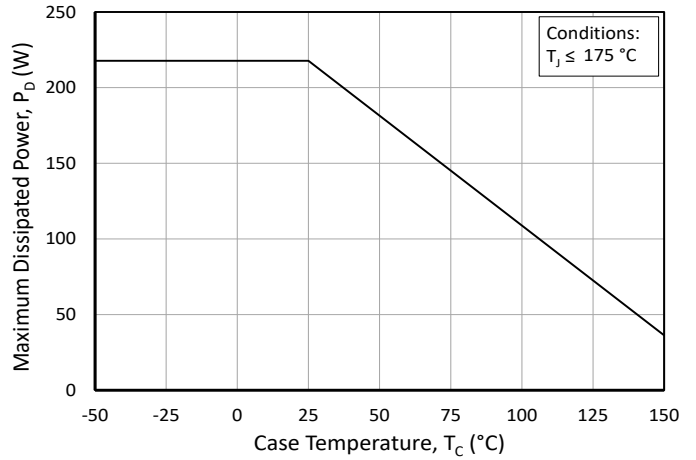


Figure 20. Maximum Power Dissipation Derating vs. Case Temperature

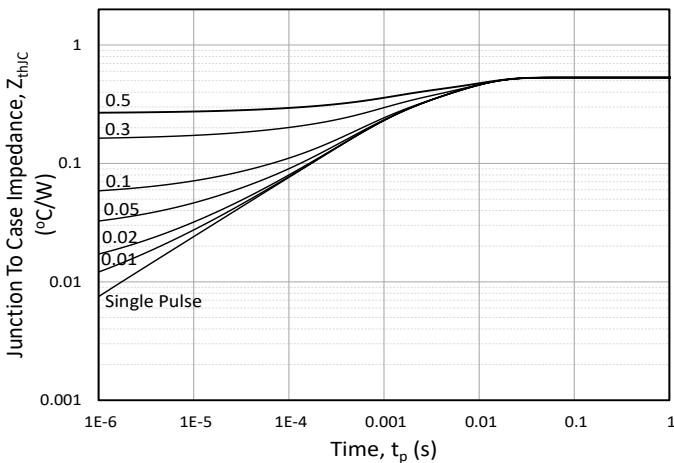


Figure 21. Transient Thermal Impedance (Junction - Case)

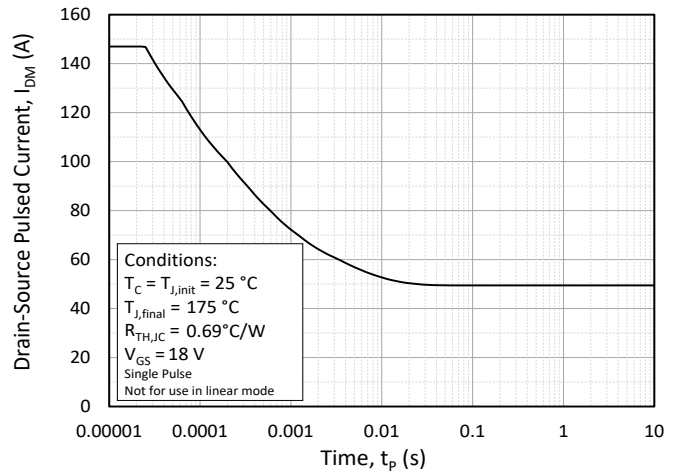


Figure 22. Safe Operating Area

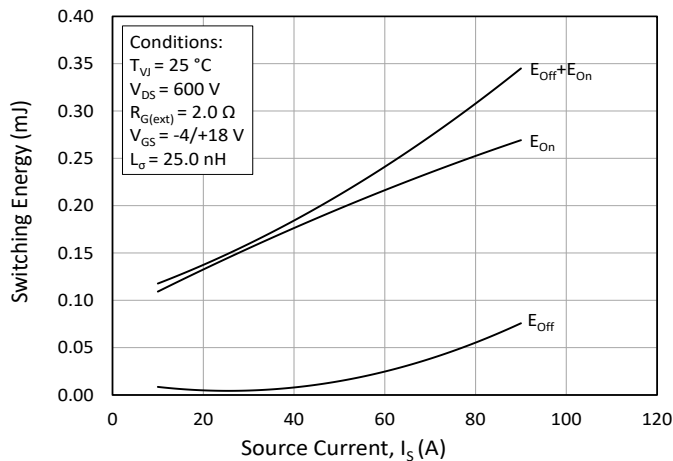


Figure 23. Clamped Inductive Switching Energy vs. Drain Current ($V_{DD} = 600\text{ V}$)

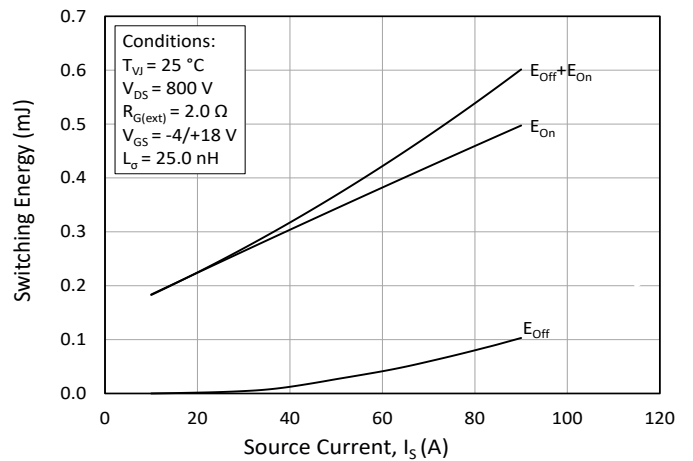


Figure 24. Clamped Inductive Switching Energy vs. Drain Current ($V_{DD} = 800\text{ V}$)

Typical Performance

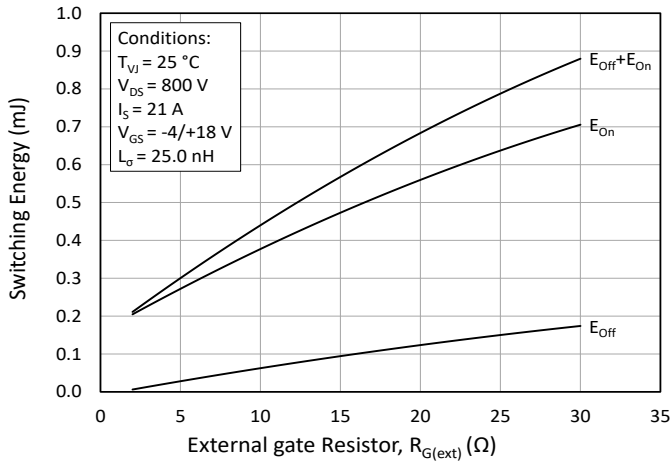


Figure 25. Clamped Inductive Switching Energy vs. $R_{G(ext)}$

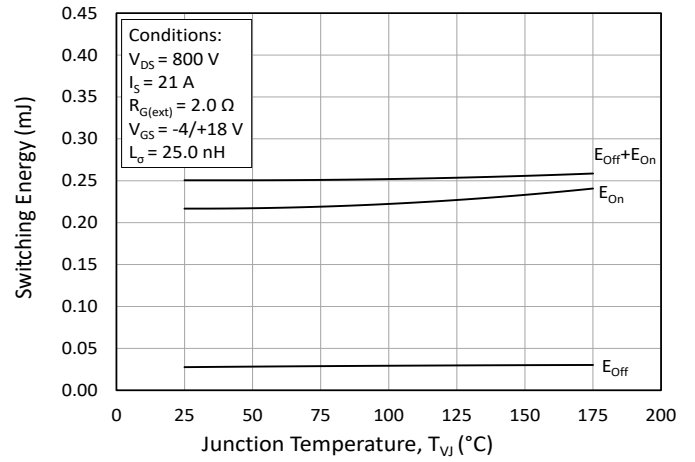


Figure 26. Clamped Inductive Switching Energy vs. Temperature

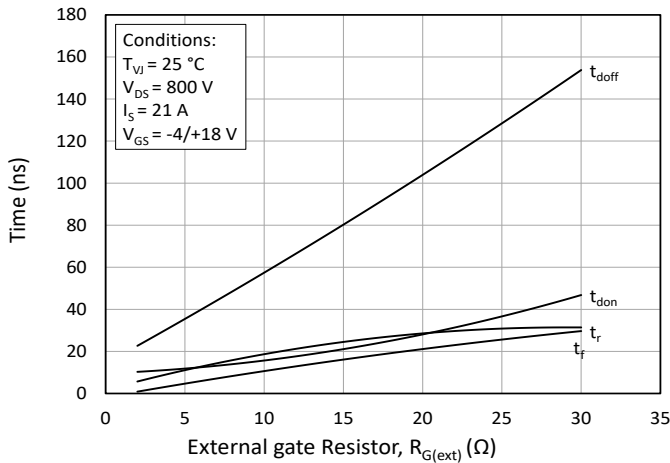


Figure 27. Switching Times vs. $R_{G(ext)}$

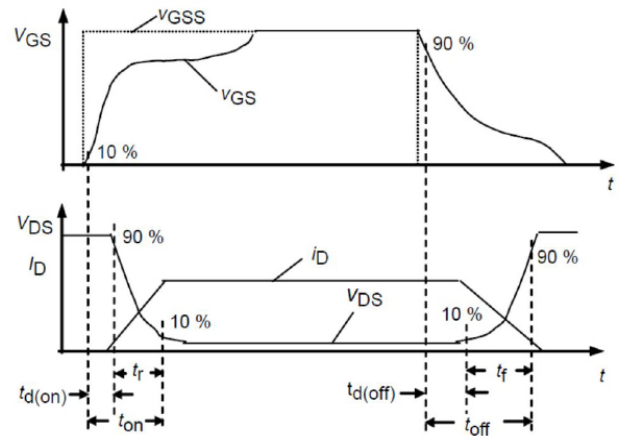


Figure 28. Switching Times Definition

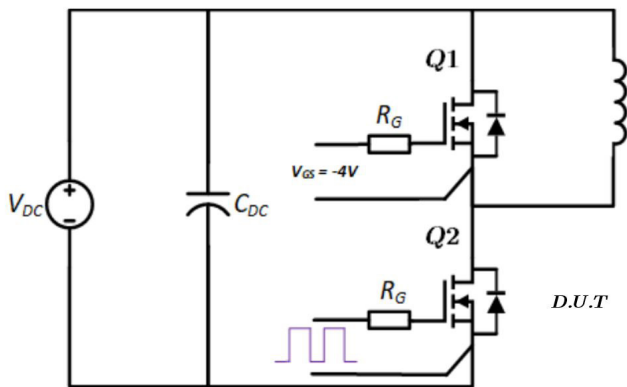


Figure 29. Clamped Inductive MOSFET Switching Waveform Test Circuit


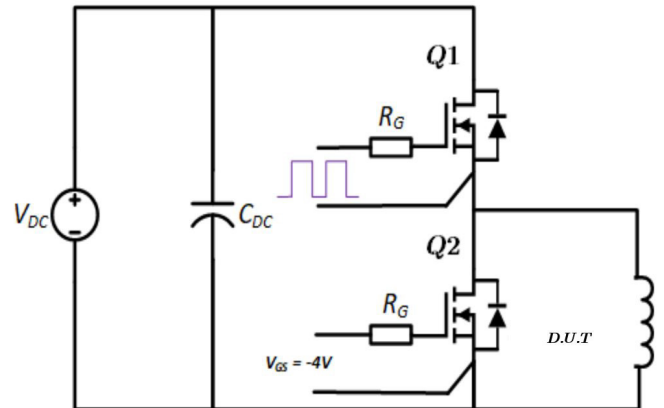


Figure 30. Clamped Inductive Body diode Switching Waveform Test Circuit

Package Dimensions

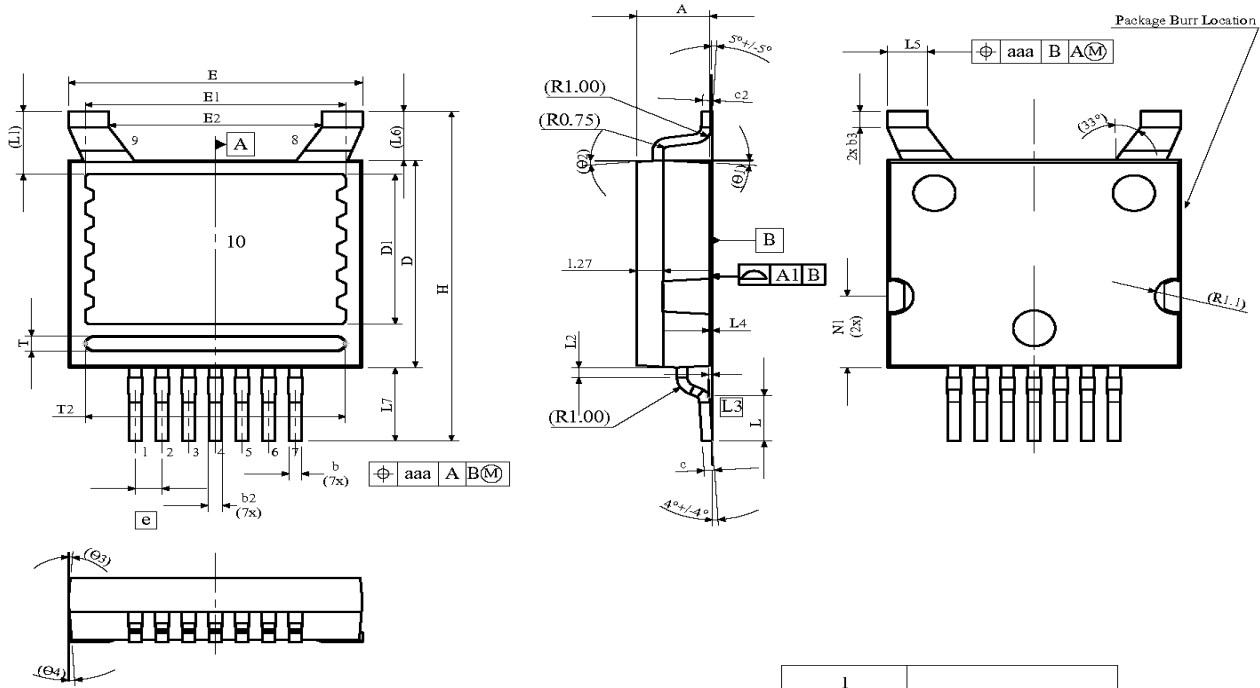

SYMBOL	MIN (mm)	MAX (mm)
A	3.40	3.60
A1	---	0.05
b	0.50	0.70
b2	0.50	1.00
b3	0.85	1.05
c	0.40	0.60
c2	0.40	0.60
D	11.55	11.75
D1	8.30	8.50
E	13.92	14.12
E1	12.22	12.42
E2	9.92	10.22
e	BSC 1.27	
H	18.00	19.00
L	2.47	2.67
L1	BSC 3.51	
L2	0.3	0.73
L3	BSC 0.26	
L4	0.09	0.2
L5	1.83	2.13
L6	BSC 2.75	
L7	4.03	4.23
T	0.75	0.95
T2	12.30	12.50
N1	3.90	4.10
Ø1	0°	8°
Ø2	0°	8°
Ø3	0°	8°
Ø4	0°	8°
---		0.10

1	SOURCE
2	
3	
4	
5	
6	DRIVER SOURCE
7	GATE
8	DRAIN
9	DRAIN
10	DRAIN


NOTE

1. ALL METAL SURFACES ARE TIN PLATED (MATTE), EXCEPT AREA OF CUT.
2. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
3. ALL DIMENSIONS ARE LISTED IN MILLIMETERS. ANGLES ARE IN DEGREES.
4. PACKAGE BURR FLASH SIZE (0.5 mm) IS NOT INCLUDED IN THE DIMENSIONS



Recommended Solder Pad Layout

All dimensions in mm

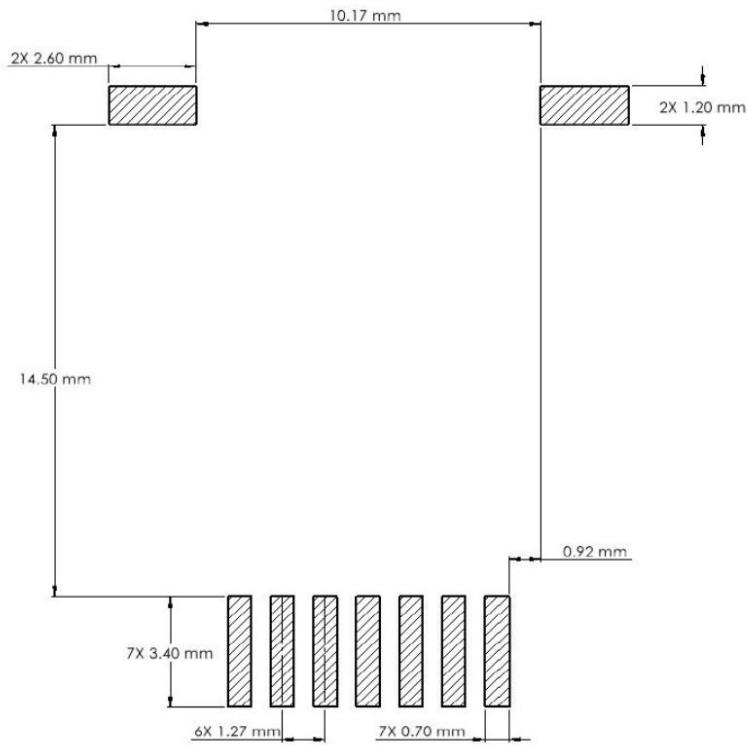



Revision History

Document Version	Date of release	Description of changes
1	November 2025	Initial release
2	January 2026	Addition of Note (1)
3	March 2026	Corrected the labels on Figures 8 and 9 Corrected the pin labels on the device symbol



Notes & Disclaimer

WOLFSPEED PROVIDES TECHNICAL AND RELIABILITY DATA, DESIGN RESOURCES, APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, WITH RESPECT THERETO, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRDPARTY INTELLECTUAL PROPERTY RIGHTS.

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfspeed. No communication from any employee or agent of Wolfspeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

The information contained in this document (excluding examples, as well as figures or values that are labeled as “typical”) constitutes Wolfspeed’s sole published specifications for the subject product. “Typical” parameters are the average values expected by Wolfspeed in large quantities and are provided for informational purposes only. Any examples provided herein have not been produced under conditions intended to replicate any specific end use. Product performance can and does vary due to a number of factors.

This product has not been designed or tested for use in, and is not intended for use in, any application in which failure of the product would reasonably be expected to cause death, personal injury, or property damage. For purposes of (but without limiting) the foregoing, this product is not designed, intended, or authorized for use as a critical component in equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment; air traffic control systems; or equipment used in the planning, construction, maintenance, or operation of nuclear facilities. Notwithstanding any application-specific information, guidance, assistance, or support that Wolfspeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer’s purposes, including without limitation (1) selecting the appropriate Wolfspeed products for the buyer’s application, (2) designing, validating, and testing the buyer’s application, and (3) ensuring the buyer’s application meets applicable standards and any other legal, regulatory, and safety-related requirements.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented February 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Documentation sections of www.wolfspeed.com.

REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfspeed representative to ensure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

Contact info:

4600 Silicon Drive
Durham, NC 27703 USA
Tel: +1.919.313.5300
www.wolfspeed.com/power