

Product Overview

The 101765–400–B is a voltage-controlled SAW oscillator that operates at 400 MHz. The SAW resonator is a high-Q quartz device that enables the circuit to achieve ultra-low phase noise. The oscillator is hermetically sealed in a Kovar package suitable for surface mount installation. The 101765 family is not RoHS compliant as Sn63Pb eutectic solder is used in assembly for tin whisker mitigation. The 101765–400–B is export controlled per EAR 3a001.b.10.

Key Features

- Ultra-low phase noise:
 - -157 dBc/Hz at 10 kHz
 - -176 dBc/Hz floor
- High RF output power: +10.5 dBm
- Single-ended sinewave output
- Wide supply voltage range: 5V – 15V
- Hermetic 1 in. × 1 in. × 0.2 in. package
- -40 °C to $+85$ °C
- 1 ppb/g vibration sensitivity

Applications

- Radar:
 - Clock
 - Coherent local oscillator
- Test and measurement systems
- High reliability applications
 - Optional Mil-Prf-38534 screening

Overall Performance

Parameters	Value	Units
Frequency	400	MHz
Supply voltage	4.75 – 15.75	V
Supply current	43	mA
Control voltage	0 – 5	V
Output power	8 – 12	dBm

Functional Block Diagram

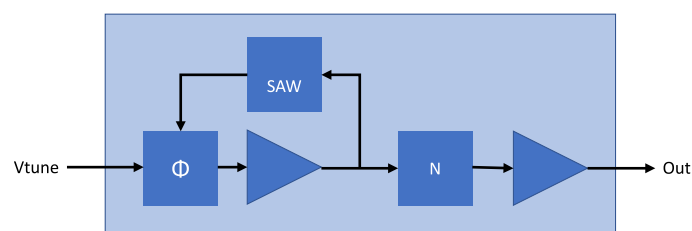


Table of Contents

Product Overview.....	1
1. Electrical Specifications.....	3
1.1. Typical Electrical Performance.....	3
1.2. Typical Performance Curves.....	4
1.3. Absolute Maximum Ratings.....	4
2. Outline Drawing.....	5
2.1. Recommended Land Pattern.....	6
2.2. Test Board.....	7
3. Ordering Information and Handling Recommendations.....	8
3.1. Ordering Information.....	8
3.2. Handling Recommendations.....	8
4. Revision History.....	9
Microchip Information.....	10
The Microchip Website.....	10
Product Change Notification Service.....	10
Customer Support.....	10
Product Identification System.....	11
Microchip Devices Code Protection Feature.....	11
Legal Notice.....	11
Trademarks.....	11
Quality Management System.....	12
Worldwide Sales and Service.....	13

1. Electrical Specifications

1.1 Typical Electrical Performance

Table 1-1. Electrical Specifications at $T_{case} = 25\text{ }^{\circ}\text{C}$, $V_{CC} = 5\text{V}$, unless otherwise specified.

Parameter	Symbol	Min.	Typ.	Max.	Units	Notes
Frequency	f_n		400		MHz	1
Frequency variation over temperature			140		ppm	2
Supply voltage sensitivity			1		ppm	3
Loadpull			5		ppm	4
Frequency aging				30	ppm	5
Vibration sensitivity	Γ		1		ppb/g	
Supply voltage	V_{CC}	4.75	5	15.75	V	6
Supply current	I_{CC}		43		mA	
Control current	I_C		0		mA	
Control voltage	V_C	0	1	5	V	
Tuning range			245		ppm	
Tuning sensitivity	K_V		49		ppm/V	
Linearity			5		%	
Modulation bandwidth	BW		100		kHz	
Output power	P_{out}	8	10.5	12	dBm	7
Output power variation over temperature			1.7		dBm	2
Second harmonic suppression			-40	-35	dBc	
Third harmonic suppression			-63	-55	dBc	
Non-harmonic spurious			-86	-82	dBc	
Phase noise at 100 Hz			-104	-100	dBc/Hz	
Phase noise at 1 kHz			-132	-130	dBc/Hz	
Phase Noise at 10 kHz			-157	-155	dBc/Hz	
Phase noise at 100 kHz			-167	-165	dBc/Hz	
Phase noise at 1 MHz			-176	-174	dBc/Hz	
Phase noise at 10 MHz			-177	-175	dBc/Hz	
Operating case temperature	T_{case}	-40	25	85	$^{\circ}\text{C}$	
Package size			$1 \times 1 \times 0.2$		in^3	
Mass			11		g	

Notes:

- Unit will tune to nominal frequency at end of life under any combination of supply variation, load pull, case temperature, and vibration.
- Over operating case temperature range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$
- Supply voltage variation $\pm 5\%$
- Load variation 2:1 VSWR, any angle
- 20 years
- Adequate heat sinking must be implemented to meet operating case temperature requirements. Recommended operating condition is $V_{CC} = 5\text{V}$.
- Single ended into 50Ω load at 400 MHz

1.2 Typical Performance Curves

The following graphs show the typical performance curves of 101765-400-B.

Figure 1-1. Typical Phase Noise Performance


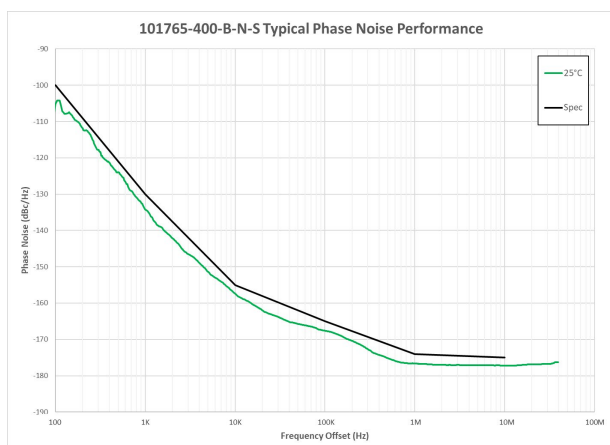


Figure 1-2. Typical Tuning Characteristics

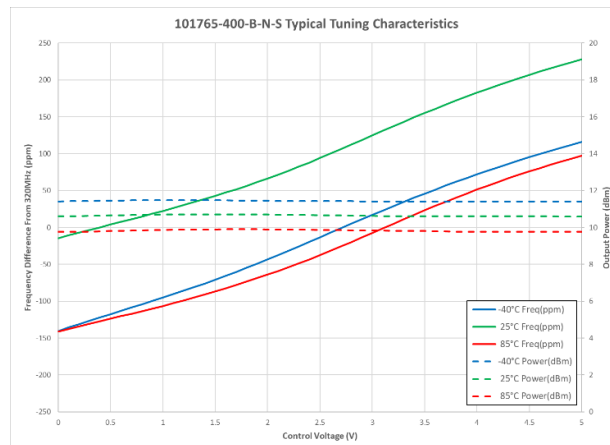

1.3 Absolute Maximum Ratings

Stress exceeding the absolute maximum ratings can permanently damage the device. Also, exposure to these absolute maximum ratings for extended periods may adversely affect device reliability. Functional operation is not implied at these or any other conditions exceeding those represented in the operational sections of this datasheet.

The following table shows the absolute maximum ratings, for T_{case} from -40°C to $+85^{\circ}\text{C}$.

Table 1-2. Absolute Maximum Ratings

Parameters	Symbol	Min	Max	Units
Supply voltage	V_{CC}	-0.3	22	V
Supply current	I_{CC}	N/A	55	mA
Control voltage	V_C	-12	30	V
Operating case temperature	T_{case}	-40	85	$^{\circ}\text{C}$
Storage temperature	T_{stg}	-55	125	$^{\circ}\text{C}$

1.3.1 Reliability

Qualification included MIL-STD -883 tests per MIL-PRF-38534 Table C-Xc, Class K, QML Level, Subgroups 1, 2, 3, and 4. Standard Screening includes pre-seal burn -in, non -destructive bond pull, temperature cycling and seal tests. Mil screening includes tests per MIL-PRF-38534 Table C-IX, Class H. Custom screening is available. Consult factory.

2. Outline Drawing

Figure 2-1. Outline Drawing

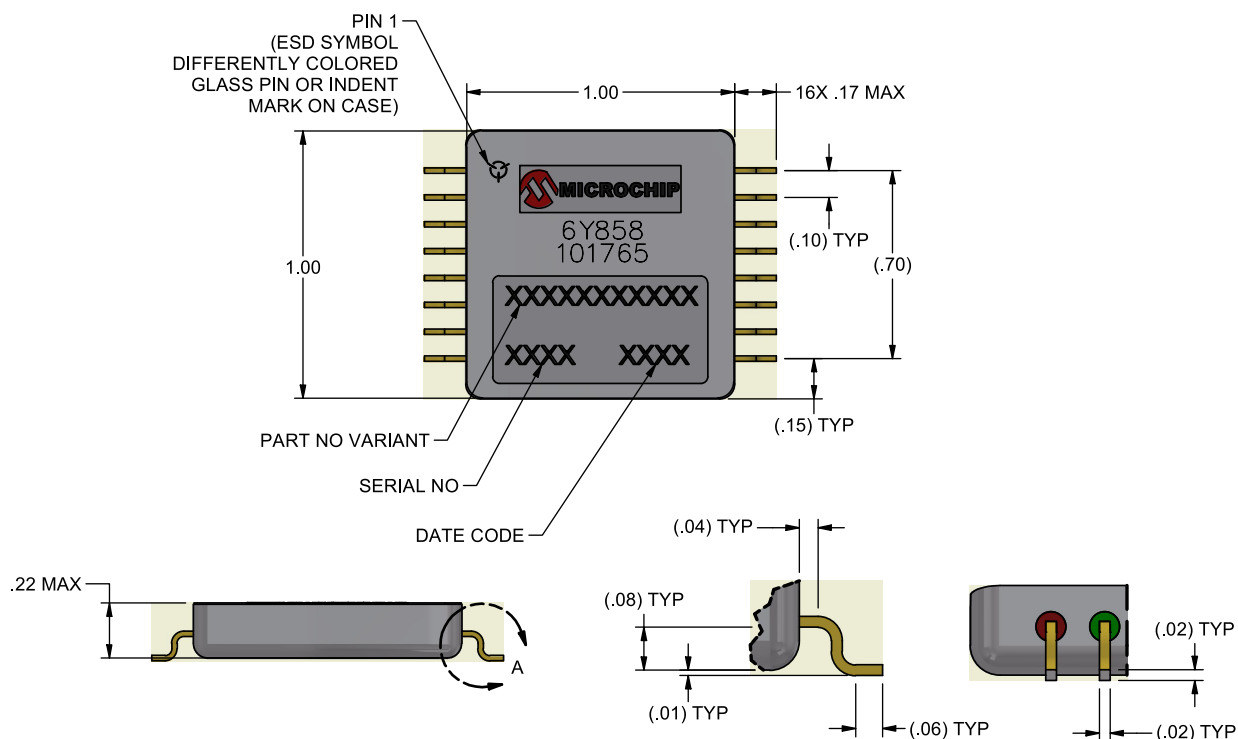


Table 2-1. Pin Outs


Pin No.	Function
1	V_{control}
2	NC
3	GND
4	NC
5	NC
6	NC
7	GND
8	NC
9	OUTPUT
10	GND
11	NC
12	NC
13	NC
14	NC
15	GND
16	V_{CC}

Notes:

1. Microchip recommends grounding NC pins in application.
2. Part marking may be implemented with laser etch and/or printed label at Microchip's discretion.

2.1 Recommended Land Pattern

Figure 2-2. Recommended Land Pattern

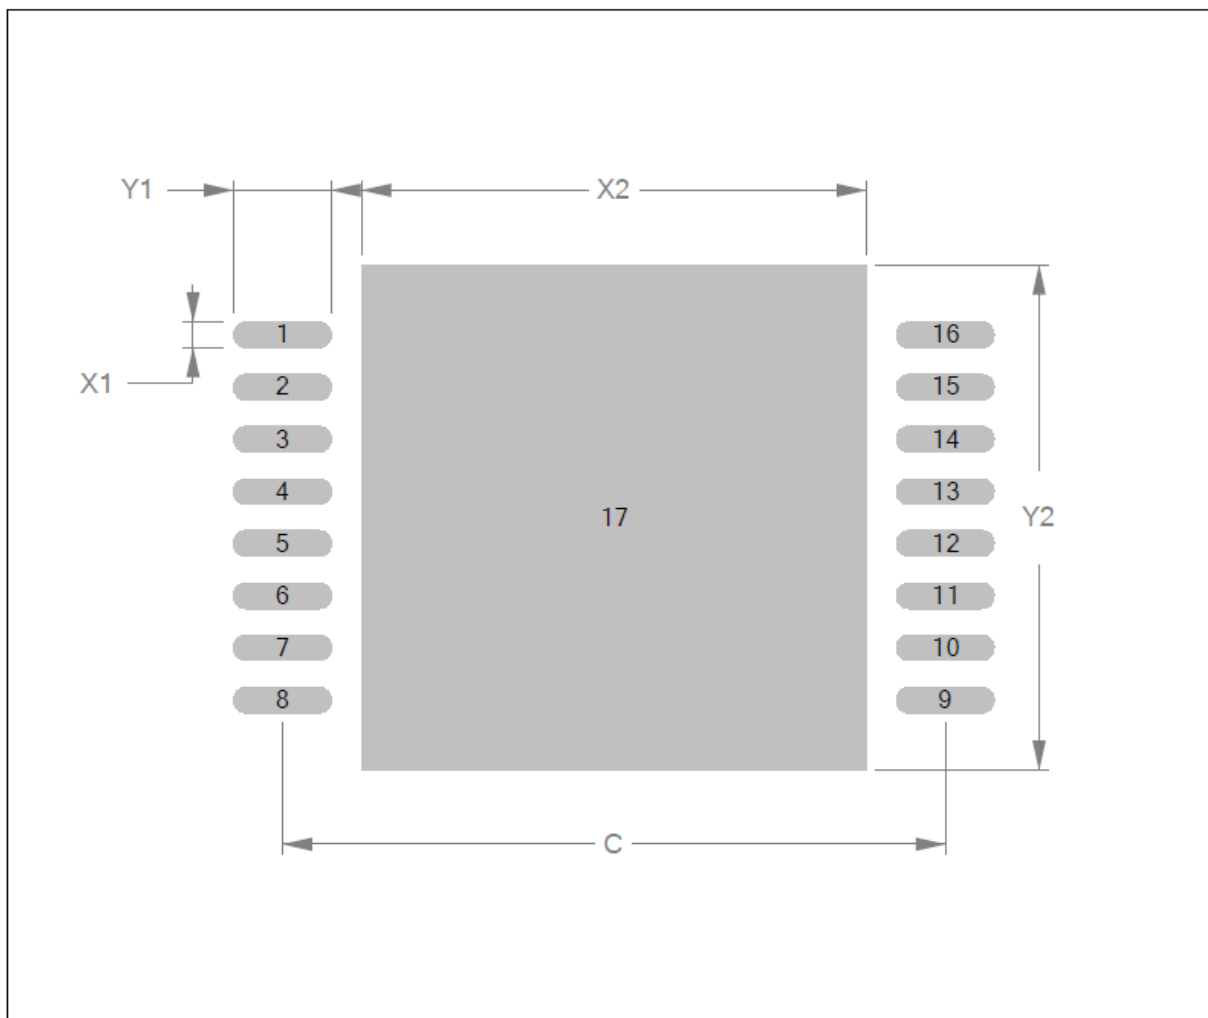


Symbol	Dimension (in.)
C	1.272
Y1	0.187
X1	0.049
Y2	0.969
X2	0.969

Note:

1. Microchip recommends placing an array of vias in the ground plane (17) beneath the device body for RF performance and thermal conduction.

2.2 Test Board

Figure 2-3. Test Board

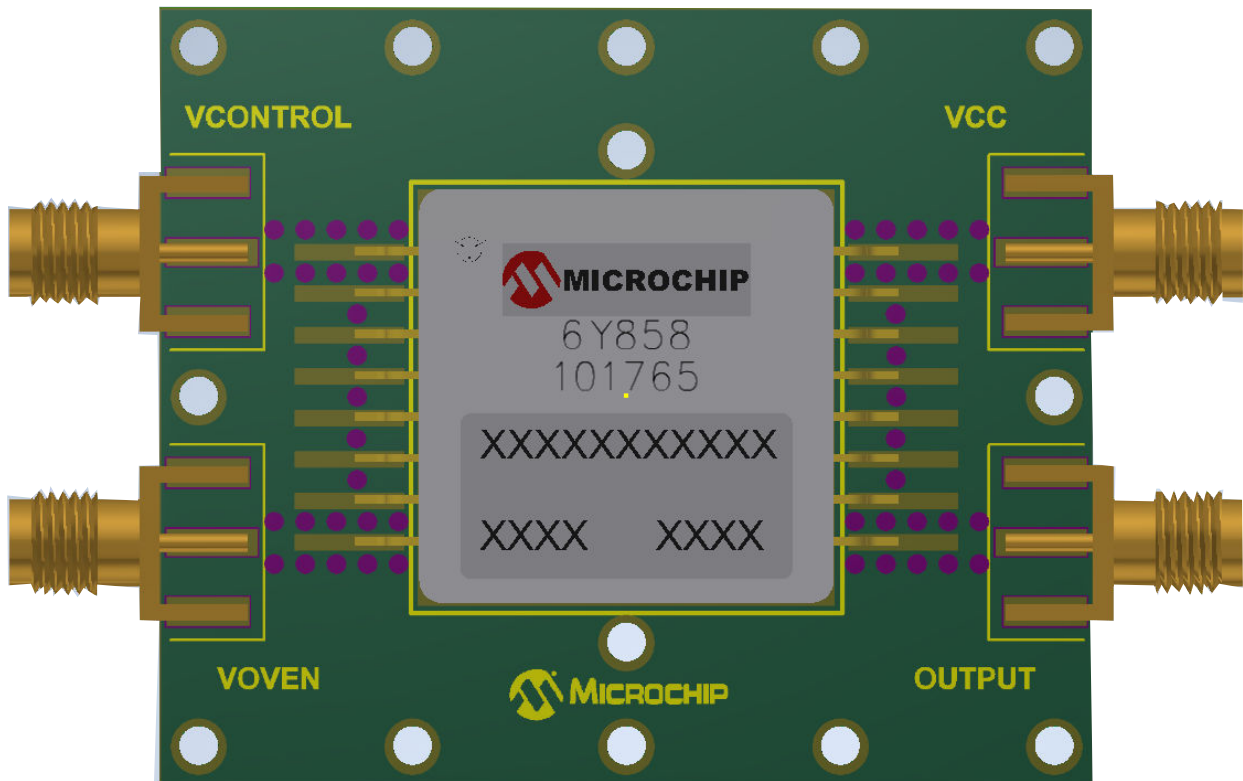


Notes:

1. SMA female connectors
2. PCB material: FR4 or equivalent
3. PCB dimensions: 2.250 in. × 1.875 in. × 0.062 in.
4. When ordering the – TB option, the VCSO is mounted on the test board as recommended in the datasheet.

3. Ordering Information and Handling Recommendations

3.1 Ordering Information

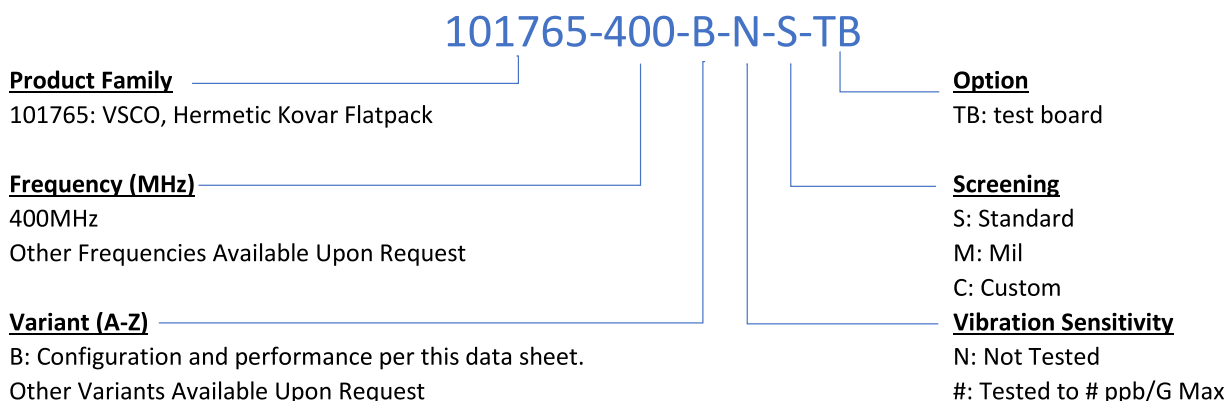

Contact Information

Microchip Technology, Inc. – RF Signal Processing
90 Wolcott Rd.
Simsbury, CT 06070
USA
Tel: +1 (860) 651-0211
<http://www.microchip.com>

3.2 Handling Recommendations

The 101765 family of VCSO are susceptible to electrostatic discharge. Proper precautions should be taken when handling and mounting.

Mounting

Microchip recommends thermally and electrically attaching the body of the 101765 to the substrate ground or chassis on which it is mounted (e.g., with epoxy) and selectively soldering the leads (e.g., with solder iron or hot air pencil). The end user is responsible for implementing a compatible process.



ESD Sensitive Device

4. Revision History

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

Revision	Date	Description
A	09/2024	Document created.

Microchip Information

The Microchip Website

Microchip provides online support via our website at www.microchip.com/. This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

Product Change Notification Service

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to www.microchip.com/pcn and follow the registration instructions.

Customer Support

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: www.microchip.com/support

Product Identification System

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP “AS IS”. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP’S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer’s risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, TimeCesium, TimeHub, TimePictra, TimeProvider, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, EyeOpen, GridTime, IdealBridge, IGaT, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, MarginLink, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mSiC, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, Power MOS IV, Power MOS 7, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, Turing, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2024, Microchip Technology Incorporated and its subsidiaries. All Rights Reserved.

ISBN: 978-1-6683-0216-3

AMBA, Arm, Arm7, Arm7TDMI, Arm9, Arm11, Artisan, big.LITTLE, Cordio, CoreLink, CoreSight, Cortex, DesignStart, DynamIQ, Jazelle, Keil, Mali, Mbed, Mbed Enabled, NEON, POP, RealView, SecurCore, Socrates, Thumb, TrustZone, ULINK, ULINK2, ULINK-ME, ULINK-PLUS, ULINKpro, μ Vision, Versatile are trademarks or registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

Quality Management System

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

AMERICAS	ASIA/PACIFIC	ASIA/PACIFIC	EUROPE
Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: www.microchip.com/support Web Address: www.microchip.com	Australia - Sydney Tel: 61-2-9868-6733 China - Beijing Tel: 86-10-8569-7000 China - Chengdu Tel: 86-28-8665-5511 China - Chongqing Tel: 86-23-8980-9588 China - Dongguan Tel: 86-769-8702-9880 China - Guangzhou Tel: 86-20-8755-8029 China - Hangzhou Tel: 86-571-8792-8115 China - Hong Kong SAR Tel: 852-2943-5100 China - Nanjing Tel: 86-25-8473-2460 China - Qingdao Tel: 86-532-8502-7355 China - Shanghai Tel: 86-21-3326-8000 China - Shenyang Tel: 86-24-2334-2829 China - Shenzhen Tel: 86-755-8864-2200 China - Suzhou Tel: 86-186-6233-1526 China - Wuhan Tel: 86-27-5980-5300 China - Xian Tel: 86-29-8833-7252 China - Xiamen Tel: 86-592-2388138 China - Zhuhai Tel: 86-756-3210040	India - Bangalore Tel: 91-80-3090-4444 India - New Delhi Tel: 91-11-4160-8631 India - Pune Tel: 91-20-4121-0141 Japan - Osaka Tel: 81-6-6152-7160 Japan - Tokyo Tel: 81-3-6880-3770 Korea - Daegu Tel: 82-53-744-4301 Korea - Seoul Tel: 82-2-554-7200 Malaysia - Kuala Lumpur Tel: 60-3-7651-7906 Malaysia - Penang Tel: 60-4-227-8870 Philippines - Manila Tel: 63-2-634-9065 Singapore Tel: 65-6334-8870 Taiwan - Hsin Chu Tel: 886-3-577-8366 Taiwan - Kaohsiung Tel: 886-7-213-7830 Taiwan - Taipei Tel: 886-2-2508-8600 Thailand - Bangkok Tel: 66-2-694-1351 Vietnam - Ho Chi Minh Tel: 84-28-5448-2100	Austria - Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393 Denmark - Copenhagen Tel: 45-4485-5910 Fax: 45-4485-2829 Finland - Espoo Tel: 358-9-4520-820 France - Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79 Germany - Garching Tel: 49-8931-9700 Germany - Haan Tel: 49-2129-3766400 Germany - Heilbronn Tel: 49-7131-72400 Germany - Karlsruhe Tel: 49-721-625370 Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44 Germany - Rosenheim Tel: 49-8031-354-560 Israel - Hod Hasharon Tel: 972-9-775-5100 Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781 Italy - Padova Tel: 39-049-7625286 Netherlands - Drunen Tel: 31-416-690399 Fax: 31-416-690340 Norway - Trondheim Tel: 47-72884388 Poland - Warsaw Tel: 48-22-3325737 Romania - Bucharest Tel: 40-21-407-87-50 Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91 Sweden - Gothenberg Tel: 46-31-704-60-40 Sweden - Stockholm Tel: 46-8-5090-4654 UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820