



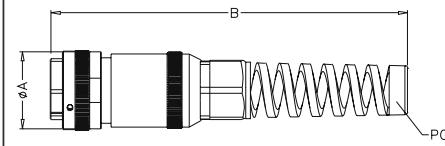
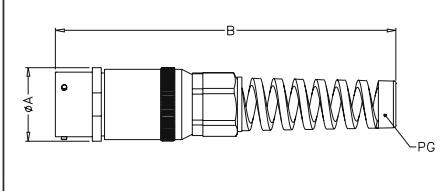
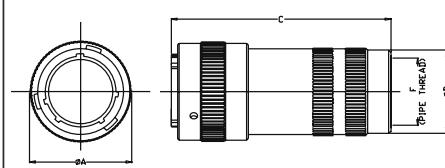
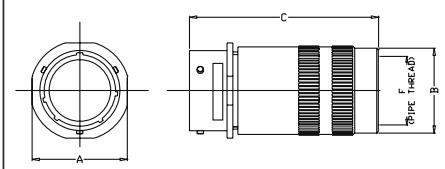
MP-62 / MP-65 Series

Amphenol's Multipin MP-62 series of circular connectors utilise the same design principles as the Mil-C-26482 military connectors. Featuring a three point quick mating bayonet coupling and five key polarisation ensuring a positive connection every time. Available in two contact pin layouts 39 and 61 with gold plated solder contacts fitted as standard.

Features:

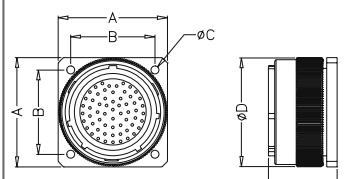
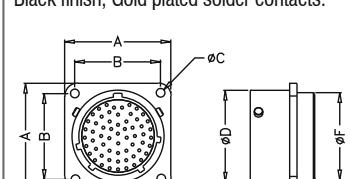
- 39 or 61 pins.
- Environmental resistant.
- Gold plated solder contacts.
- Black finish.
- Neoprene insert.
- Positive bayonet locking.
- Protective dust caps
- PG cable glands
- Metal housings

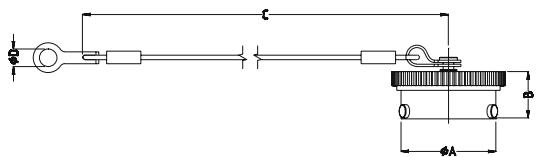
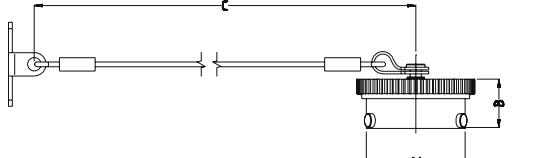
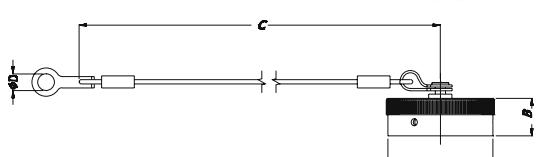
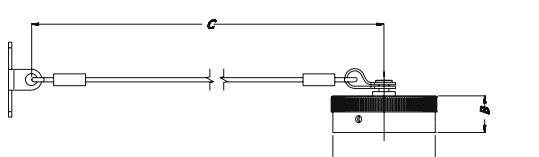
Specifications: Page 131 **Wiring Info: Page 141**

PRODUCT - FIGURE	Dimensions in mm (inches) DRAWING	Dimensions in mm (inches)			PINS	PART NUMBER	PART NUMBER With Dustcap
		A	B	PG			
	<p>Straight cable plug with pin contacts, Black finish, Gold plated solder contacts.</p> 	38.9 (1.53)	181.5 (7.15)	16 39	39	MP-6216-39P	MP-6216-39P-C
		45.5 (1.80)	193 (7.60)	21 61			
	<p>Cable connecting receptacle with socket contacts, Black finish, Gold plated solder contacts.</p> 	36.7 (1.45)	181.5 (7.15)	16 39	39	MP-6211-39S	MP-6211-39S-C
		43.0 (1.70)	193 (7.60)	21 61			
	<p>Straight cable plug with pin contacts, NPT 3/4" threaded backshell, Black finish, Gold plated solder contacts.</p> 	38.9 (1.53)	90 (3.54)	NPT 3/4"	39	MP-6516-39P	MP-6516-39P-C
		45.5 (1.80)	100 (3.94)	NPT 3/4"			
	<p>Cable connecting receptacle with socket contacts, NPT 3/4" threaded backshell, Black finish, Gold plated solder contacts.</p> 	36.7 (1.45)	90 (3.54)	NPT 3/4"	39	MP-6511-39S	MP-6511-39S-C
		43.0 (1.70)	100 (3.94)	NPT 3/4"			

Multipin Connectors

MP-62 / MP-65 Series

PRODUCT - FIGURE	DRAWING Dimensions in mm (inches)	Dimensions in mm (inches)						PINS	PART NUMBER	PART NUMBER With Dustcap
		A	B	C	D	E	F			
	Panel plug with pin contacts, Black finish, Gold plated solder contacts. 	38.86 (1.53)	29.36 (1.16)	6-32 UNC	39.0 (1.54)	32 (1.26)	-	39	MP-6256-39P	MP-6256-39P-C
		43.94 (1.73)	34.93 (1.38)	6-32 UNC	45.5 (1.80)	35 (1.38)	-	61	MP-6256-61P	MP-6256-61P-C
	Panel receptacle plug with socket contacts, Black finish, Gold plated solder contacts. 	36.7 (1.44)	29.36 (1.15)	3.05 (0.12)	31.8 (1.25)	22.3 (0.87)	30.1 (1.18)	39	MP-6212-39S	MP-6212-39S-C
		43.0 (1.69)	34.93 (1.38)	3.74 (0.15)	38.1 (1.50)	22.3 (0.87)	36.4 (1.43)	61	MP-6212-61S	MP-6212-61S-C

PRODUCT - FIGURE	DRAWING Dimensions in mm (inches)	DESCRIPTION	Dimensions in mm (inches)				PINS	PART NUMBER
			A	B	C	D		
	 Plug protective dustcap to suit MP-6256	31.7 (1.25)	15.9 (0.62)	127 (4.99)	4.40 (0.17)	39	MP-742-39S	
		38.05 (1.50)	16.70 (0.66)	127 (4.99)	4.40 (0.17)	61	MP-742-61S	
	 Receptacle protective dustcap to suit MP-6216	36.9 (1.45)	13.13 (0.52)	127 (4.99)	-	39	MP-742-39L	
		43.14 (1.70)	14.15 (0.56)	127 (4.99)	-	61	MP-742-61L	
	 Plug protective dustcap to suit MP-6212	31.7 (1.25)	15.9 (0.62)	127 (4.99)	4.40 (0.17)	39	MP-738-39S	
		38.05 (1.50)	16.70 (0.66)	127 (4.99)	4.40 (0.17)	61	MP-738-61S	
	 Receptacle protective dustcap to suit MP-6211	36.9 (1.45)	13.13 (0.52)	127 (4.99)	-	39	MP-738-39L	
		43.14 (1.70)	14.15 (0.56)	127 (4.99)	-	61	MP-738-61L	

STANDARD DATA MP-62 SERIES / MP - 65 SERIES

		VALUE	
GENERAL CHARACTERISTICS	Number of contacts	39	61
	Number of channels	12	20
	Termination	Solder	
	Wire Gauge - Stranded Wire	37 x 24AWG-20AWG 2 x 20AWG-16AWG	24AWG-20AWG
	Environmental	Complies with EU RoHS 2 Directive 2011/65/EU	
ELECTRICAL CHARACTERISTICS	Operating Voltage at Sea level - DC	600V*	
	Operating Voltage at Sea level - AC	600V*	
	Test Voltage AC RMS	1500V	
	Current Carrying Capacity	37 x 7.5A 2 x 13A	7.5A
	Insulation Resistance	5000MΩ	
CLIMATIC CHARACTERISTICS	Protection Class	IP67 (when mated)	
	Operating Temperature	-55°C to +125°C (-67°F to +257°F)	
MECHANICAL CHARACTERISTICS	Cable Retention	PG Gland / NPT Thread	
	Mechanical Operations	500 mating cycles (minimum)	
MATERIALS	Connector / Shell Finish	Aluminium Alloy / Black	
	Insert	Neoprene	
	Male pin contact machined - Plating	Brass / Gold plated	
	Female socket contact machined - Plating	Brass / Gold plated	
CLAMPING CHARACTERISTICS	PG Gland	16	21
	Cable Clamping range mm (inches)	9-14 (0.35"-0.55")	13-18 (0.51"-0.70")

*Not suitable for domestic applications above 50V

Rev 3 - 03/2013



146 SERIES RECTANGULAR CONNECTORS

Amphenol Tuchel C146 series rectangular connectors feature modular components ensuring a vast range of different features and benefits for the end user. The zinc diecast aluminum housings are finished in a durable powder coat and available in either top or side entry. Connector coupling is achieved via a positive locking lever ensuring a positive rapid connection. The C146 series is suitable for general-purpose audio and lighting applications and is completely intermateable with all competitor connectors.

FIBRE OPTIC

Amphenol has over 25 years experience in fibre optics dating back to their development of the first industry standard connector, the SMA. Today we can offer a complete range of products including Hybrid Fibre optic connectors for HDTV broadcast cameras SMPTE 304M compliant and ruggedised connectors and cable assemblies for indoor or outdoor applications.

PRODUCT SAFETY INFORMATION

This should be read in conjunction with Data Sheet information contained in individual product brochures. Failure to observe the advice in this information sheet and the operating conditions specified in the Data Sheets could result in hazardous situations.

1. Material Content and Physical Form

Electrical connectors do not usually contain hazardous materials. They contain conducting and non-conducting materials. Shells are manufactured in metal and plastic. Insulators can be formed in either natural rubber, synthetic rubber, plastic or glass insulating materials. Contact materials vary with the type of connector and its application. They are usually manufactured from either copper alloys, nickel, alumel, chromel or steel. In special applications, other alloys may be specified.

2. Fire Characteristics and Electric Shock Hazard

There is no fire hazard when the connector is correctly wired and used within the specified parameters. Incorrect wiring or assembly of the connector or careless use of metal tools or conductive fluids, or transit damage to any of the component parts may cause electric shock or burns. Live circuits must not be broken by separating mated connectors as this may cause arcing, ionisation and burning. Heat dissipation is greater at maximum resistance in a circuit. Hot spots may occur when resistance is raised locally by damage, e.g. cracked or deformed contacts, or broken strands of wire. Local overheating may also result from the use of the incorrect application tools or from poor quality soldering.

Overheating may occur if the ratings in the Data Sheets are exceeded and can cause breakdown of insulation and hence electric shock.

If heating is allowed to continue it intensifies by further increasing the local resistance through loss of temper or spring contact, formation of oxide film on contacts and wires, and leakage currents through carbonisation of insulation and tracking points. Fire can then result in the presence of combustible materials and this may release noxious fumes. Overheating may not be visually apparent. Burns may result from touching overheated components.

3. Handling

Care must be taken to avoid damage to any component parts of electrical connectors during installation and use. Although there are normally no sharp edges, care must be taken when handling certain components to avoid injury to fingers. Electrical connectors may be damaged in transit to customers, and damage may result in creation of hazards. Products should therefore be examined prior to installation/use and rejected if found to be damaged.

4. Disposal

Incineration of certain materials may release noxious or even toxic fumes.

5. Application

Connectors with exposed contacts should not be selected for use on the current supply side of an electrical circuit, because an electric shock could result from touching exposed contacts of an unmated connector. Voltages in excess of 30 V.A.C. or 42.5

V.D.C. are potentially hazardous and care should be taken to ensure that such voltages cannot be transmitted in any way to exposed metal parts of the connector body. The connector and wiring should be checked, before making live, to have no damage to metal parts or insulators, no solder blobs, loose strands, conducting lubricants, swarf, or any other undesired conducting particles. Circuit resistance and continuity check should be made to make certain that there are no low resistance joints or spurious conducting paths. Always use the correct application tools as specified in the Data Sheets. Do not permit untrained personnel to wire, assemble or tamper with connectors. For operation voltage please see appropriate national regulations.

Important General Information

A) Air and creepage paths / Operating voltage.

The admissible operating voltages depend on the individual applications and the valid national and other applicable safety regulations. For this reason the air and creepage path data are only reference values. Observe reduction of air and creepage paths due to PC board and/or harnessing.

B) Other important information

Amphenol Australia Pty Ltd continuously endeavours to improve its products. Therefore, products may deviate from the description, technical data and shape as shown in product brochures.

C) Assembly instructions

If applicable, special assembly instructions have been included in or on the connector packaging. See also separate instructions in product brochures.

DISTRIBUTED BY

International Headquarters

Amphenol Australia Pty Ltd

22 Industry Blvd.
Carrum Downs VIC 3201 Australia
Phone: +61 3 8796 8888
Fax: +61 3 8796 8801
Email: info@amphenol.com.au

Europe

Amphenol Audio Representative Office

August-Haeusser – Str. 10
74080 Heilbronn Germany
Phone: +49 71 31 9 29 0
Fax: +49 71 31 9 29 486
Email: industrial@amphenol.de

North America

Amphenol Audio Representative Office

44724 Morley Drive
Clinton Township, MI, USA 48036
Phone: +1 800 394 7732
Direct: +1 586 913 8650
Email: sales@amphenolaudio.com

Asia Pacific

Amphenol Australia (China Operations)

3rd floor, Building 9 Shan Cheng Industrial Zone,
Zhou Shi Road, Shi Yan Street, Bao An District,
Shen Zhen, China 518108
Phone: (+86) 755 8173 8000
Fax: (+86) 755 8173 8180
Email: apcd@amphenol.com.au

www.amphenolaudio.com.au

© 2018 Amphenol Australia Pty Ltd

Subject to all applicable laws and regulations Amphenol Australia Pty Ltd reserves the right to change specifications of any product, system or service contained in this brochure without liability.

01/02/2018

Catalogue Part Number: CAT-AUDIO-01