





GRF2013 (1200 - 1500 MHz)


GRF2013 Schematic:

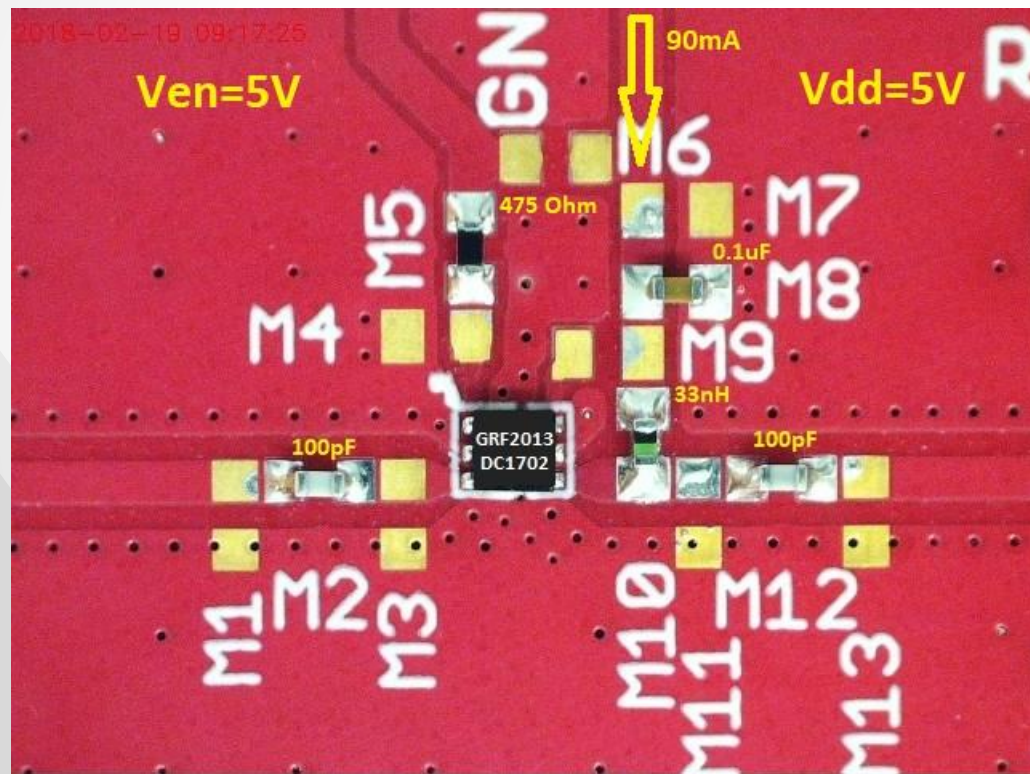

GRF2013 Response:

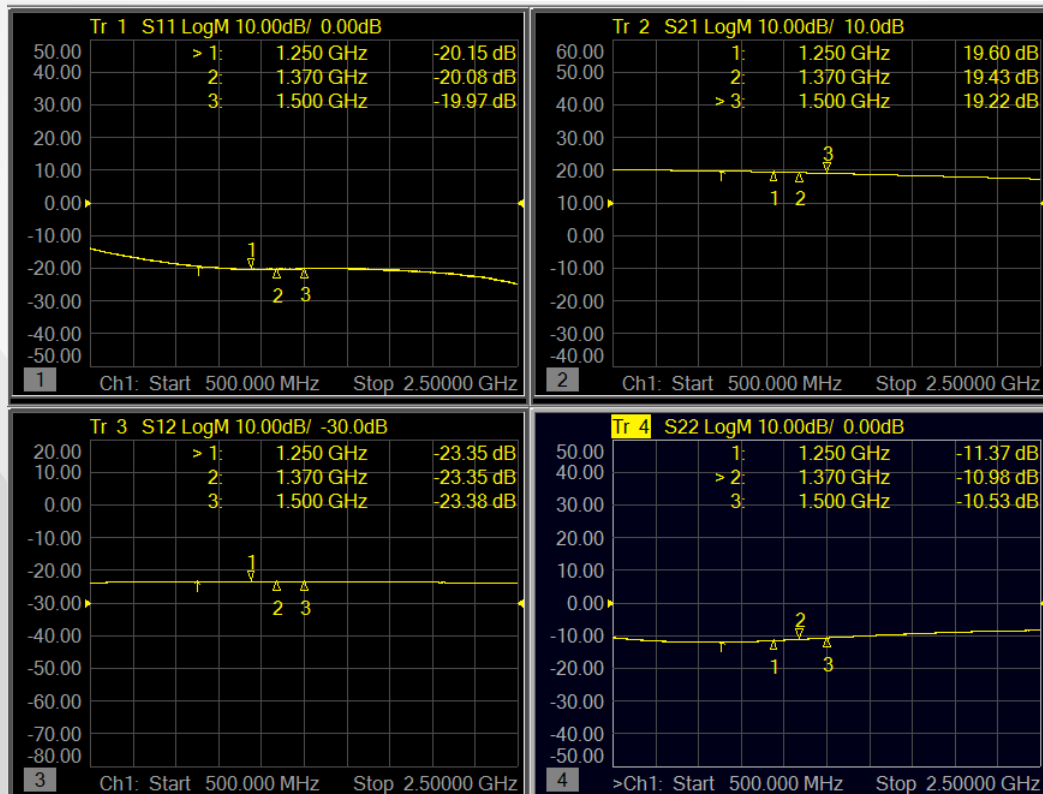

GRF2013 Stability Mu Factor:

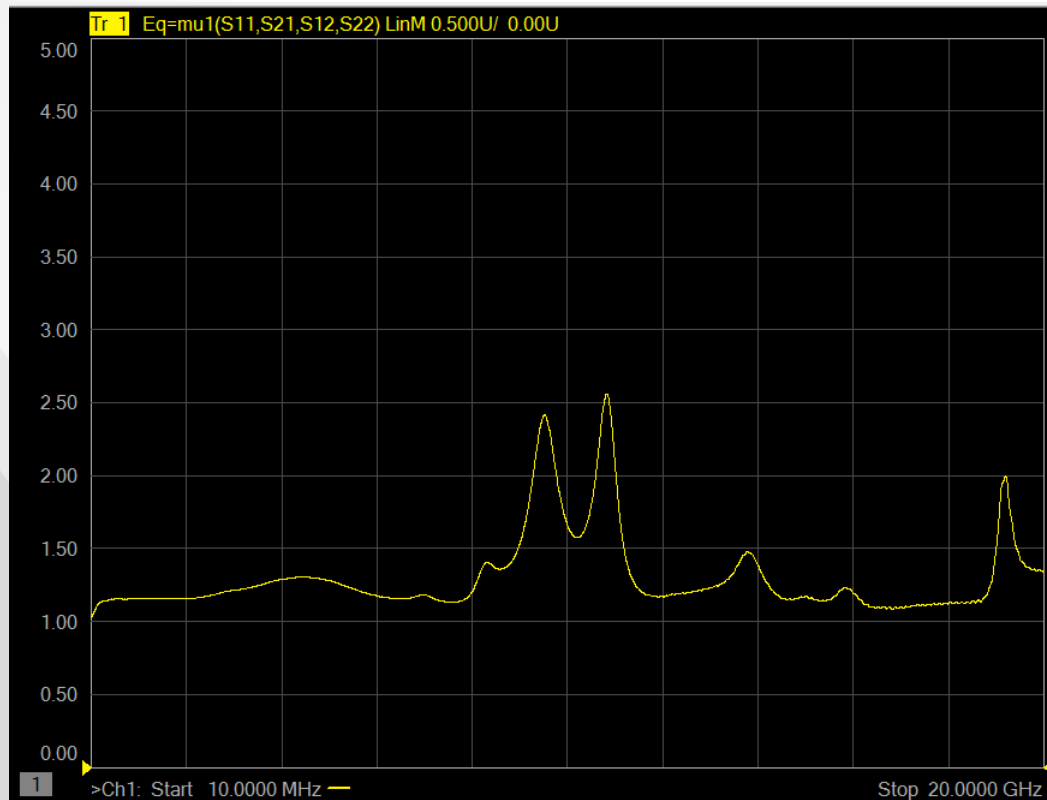

GRF2013 Data:

Descriptor	Freq MHz	Vdd	Iddq mA	Ven	Gain dB	IIP3 dBm	OIP3 dBm	IP1dB dBm	OP1dB dBm	EVB NF
GRF2013 #226	1250	5	90.4	5	19.5816	20.4554	40.037	5	23.17	1.26
GRF2013 #226	1370	5	90.4	5	19.4703	20.5537	40.024	5	23.132	1.22
GRF2013 #226	1500	5	90.4	5	19.2957	19.51185	38.8075	5	23.047	1.22



Jeff Broxson

Vice President - Sales

Phone (336) 339-9314

jbroxson@guerrilla-rf.com

Alan Ake

Vice President - Applications/Technical Marketing

Phone (336) 708-4581

aake@guerrilla-rf.com

Guerrilla RF

1196 Pleasant Ridge Road, Suite 5
Greensboro, NC 27409

Phone: (336) 510-7840

www.guerrilla-rf.com