





GRF2013 (6000 - 7000 MHz)


GRF2013 Schematic:

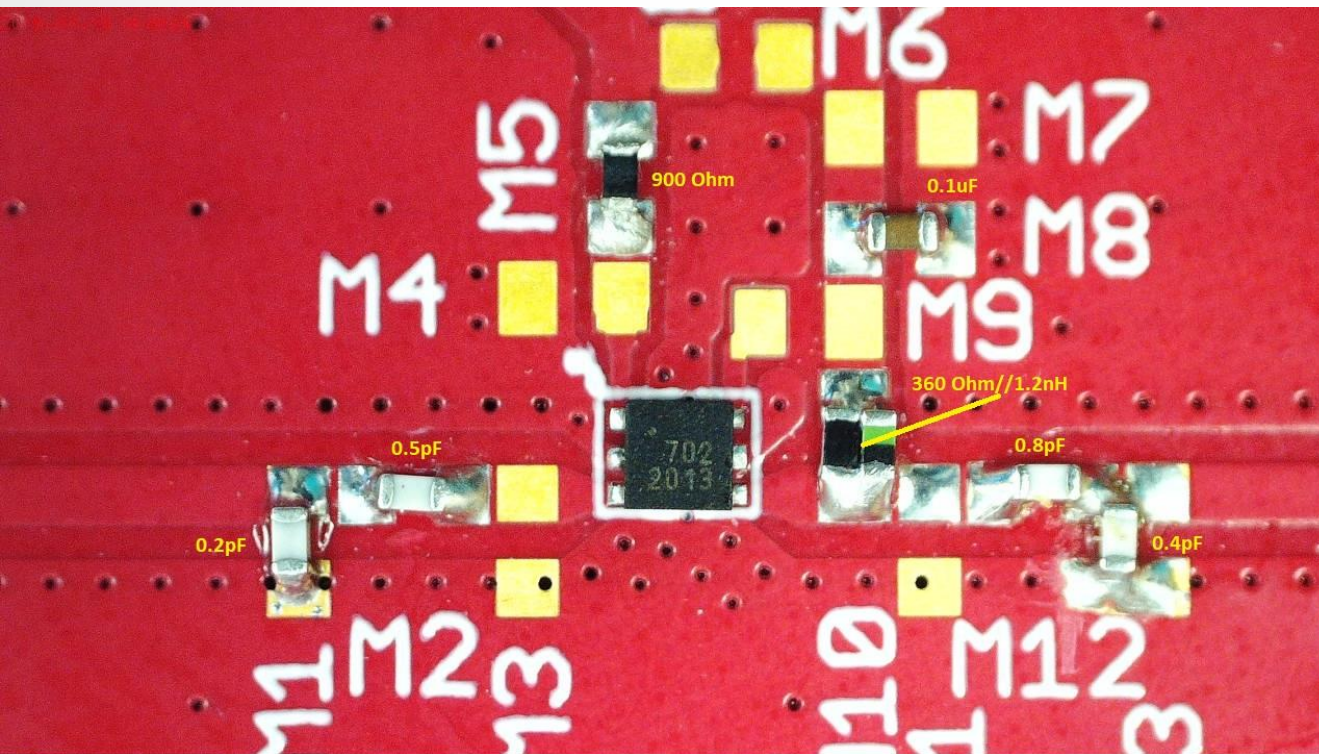

GRF2013 Response:

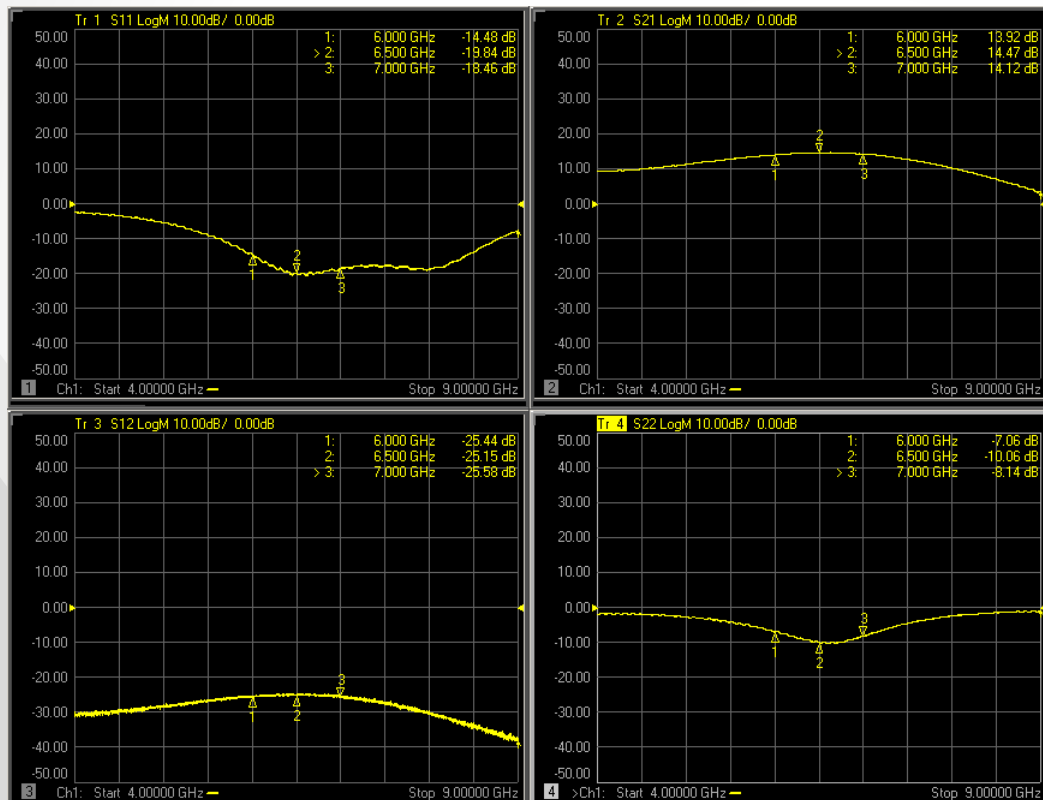

GRF2013 Stability Mu Factor:

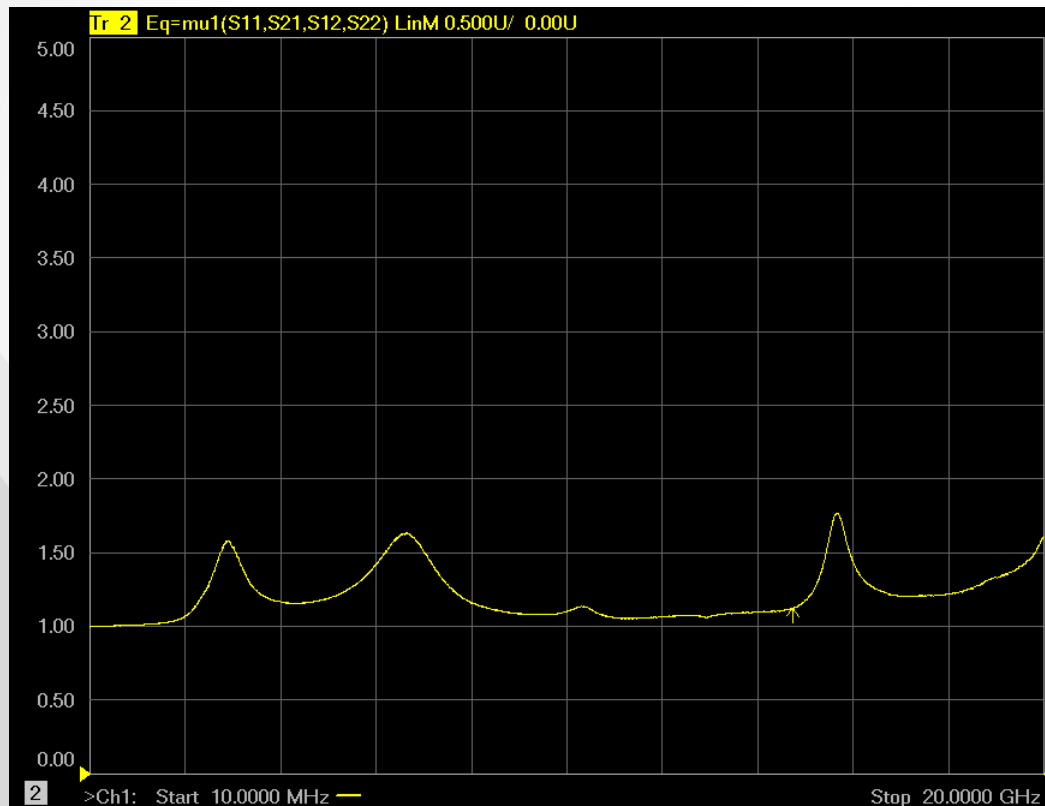

GRF2013 Data:

Descriptor	Freq MHz	Vdd	Iddq mA	Ven	Gain dB	IIP3 dBm	OIP3 dBm	IP1dB dBm	OP1dB dBm	NF
GRF2013 #241	6000	5	90.8	5	14.29	16.01	30.3	7.31	20.6	1.82
GRF2013 #241	6500	5	90.8	5	14.91	13.99	28.9	5.69	19.6	1.96
GRF2013 #241	7000	5	90.8	5	14.64	14.26	28.9	4.66	18.3	2.05



Jeff Broxson

Vice President - Sales

Phone (336) 339-9314

jbroxson@guerrilla-rf.com

Alan Ake

Vice President - Applications/Technical Marketing

Phone (336) 708-4581

aake@guerrilla-rf.com

Guerrilla RF

1196 Pleasant Ridge Road, Suite 5
Greensboro, NC 27409

Phone: (336) 510-7840

www.guerrilla-rf.com