





GRF2051 (700 - 960 MHz)


GRF2051 Schematic:

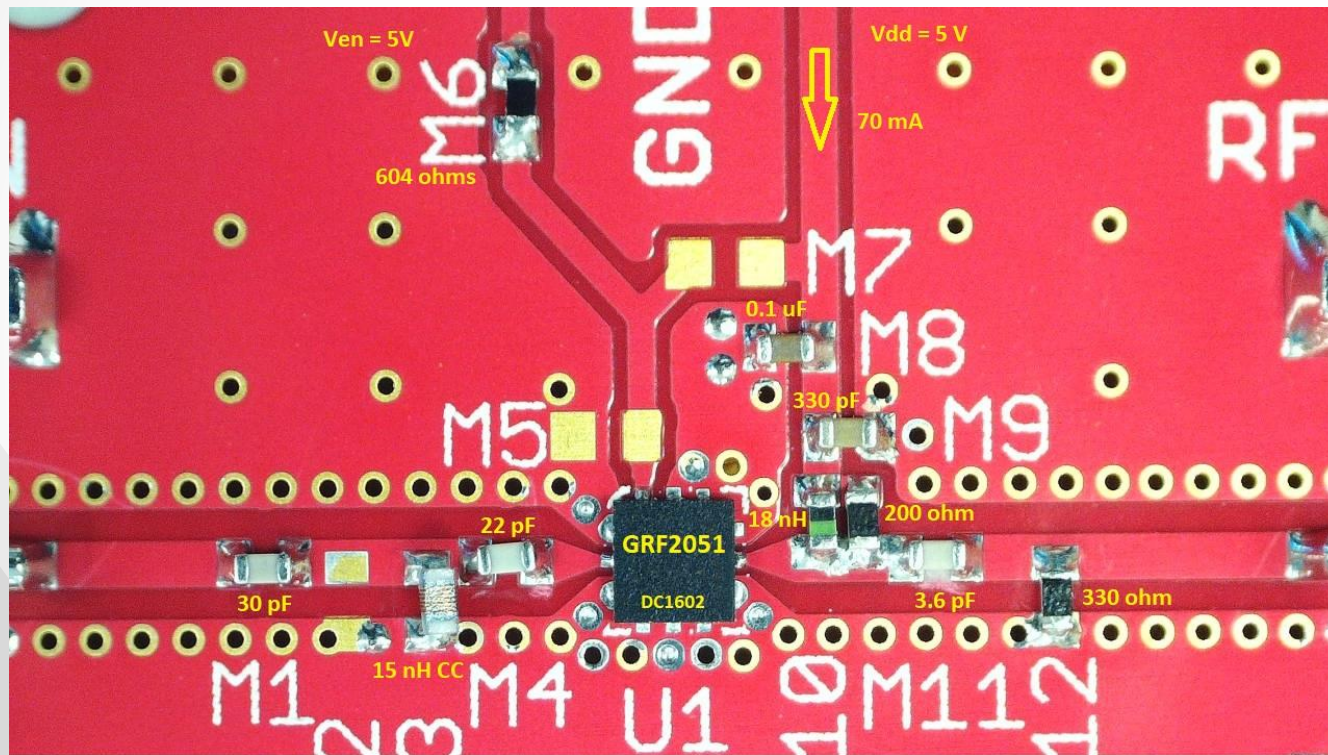

GRF2051 Response:

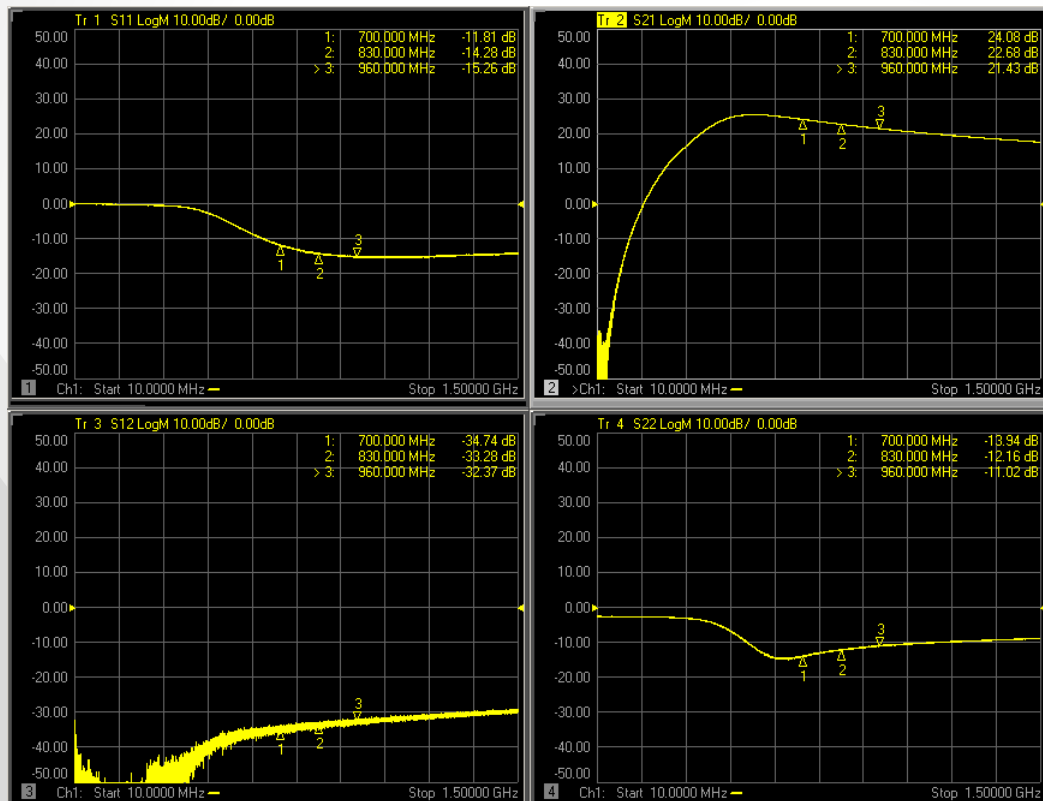

GRF2051 Stability Mu Factor:

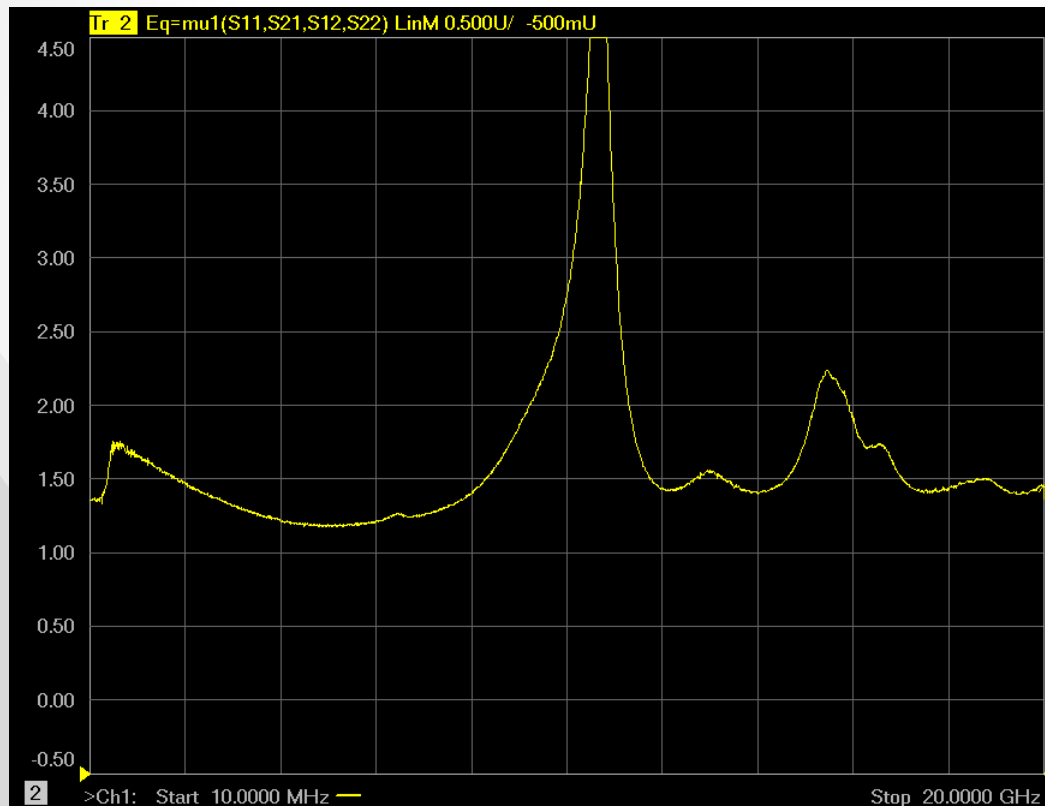

GRF2051 Data:

Descriptor	Freq MHz	Vdd	Iddq mA	Ven	Ien mA	Pout/Ptone dBm	Gain dB	IIP3 dBm	OIP3 dBm	IP1dB dBm	OP1dB dBm	NF
GRF2051 #213	700	5.0	73.5	5.0	4.8	4.0	24.3	8.6	32.9	-5.6	17.6	0.48
GRF2051 #213	830	5.0	73.5	5.0	4.9	4.0	22.8	11.1	33.9	-3.7	18.1	0.38
GRF2051 #213	960	5.0	73.5	5.0	5.0	4.0	21.5	13.2	34.7	-2.0	18.4	0.26



Jeff Broxson

Vice President - Sales

Phone (336) 339-9314

jbroxson@guerrilla-rf.com

Alan Ake

Vice President - Applications/Technical Marketing

Phone (336) 708-4581

aake@guerrilla-rf.com

Guerrilla RF

1196 Pleasant Ridge Road, Suite 5
Greensboro, NC 27409

Phone: (336) 510-7840

www.guerrilla-rf.com