


NINA-B1 series

Stand-alone Bluetooth 5 low energy modules with NFC



10.0 × 10.6 × 2.2 mm

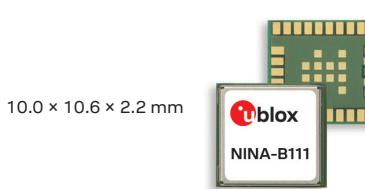

10.0 × 14.0 × 3.8 mm

NINA-B111 NINA-B112

	NINA-B111	NINA-B112
Grade		
Automotive		
Professional	•	•
Standard		
Radio		
Chip inside	nRF52832	
Bluetooth qualification	v5.0	v5.0
Bluetooth low energy	•	•
Bluetooth output power EIRP [dBm]	7	6
Max range [meters]	350	300
NFC	•	•
Antenna type (see footnotes)	pin	metal
Application software		
u-connectXpress	•	•
Open CPU for embedded applications	•	•
Interfaces		
UART	1	1
SPI	◆	◆
I ² C	◆	◆
I ² S	◆	◆
PDM and PWM	◆	◆
GPIO pins	7	19
AD converters [number of bits]	12	12
Features		
AT command interface	•	•
MCU (see footnotes)	M4F	M4F
RAM [kB]	64	64
Flash [kB]	512	512
Simultaneous GATT server and client	•	•
Low Energy Serial Port Service	•	•
Throughput [Mbit/s]	0.8	1.4
Maximum Bluetooth connections	7	20
Bluetooth mesh	◆	◆
FOTA	◆	◆

pin = Antenna pin

metal = Internal metal PIFA antenna

◆ = Feature enabled by HW. The actual support depends on the open CPU application SW.
M4F = 64 MHz Arm® Cortex-M4 with FPU

Features

Bluetooth	v5.0 (Bluetooth low energy)
NFC	NFC-A tag support
Range	NINA-B111: 350 m, antenna pin reference design with 1/2 wave antenna NINA-B112: 300 m, internal antenna
Max. conducted output power	4 dBm
Max. radiated output power (EIRP)	7 dBm with approved antennas
Receiver sensitivity	NINA-B111: -95 dBm Conducted (-98 dBm with approved antennas) NINA-B112: -97 dBm

u-connectXpress software

This section describes the NINA-B1 features when used with the embedded u-connectXpress software. All NINA-B1 modules are delivered with this software and the module is configured using AT commands.

Software features	u-blox Low Energy Serial Port Service (SPS); GATT server and client via AT commands; Configuration over air; Extended Data Mode (EDM) protocol for simultaneous AT commands and data, and multiple simultaneous data streams; beacons; NFC tag for pairing and data
HW interfaces	UART, 7 x GPIO pins
Configuration	AT Commands
Support tools	s-center
Operating modes	Central role (7 simultaneous links) Peripheral role (6 simultaneous links) Simultaneous central and peripheral roles (7 in total, whereof max 4 as peripheral and max 6 as central) LE 1M PHY LE 2M PHY Advertising Extensions LE Data Length Extension
Security	Secure Simple Pairing 128-bit AES encryption LE secure connections
Throughput	780 kbps

Open CPU for customer application

Customers can develop and embed their own application on top of the Bluetooth stack and software inside the NINA-B1 module (open CPU concept). This section describes features specific to using NINA-B1 with an open CPU. Many software features are already available via Arm Mbed or Nordic SDK environment, and more are added continuously.

Development environment	Nordic SDK (including Bluetooth Mesh HomeKit, AirFuel, IoT); Arm Mbed 5; Wirepas connectivity software (for large scale mesh networking)	
HW interfaces*	NFC tag for pairing 3 x SPI 19 x GPIO pins 8 x ADC channels 12 x PWM	UART 2 x I2C I2S PDM QDEC
Security	Secure Simple Pairing 128-bit AES encryption LE secure connections	

Further information

For contact information, see www.u-blox.com/contact-us.

For more product details and ordering information, see the product data sheet.

Package

Dimensions	NINA-B111: 10.0 x 10.6 x 2.2 mm NINA-B112: 10.0 x 14.0 x 3.8 mm
Weight	< 1.0 g

Environmental data, quality & reliability

Operating temperature	-40 °C to +85 °C
Storage temperature	-40 °C to +85 °C
Humidity	RH 5-90% non-condensing

Electrical data

Power supply	1.7 V to 3.6 VDC
Power consumption	Active TX @ 0 dBm: 5.3 mA Standby: 2.2 µA Sleep: 300 nA (with wake-up on external event)

Certifications and approvals

Type approvals	Europe (ETSI RED); US (FCC/CFR 47 part 15 unlicensed modular transmitter approval); Australia (ACMA); New Zealand; Brazil (Anatel); Canada (IC RSS); Japan (MIC - formerly TELEC); South Africa (ICASA); South Korea (KCC); Taiwan (NCC)
Health and safety	EN 62479, EN 60950-1, IEC 60950-1
Medical Electrical Equipment	EN 60601-1-2
Bluetooth qualification	v5.0 (Bluetooth low energy)

Support products

The evaluation kits include a NINA-B1 module on an evaluation board with built-in debugging capabilities. To be used with Nordic SDK or Arm Mbed as a development kit or with s-center to evaluate the u-connectXpress software. A blueprint is available on request, which includes a NINA-B1 module, a sensor, LEDs, buttons, and the source code for NINA-B1 and smart phones.

EVK-NINA-B111	Evaluation kit for NINA-B111 module with antenna pin and external antenna
EVK-NINA-B112	Evaluation kit for NINA-B112 module with internal antenna

Product variants

NINA-B111	With antenna pin
NINA-B112	With internal antenna

Modules are shipped with the u-connectXpress software and can be re-flashed with customer application (open CPU).

Legal Notice:

u-blox reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of u-blox is strictly prohibited.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit www.u-blox.com.

Copyright © 2020, u-blox AG