


Modular Jack Connectors for High Speed LAN Transmission

TM21R Series

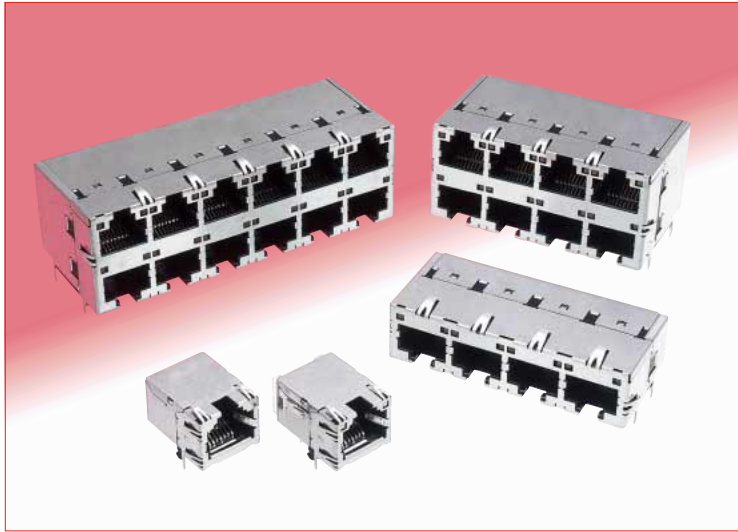

■ Features

1. Supports High Speed LAN Transmission

Complies with TIA/EIA-568-B data wiring requirements, guaranteeing Cat.5e transmission for the single port configuration and Cat.5 transmission performance for the multi-port configuration.

As such, these products fully support Gigabit Ethernet (1000BASE-T) and Fast Ethernet (100BASE-TX) high speed LAN transmission.

2. Built-in Light Indicators

There is no need to design a separate space for the light indicators as they are built-in the connector, enabling space-saving. (Fig.1)

Compared with LED type indicators, they do not emit any electrical noise. (Fig.2)

3. EMI protection

Metal shield covers the outer surfaces of the connectors assuring complete protection against electromagnetic interference.

4. FCC Standards

Meets requirements of FCC Title 47, Part 68, Subpart F.



5. THR (Through-Hole Mounting) Type

THR (Through-Hole Mounting) compatible type is available.

■ Applications


LAN Equipment, Office Equipment and Measuring Devices.

Built-in Light Indicators

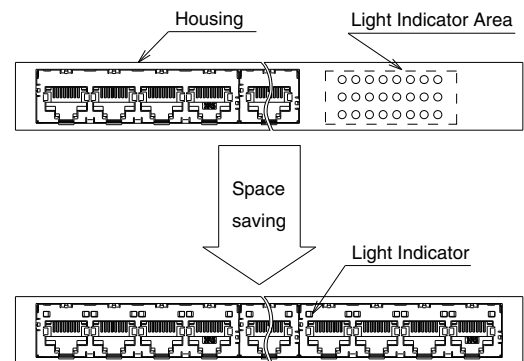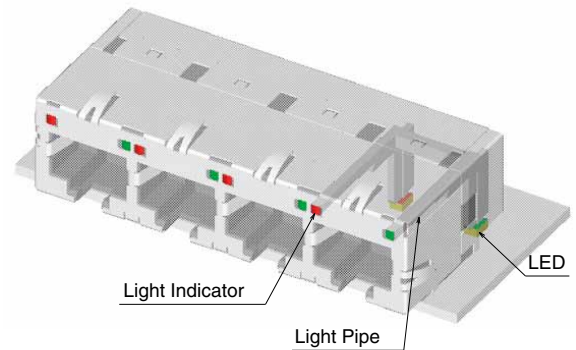

One additional TM21 multi-port jack can be mounted in the space previously occupied by LEDs.

Fig.1

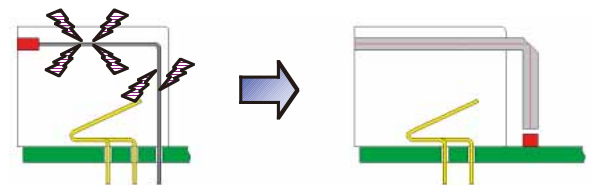

Built-in LED Type
(Easily affected by
noise.)

Built-in Light Pipe Type
(Not affected by noise.)

Fig.2

■Product Specifications

Ratings	Rated Current 1A	Operating Temperature : -55 to +85°C (Note)
	Rated Voltage 125V AC	Storage Temperature Range : -25 to +60°C

Item	Specification	Conditions
1.Insulation Resistance	100MΩ min	100V DC
2.Withstanding Voltage (Between Adjacent Contacts)	No flashover or insulation breakdown	500V AC for 1min.
3.Withstanding Voltage (Between Contact and Shield)	No flashover or insulation breakdown	1500V AC for 1min.
4.Contact Resistance	230mΩ max.	100mA DC
5.Vibration	No electrical discontinuity of 5 μs or more Contact resistance : 250mΩ max.	Frequency : 10 to 55 Hz, single amplitude of 0.75mm, 2 hours / 3 axis
6.Shock	No electrical discontinuity of 5 μs or more Contact resistance : 250mΩ max.	Acceleration of 490 m/s ² , 11 ms duration, sine half-wave waveform, 3 cycles in each of the 3 axis
7.Mating Durability	Contact resistance : 250mΩ max.	200 cycles
8.Temperature Cycle	Contact resistance : 250mΩ max. Insulation resistance : 100MΩ min.	(Temperature : -55°C→+5°C to +35°C→+85°C→+5°C to +35°C Duration : 30 → 5 → 30 → 5 (Minutes) 5 cycles
9.Humidity	Contact resistance : 250mΩ max. Insulation resistance : 1MΩ min. (High humidity) Insulation resistance : 10MΩ min. (Dry state)	500 hours at temperature of 40°C and humidity of 90% to 95%
10.Salt Spray	Contact resistance : 250mΩ max.	Exposed to density 5% salt water for 48 hours

Note : Includes temperature rise caused by current flow.

■Materials / Finish

Part	Material	Finish	Remarks
Insulator	Synthetic Resin	Color : Black	UL94V-0
Contact	Copper Alloy	Contact Area : Gold Plating 1.27 μ Termination Area : Gold Plating	—
Light Pipe	Polycarbonate	Color : Clear	—
Shield	Copper Alloy	Tin Plating	—

■Product Number Structure

Refer to the chart below when determining the product specifications from the product number.
Please select from the product numbers listed in this catalog when placing orders.

●Jacks

TM21 R - 5 A - 32 32 D - LP (50)

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


① Series Name	TM21
② Connector Type	R : Jack
③ Jack Type Number	5 : Right Angle PCB Through-Hole Type
④ Jack Performance Level Code	A : Cat.5 (Single row, multi-port) B : Cat.5 (Double row, multi port) C : Supports Cat.5e (Single port)
⑤ Jack Mating Port Size	8 : 8 contacts 32 : 8 contacts /4 ports 48 : 8 contact/6 ports
⑥ Number of Contacts	8 : 8 contacts 32 : 8 contacts inserted in 4 ports=32 contacts 48 : 8 contacts inserted in 6 ports=48 contacts
⑦ Number of Rows	Blank : Single row D : Double row
⑧ Option	LP : With light pipe inserted Blank : Without light pipe DIR : THR (Through-Hole Mounting)
⑨ RoHS Compliant	(50)

■ Modular Jack Connectors Supporting Cat.5e


● Single Port With Built-in Light Pipe




Part No.	HRS No.	RoHS
TM21R-5C-88-LP(50)	222-2892-0 50	YES

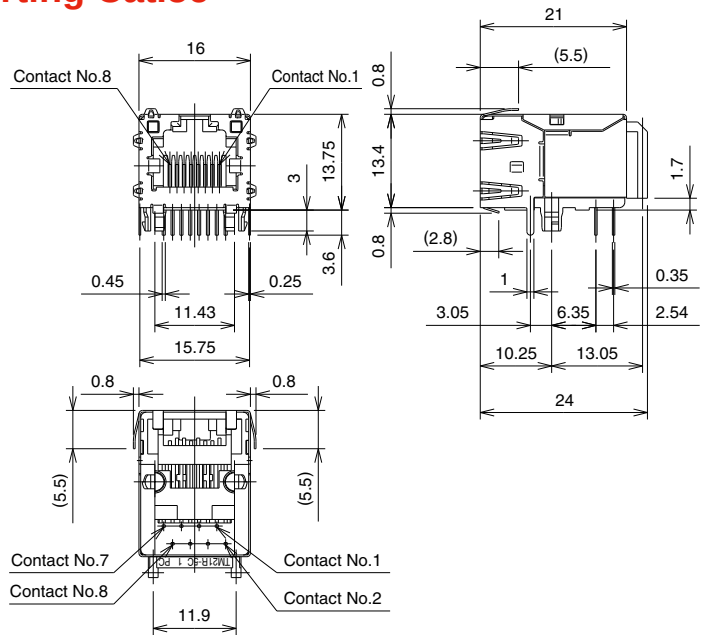

● Single Port Without Light Pipe

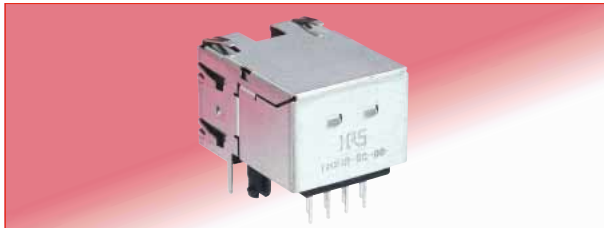


Part No.	HRS No.	RoHS
TM21R-5C-88(50)	222-2893-2 50	YES

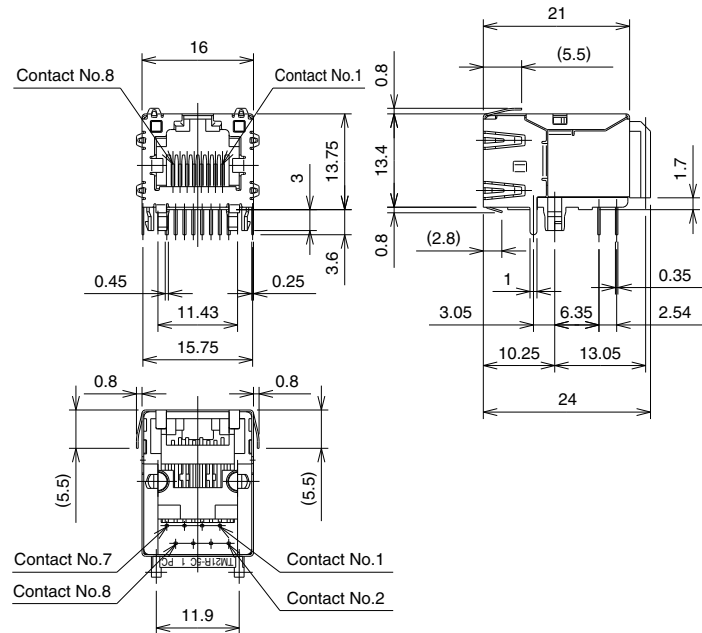

● Single Port (Through-Hole Mounting Type)



Part No.	HRS No.	RoHS
TM21R-5C-88-DIR	222-2091-0 00	YES

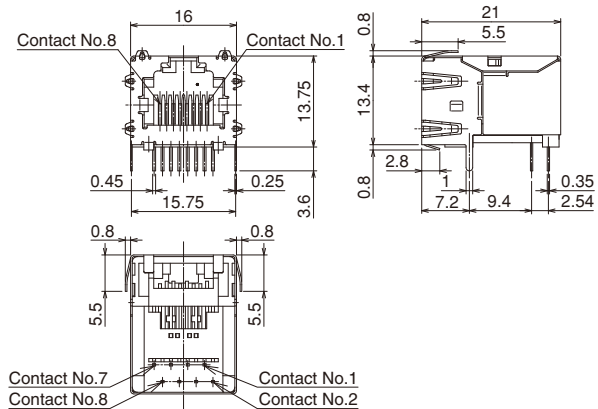

●Through-Hole Mounting Type

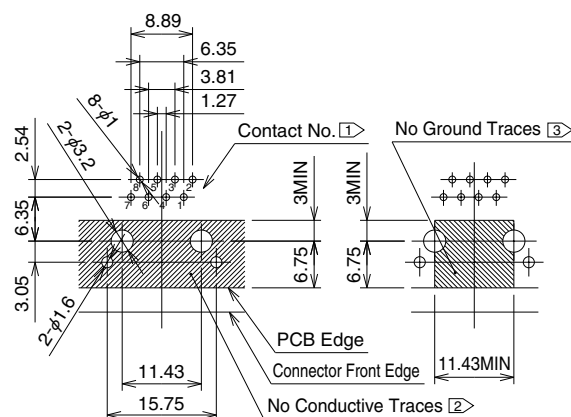


Diagram illustrating the LED Light Emitting Center dimensions. The center is defined by a square area with a side length of 3.2MAX . The horizontal distance from the left edge of the square to the center is 2.7MAX . The vertical distance from the bottom edge of the square to the center is 3.2MAX . The distance from the center to the right edge of the square is 1.5MAX .


Technical drawing of the TM21P-88P connector assembly. The drawing shows a side view of the connector with the following dimensions and labels:

- TM21P-88P**: Label for the main connector body.
- Lock Lever**: Label for the lever mechanism.
- TM21R-5C-88-LP**: Label for the mating connector.
- ③ Connector Front Surface**: Label for the front surface of the connector.
- (33)**: Dimension for the overall length of the connector body.
- 4.5⁺¹₋₂ ③**: Dimension for the distance from the end of the connector body to the front surface of the connector.
- ③ > 2.8⁰_{-0.8}**: Dimension for the distance from the front surface of the connector to the front surface of the mating connector.
- 6.75**: Dimension for the distance from the front surface of the mating connector to the front surface of the connector body.
- 10.25**: Dimension for the distance from the front surface of the connector body to the front surface of the mating connector.


4

■Modular Receptacles Supporting Cat.5

●1 Row×4 Ports

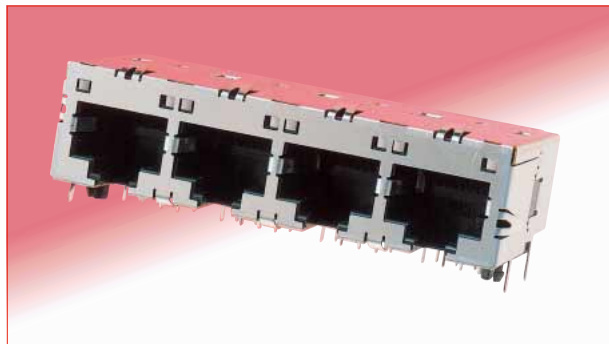


Part No.	HRS No.	RoHS
TM21R-5A-3232-LP(50)	222-2873-50	YES

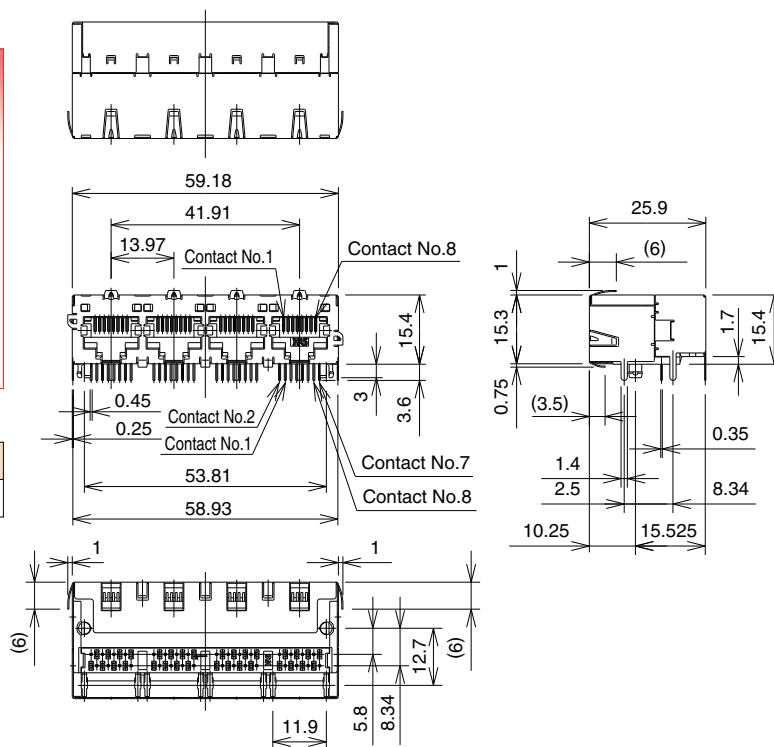


◆Recommended PCB Mounting Patterns


LED Mount Area Dimensions

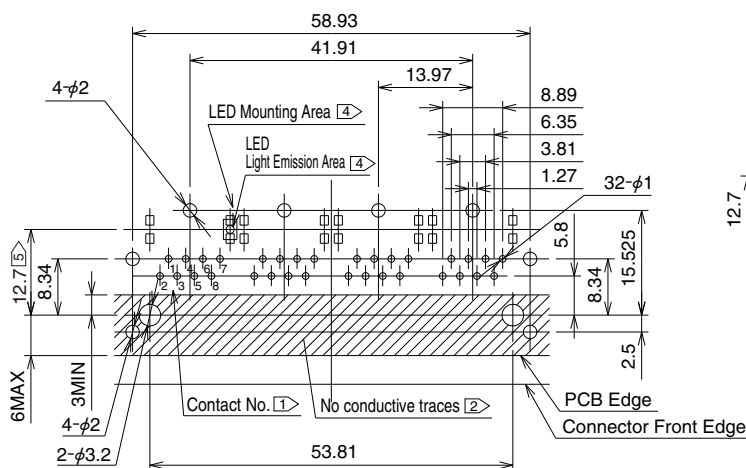


CL-220 Series



SML-010 Series



SML-020 Series




*Recommendations for PCB Design

- Note that the contact arrangement for contact No.1 and No.2 and No.7 and No.8 are switched.
For LED specifications, contact the LED manufacturer.
- Areas indicated should be free of conductive traces.
- Recommended board thickness: 1.6mm.
- The LED for the jack connector with built-in light pipe is mounted on the PCB. Please use the compatible LEDs shown on the table.
For LED specifications, contact the LED manufacturer.
- Mount so that the center of the light emitting part of the LED is at the center of the dimensions indicated in the diagram.
- Please check the latest dimension of LED pad with the corresponding LED manufacturer before designing.


4 Applicable LEDs

Series Name	Manufacturer
CL-220	Citizen Electronics Co., Ltd.
CL-221	Citizen Electronics Co., Ltd.
SML-010	Rohm Co., LTD
SML-020	Rohm Co., LTD

1 Contact Arrangement

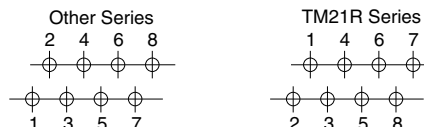

◆Recommended Panel Cutout Diagram

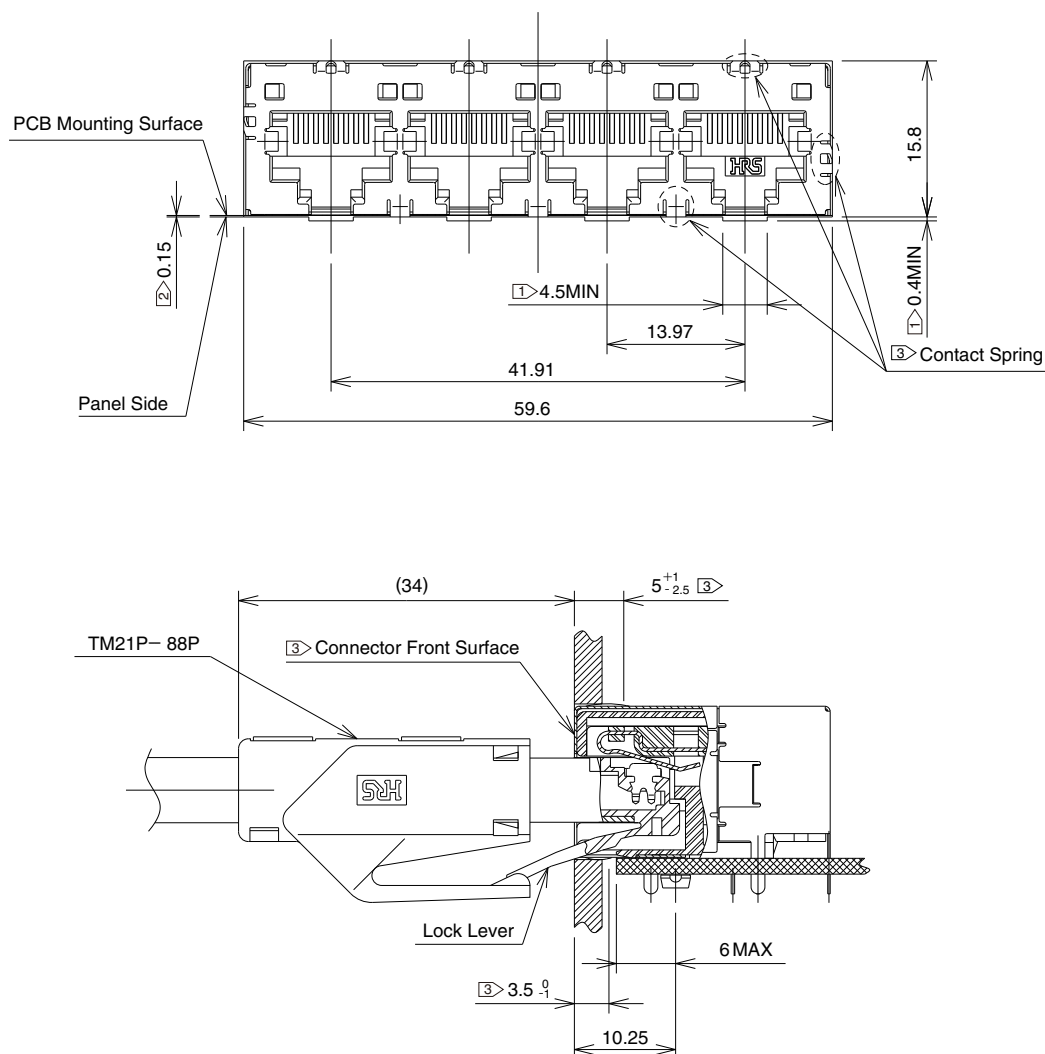

*Recommendations for Panel Design

- ① When making the panel, make a notch according to the dimensions shown as a relief for the plug lock lever.
- ② Set the panel mounting position so that the bottom surface of the panel is 0.15mm below the PCB mounting surface.
- ③ The contact position of the contact spring is $5^{+1}_{-2.5}$ (top and sides) and 3.5^{0}_{-1} (back side) from the front surface of the connector. Please be careful when setting the panel position.



●Usage Precautions for Built-in Light Pipe Type

IPA cleaning at room temperature is recommended for cleaning. When using a liquid-based cleaning agent, the color of the light pipe (made of polycarbonate resin) may change. Please select a cleaning agent after reviewing the table of cleaning agent effects on resin issued by cleaning agent manufacturers.

●2 Row×4 Ports




●2 Row×6 Ports

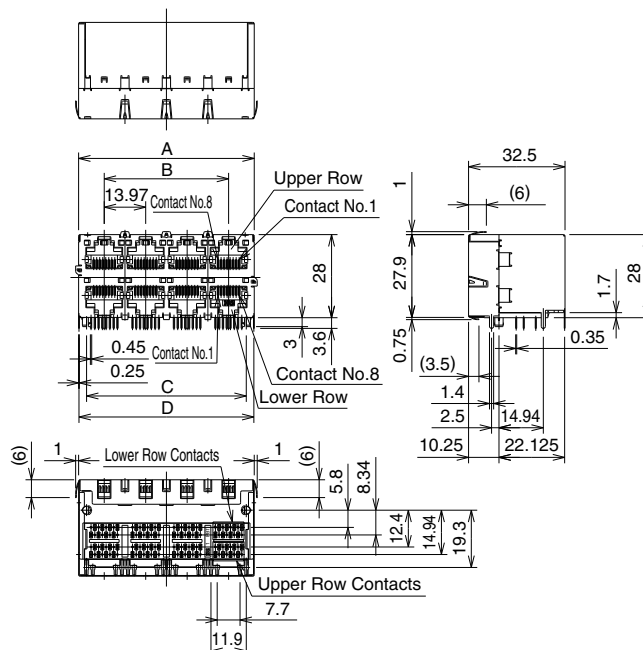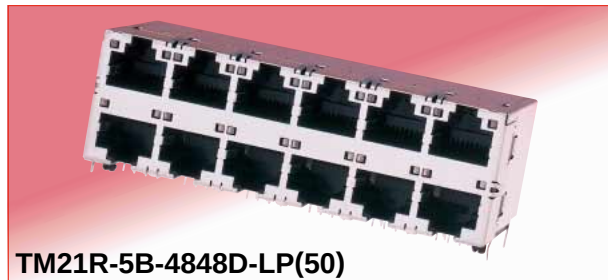

Part No.	HRS No.	A	B	C	D	RoHS
TM21R-5B-3232D-LP(50)	222-2879-1 50	59.18	41.91	53.81	58.93	YES
TM21R-5B-4848D-LP(50)	222-2885-4 50	87.12	69.85	81.75	86.87	

◆Recommended PCB Mounting Pattern

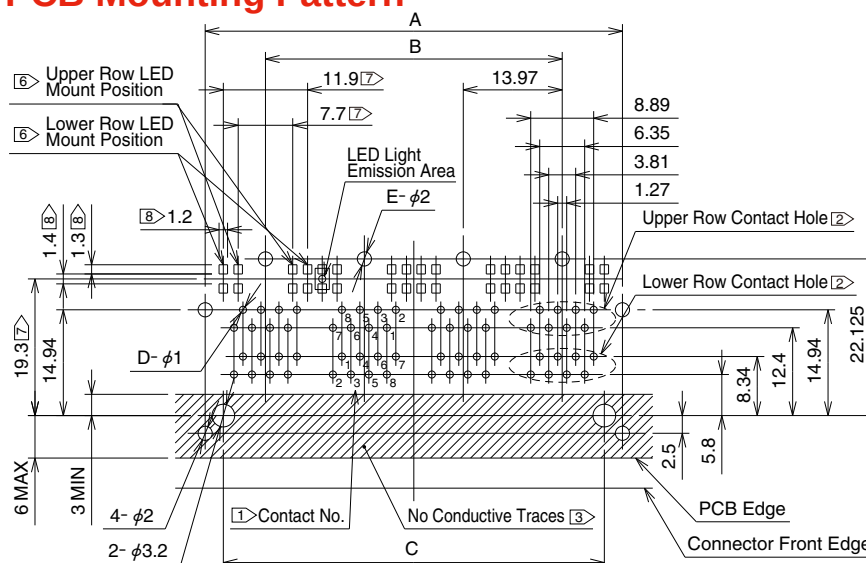


Part No.	HRS No.	A	B	C	D	E
TM21R-5B-3232D-LP(50)	222-2879-1 50	58.93	41.91	53.81	64	4
TM21R-5B-4848D-LP(50)	222-2885-4 50	86.87	69.85	81.75	96	6

*Recommendations for PCB Design

- Note that the contact arrangement for contact No.1 and No.2 and No.7 and No.8 are switched.
- The positions of the upper and lower contacts are as shown in the drawing.
- Areas indicated should be free of conductive traces.
- Recommended board thickness : 1.6mm.
- The LED for the jack connector with built-in light pipe is mounted on the PCB. Please use the compatible LEDs shown on the table. For LED specifications, contact the LED manufacturer.
- The mounting positions of the upper and lower LED are as shown in the drawing.
- Mount so that the center of the light emitting part of the LED is at the center of the dimensions indicated in the diagram.
- Please check the latest dimension of LED pad with the corresponding LED manufacturer before designing.


1 Contact Arrangement

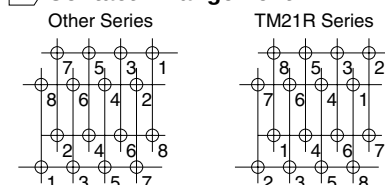


5 Applicable LEDs

Series Name	Manufacturer
CL-220	Citizen Electronics Co., Ltd.
CL-221	Citizen Electronics Co., Ltd.

◆ Panel Cutout

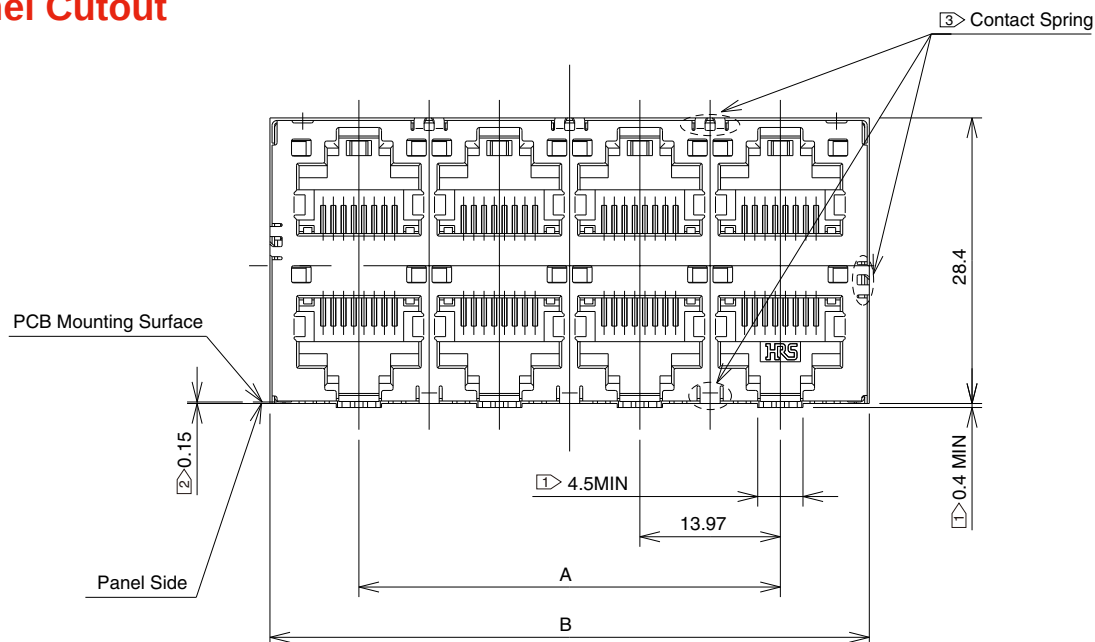

Part No.	HRS No.	A	B	RoHS
TM21R-5B-3232D-LP(50)	222-2879-1 50	41.91	59.6	YES
TM21R-5B-4848D-LP(50)	222-2885-4 50	69.85	87.54	

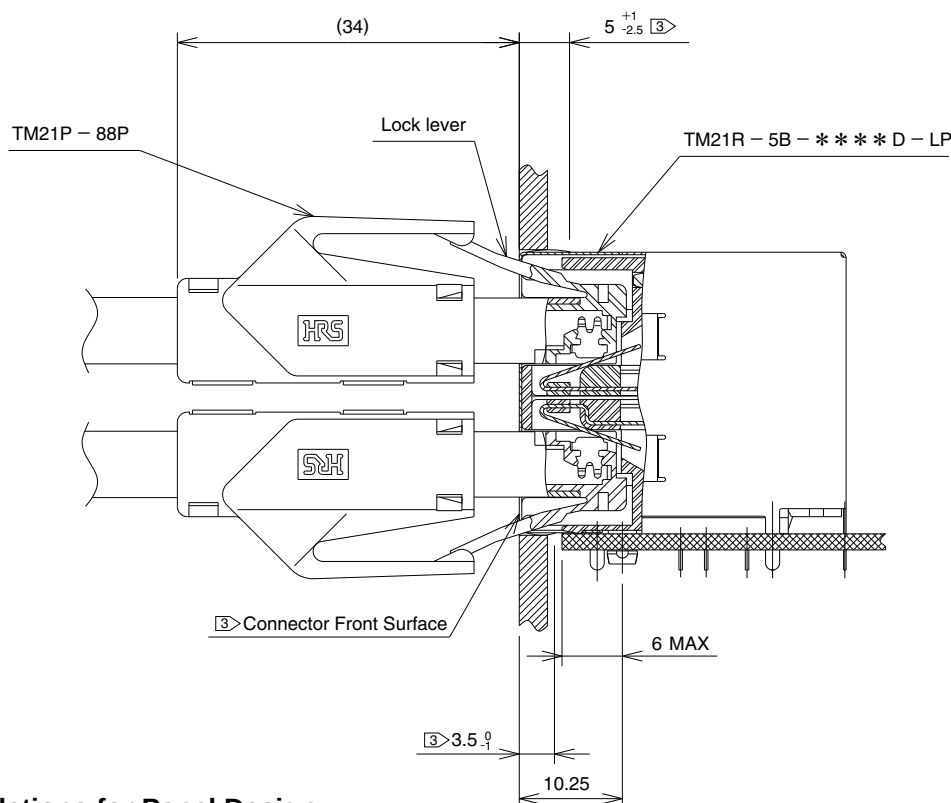

*Recommendations for Panel Design

- 1 When making the panel, make a notch according to the dimensions shown as a relief for the plug lock lever.
- 2 Set the panel mounting position so that the bottom surface of the panel is 0.15mm below the PCB mounting surface.
- 3 The contact position of the contact spring is $5^{+1}_{-2.5}$ (upper and side) and 3.5^{0}_{-1} (lower) from the front surface of the connector. Please be careful when setting the panel position.

●Usage Precautions for Built-in Light Pipe Type

IPA cleaning at room temperature is recommended for cleaning. When using a liquid-based cleaning agent, the color of the light pipe (made of polycarbonate resin) may change. Please select a cleaning agent after reviewing the table of cleaning agent effects on resin issued by cleaning agent manufacturers.


◆Technical Documentation Cat.5e Transmission Characteristics Data

The below graph is of representative values for the various transmission characteristics for the receptacle (TM21R-5C-88P) mated with plug (TM21P-88P).


The TM21R-5C series meets the requirements for Cat.5e single transmission when used with plugs manufactured on the De-embedded method of the TIA/EIA-568-B.2 standard.

Note : This data is for the listed mated connector pair. For other combinations, please contact a Hirose Electric representative.


●Signal Attenuation

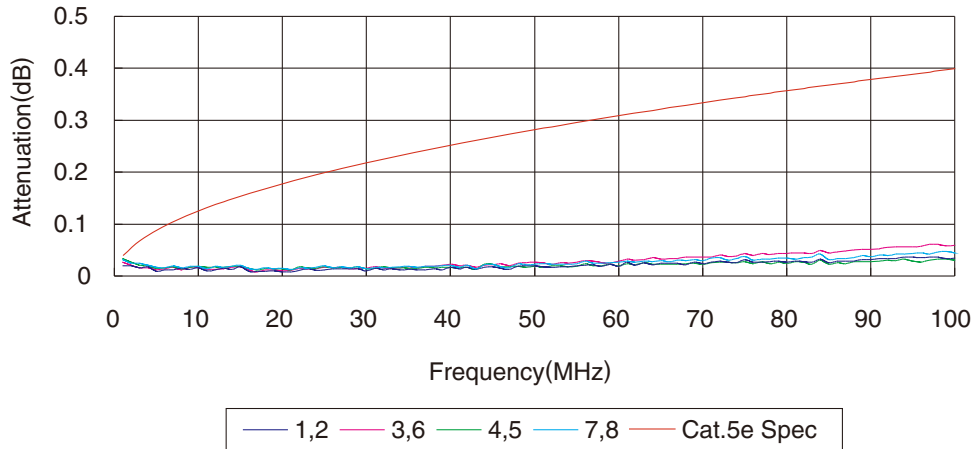


●Near-End Crosstalk (NEXT) Data

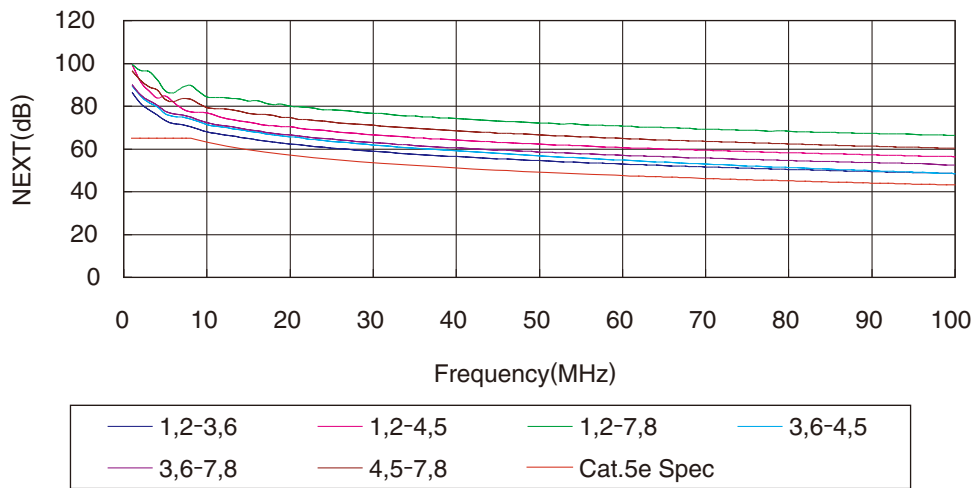


●Return Loss

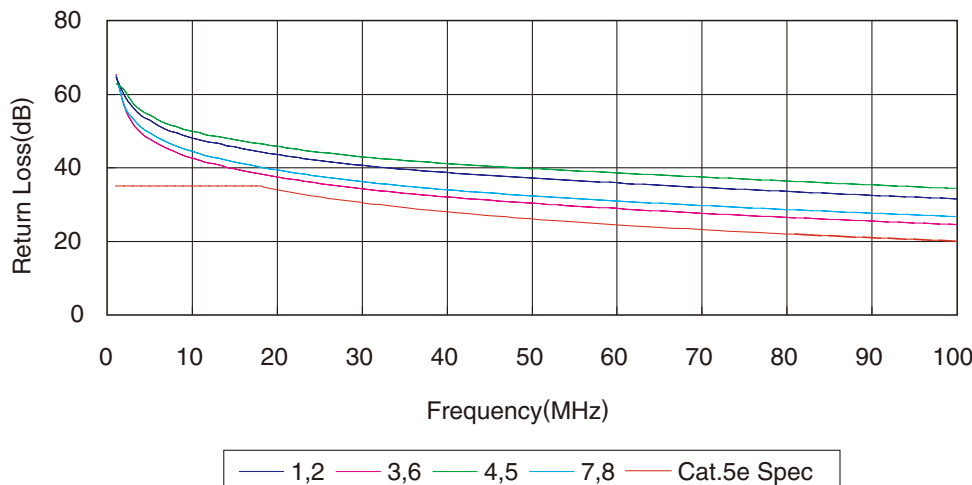


●Far-End Crosstalk (FEXT)

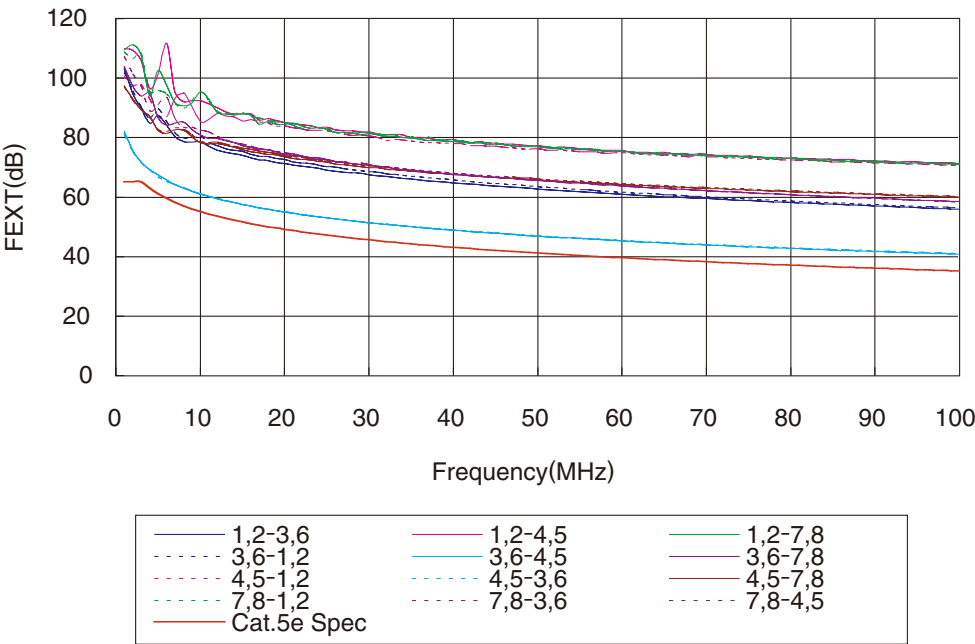

●Propagation Delay

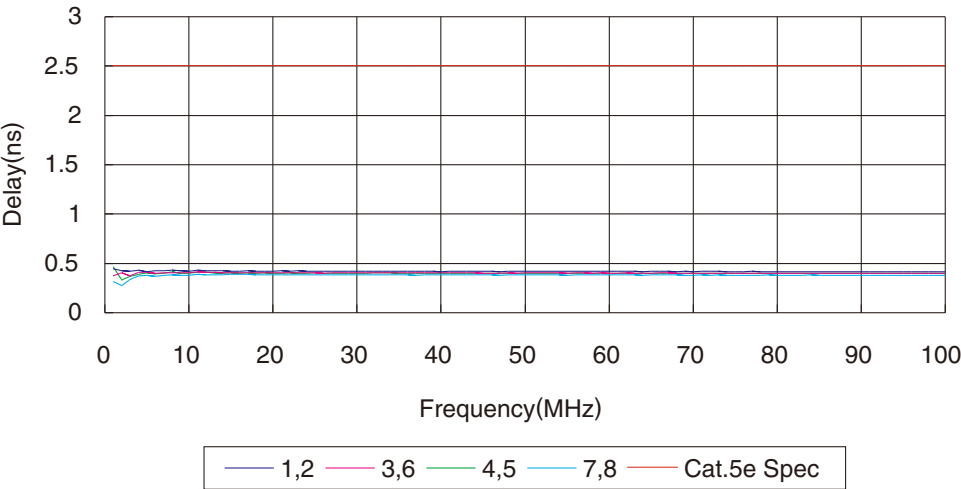

●Propagation Delay (Delay Skew)

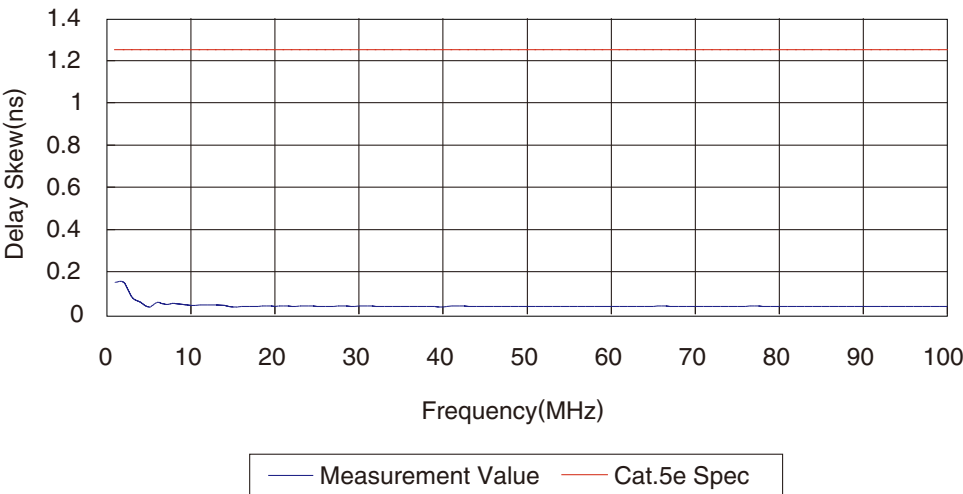

◆Reference Documentation

●CAT6 Certification Received

TM21R-5C Series meets the requirements for Cat.6 single transmission when used with plugs manufactured on the de-embedded method of the TIA/EIA-568-B.2 standard under certain conditions. A certificate was issued by GHMT, an independent European testing company.



Certificate

Customer: Hirose Electric GmbH
Zeppelinstraße 42
D-73760 Ostfildern

Description: **HIROSE TM21R-5C-88**


Applied standards: TIA/EIA-568-B 2-1 (Addendum No 1 to TIA/EIA-568-B 2)
SP-3727 TIA/EIA Draft Standard (August 24, 2001 – Draft 9a)
Transmission Performance Specifications for 4-Pair 100Ω Category 6 Cabling

Comments: The test results which were determined in the course of the measurement refer to the submitted specimen. Any future technical modifications of the component are subject to the responsibility of the manufacturer.

Up to a bandwidth of 250 MHz, the specimen, a RJ45-jack, meet the limits of the specified standards and regulations.

This Certificate refers to the comprehensive test report, no. 863/01, from 20 November 2001 and shall only be applicable in conjunction with the test report.

Bexbach, 20 November 2001



 Dipl.-Ing. Frank Streibert
(general manager)



GHMT mbH
In der Keding 13
D-66450 Bredbach
Phone: +49 (0) 69 26 / 92 28 - 0
Fax: +49 (0) 69 26 / 92 28 - 99
E-Mail: info@ghmt.de
http://www.ghmt.de


Gesellschaft für Hochfrequenz - Meßtechnik mbH

Certificate of Acceptance

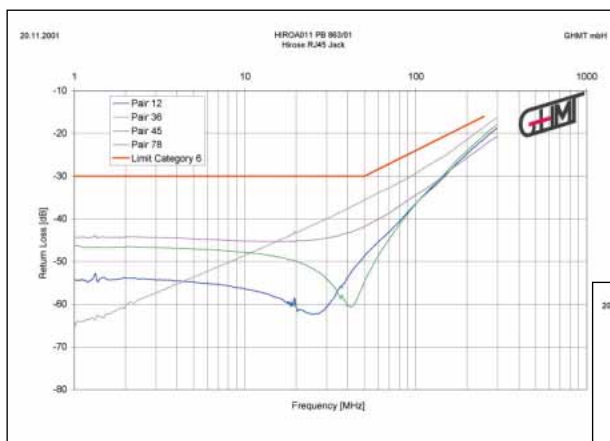

↑ Return Loss


NEXT →

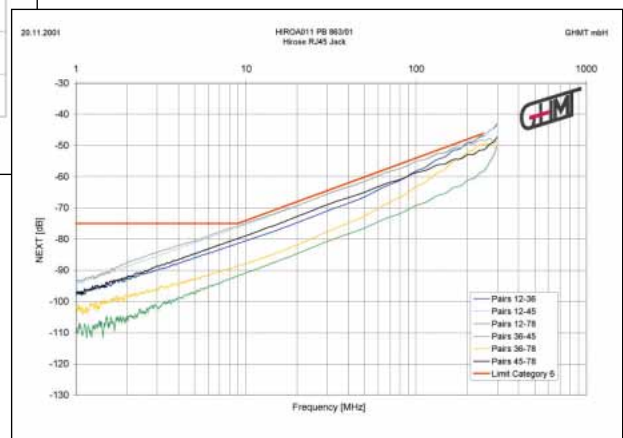

Modular Connector Guide

■Modular Connector Contact Numbers (8pos.)


The numbers below comply with FCC standards. Please be aware of how contact numbers are decided during design.

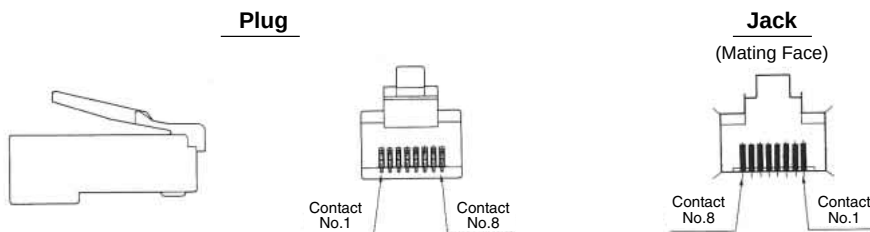

■Plug Mating Cautions

Use only plugs that conform to FCC standards. Pay particular attention to the contact height shown to the right.

FCC Plug Dimensions



■Mating Port Size and Number of Contacts (6pos.)

The relationship between the mating port size of the jack connector and number of contacts is shown below.



Model 66



Model 64



Model 62

Models 64 and 62 are obtained by removing 1 pin and 2 pins, respectively, from both sides of model 66. For details, please contact us for drawings because only standard models are shown in the catalogs.

■Recommended Soldering for Modular Through-Hole Connectors

●Same for Types With/Without Built-in Light Pipe

●Flow solder (automatic soldering machine)

Pre-heat	: 90 - 130°C
Pre-heat time	: 120 seconds maximum
Solder temperature	: 240 - 260°C
Soldering time	: 10 seconds maximum


●Hand soldering

Soldering iron tip temperature	: 350°C
Soldering temperature	: 5seconds maximum
Soldering iron output	: 30 - 40W

Note : When soldering, do not apply excessive force to the connector terminals.

●Recommended Solder composition: Paste, 96.5%Sn/3.0%Ag/0.5%Cu

●Through-Hole Mounting Type

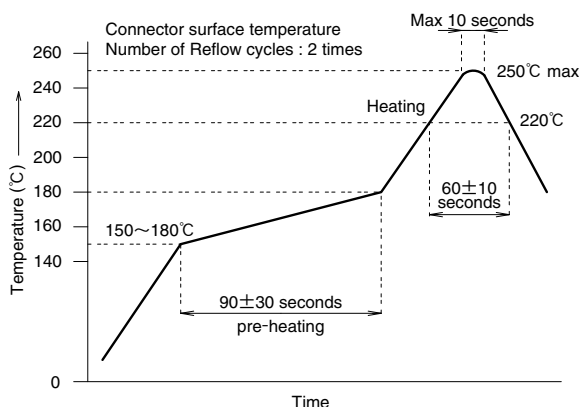

The temperature profile may vary due to external conditions such as the type of cream solder, manufacturer, and board size. Please contact the solder manufacturer for their specifications.

HIROSE ELECTRIC CO.,LTD.

2-6-3,Nakagawa Chuoh,Tsuzuki-Ku,Yokohama-Shi 224-8540,JAPAN

<https://www.hirose.com/>