

C3M0160120K1

Silicon Carbide Power MOSFET
N-Channel Enhancement Mode

Features

- Optimized package with separate driver source pin
- Lower profile TO-247-4 package body
- High blocking voltage with low on-resistance
- High-speed switching with low capacitances
- Fast intrinsic diode with low reverse recovery (Q_{rr})
- Halogen free, RoHS compliant

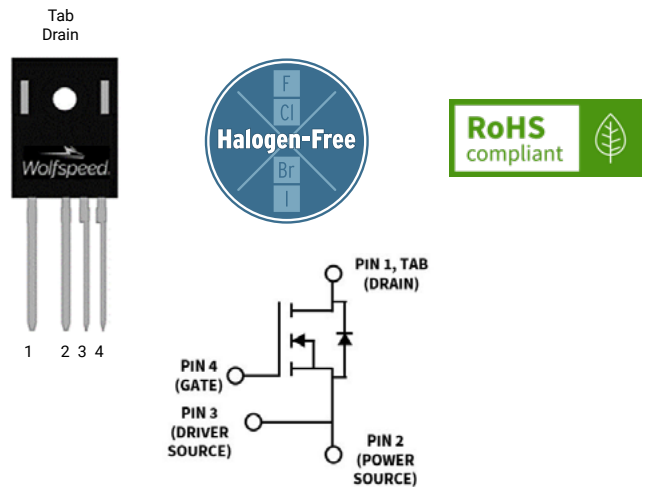
Benefits

- Reduce switching losses and minimize gate ringing
- Higher system efficiency
- Reduce cooling requirements
- Increase power density
- Increase system switching frequency

Applications

- Motor Control
- EV Battery Chargers
- High Voltage DC/DC Converters
- Solar/ESS
- UPS
- Enterprise PSU

Package



Part Number	Package	Marking
C3M0160120K1	TO-247-4L LP	C3M0160120K1

Key Parameters

Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions	Note
Drain - Source Voltage	V_{DS}			1200	V	$T_c = 25^\circ\text{C}$	
Maximum Gate - Source Voltage	$V_{GS(max)}$	-8		+19		Transient	
Operational Gate-Source Voltage	$V_{GS op}$		-4/15			Static	Note 1
DC Continuous Drain Current	I_D			17.9	A	$V_{GS} = 15\text{ V}, T_c = 25^\circ\text{C}, T_J \leq 175^\circ\text{C}$	Fig. 19
				13.5		$V_{GS} = 15\text{ V}, T_c = 100^\circ\text{C}, T_J \leq 175^\circ\text{C}$	Note 2
Pulsed Drain Current	I_{DM}			34		t_{Pmax} limited by T_{Jmax} $V_{GS} = 15\text{ V}, T_c = 25^\circ\text{C}$	Fig. 22
Power Dissipation	P_D			103	W	$T_c = 25^\circ\text{C}, T_J = 175^\circ\text{C}$	Fig. 20
Operating Junction and Storage Temperature	T_J, T_{stg}			-40 to +175	$^\circ\text{C}$		
Solder Temperature	T_L			260		According to JEDEC J-STD-020	
Mounting Torque	M_D			1 8.8	Nm lbf-in	M3 or 6-32 screw	

Note (1): Recommended turn-on gate voltage is 15V with $\pm 5\%$ regulation tolerance, see Application Note PRD-04814 for additional details

Note (2): Verified by design


Electrical Characteristics ($T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	1200			V	$V_{GS} = 0\text{ V}, I_D = 100\text{ }\mu\text{A}$	
$V_{GS(th)}$	Gate Threshold Voltage	1.8	2.8	3.8	V	$V_{DS} = V_{GS}, I_D = 2.33\text{ mA}$	Fig. 11
			2.2		V	$V_{DS} = V_{GS}, I_D = 2.33\text{ mA}, T_J = 175^\circ\text{C}$	
I_{DSS}	Zero Gate Voltage Drain Current		1	50	μA	$V_{DS} = 1200\text{ V}, V_{GS} = 0\text{ V}$	
I_{GSS}	Gate-Source Leakage Current		10	250	nA	$V_{GS} = 15\text{ V}, V_{DS} = 0\text{ V}$	
$R_{DS(on)}$	Drain-Source On-State Resistance		159	208	m Ω	$V_{GS} = 15\text{ V}, I_D = 8.5\text{ A}$	Fig. 4, 5, 6
			280			$V_{GS} = 15\text{ V}, I_D = 8.5\text{ A}, T_J = 175^\circ\text{C}$	
g_{fs}	Transconductance		4.9		S	$V_{DS} = 20\text{ V}, I_{DS} = 8.5\text{ A}$	Fig. 7
			4.6			$V_{DS} = 20\text{ V}, I_{DS} = 8.5\text{ A}, T_J = 175^\circ\text{C}$	
C_{iss}	Input Capacitance		730		pF	$V_{GS} = 0\text{ V}, V_{DS} = 0\text{ V to }1000\text{ V}$ $F = 1\text{ MHz}$ $V_{AC} = 25\text{ mV}$	Fig. 17, 18
C_{oss}	Output Capacitance		31				
C_{rss}	Reverse Transfer Capacitance		2				
E_{oss}	C_{oss} Stored Energy		17		μJ		Fig. 16
$C_{o(er)}$	Effective Output Capacitance (Energy Related)		36		pF	$V_{GS} = 0\text{ V}, V_{DS} = 0 \dots 800\text{ V}$	Note: 3
$C_{o(tr)}$	Effective Output Capacitance (Time Related)		55		pF		
E_{ON}	Turn-On Switching Energy (External Diode)		81		μJ	$V_{DS} = 800\text{ V}, V_{GS} = -4\text{ V}/15\text{ V}, I_D = 8.5\text{ A},$ $R_{G(ext)} = 2.5\text{ }\Omega, L = 404\text{ }\mu\text{H}, T_J = 175^\circ\text{C}$ FWD = External SiC DIODE	Fig. 26, 28
E_{OFF}	Turn Off Switching Energy (External Diode)		16				
E_{ON}	Turn-On Switching Energy (Body Diode FWD)		134		μJ	$V_{DS} = 800\text{ V}, V_{GS} = -4\text{ V}/15\text{ V}, I_D = 8.5\text{ A},$ $R_{G(ext)} = 2.5\text{ }\Omega, L = 404\text{ }\mu\text{H}, T_J = 175^\circ\text{C}$ FWD = Internal Body Diode	Fig. 26, 28
E_{OFF}	Turn-Off Switching Energy (Body Diode FWD)		15				
$t_{d(on)}$	Turn-On Delay Time		8		ns	$V_{DD} = 800\text{ V}, V_{GS} = -4\text{ V}/15\text{ V}$ $I_D = 8.5\text{ A}, R_{G(ext)} = 2.5\text{ }\Omega,$ Timing relative to V_{DS} Inductive load	Fig. 27, 28
t_r	Rise Time		9				
$t_{d(off)}$	Turn-Off Delay Time		13				
t_f	Fall Time		12				
$R_{G(int)}$	Internal Gate Resistance		6.5		Ω	$f = 1\text{ MHz}, V_{AC} = 25\text{ mV}$	
Q_{gs}	Gate to Source Charge		10		nC	$V_{DS} = 800\text{ V}, V_{GS} = -4\text{ V}/15\text{ V}$ $I_D = 8.5\text{ A}$ Per IEC60747-8-4 pg 21	Fig. 12
Q_{gd}	Gate to Drain Charge		12				
Q_g	Total Gate Charge		32				

Note (3): $C_{o(er)}$, a lumped capacitance that gives same stored energy as C_{oss} while V_{ds} is rising from 0 to 800V
 $C_{o(tr)}$, a lumped capacitance that gives same charging time as C_{oss} while V_{ds} is rising from 0 to 800V

Reverse Diode Characteristics (T_c = 25°C unless otherwise specified)

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V _{SD}	Diode Forward Voltage	4.8		V	V _{GS} = -4 V, I _{SD} = 4.25 A, T _J = 25 °C	Fig. 8, 9, 10
		4.2		V	V _{GS} = -4 V, I _{SD} = 4.25 A, T _J = 175 °C	
I _S	Continuous Diode Forward Current		17	A	V _{GS} = -4 V, T _c = 25°C	
I _{SM}	Diode pulse Current		34	A	V _{GS} = -4 V, pulse width t _p limited by T _{Jmax}	
t _{rr}	Reverse Recover time	9		ns	V _{GS} = -4 V, I _{SD} = 8.5 A, V _R = 800 V dif/dt = 6080 A/μs, T _J = 175 °C	
Q _{rr}	Reverse Recovery Charge	169		nC		
I _{rrm}	Peak Reverse Recovery Current	27		A		
t _{rr}	Reverse Recover time	23		ns	V _{GS} = -4 V, I _{SD} = 8.5 A, V _R = 800 V dif/dt = 1850 A/μs, T _J = 175 °C	
Q _{rr}	Reverse Recovery Charge	147		nC		
I _{rrm}	Peak Reverse Recovery Current	11		A		

Thermal Characteristics

Symbol	Parameter	Typ.	Unit	Test Conditions	Note
R _{θJC}	Thermal Resistance from Junction to Case	1.13	°C/W		Fig. 21



Typical Performance

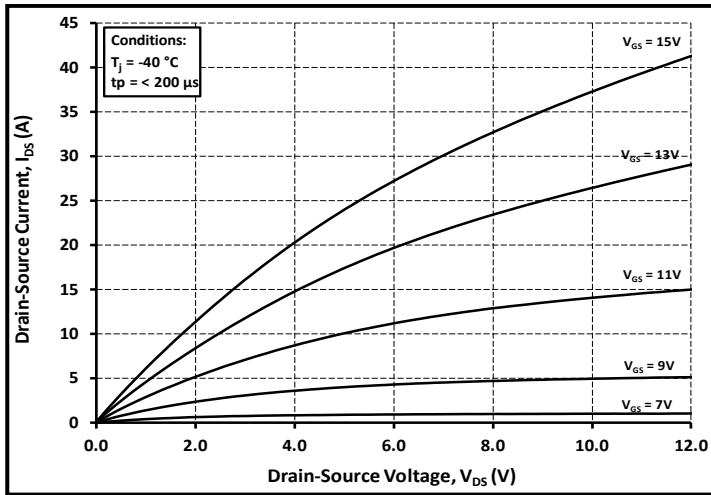


Figure 1. Output Characteristics $T_J = -40\text{ }^{\circ}\text{C}$

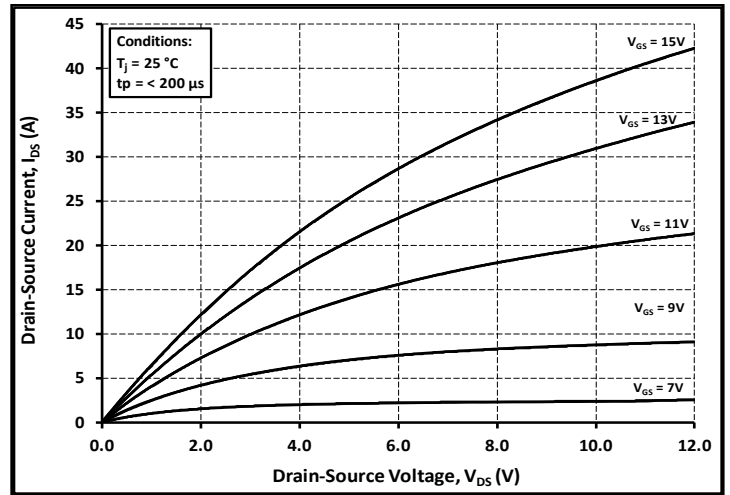


Figure 2. Output Characteristics $T_J = 25\text{ }^{\circ}\text{C}$

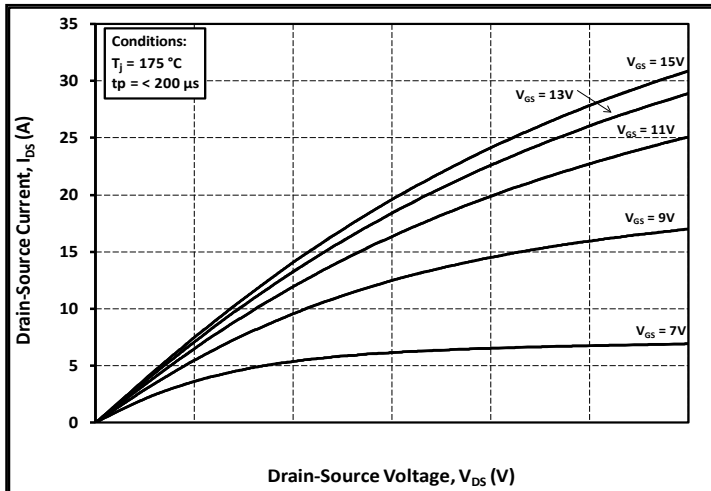


Figure 3. Output Characteristics $T_J = 175\text{ }^{\circ}\text{C}$

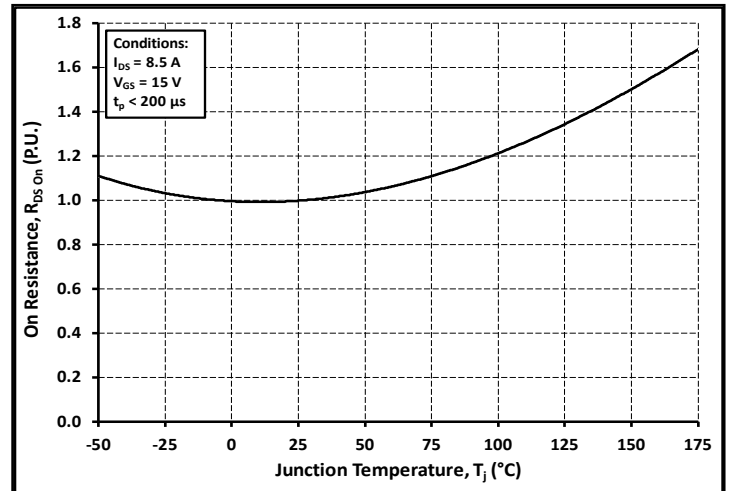


Figure 4. Normalized On-Resistance vs. Temperature

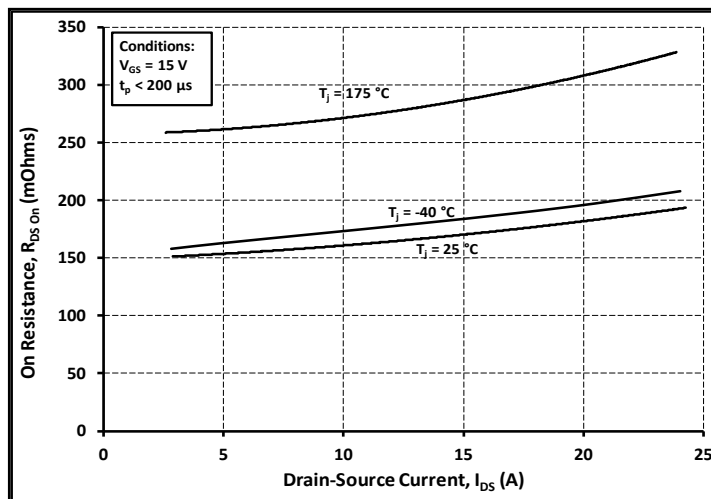


Figure 5. On-Resistance vs. Drain Current
For Various Temperatures

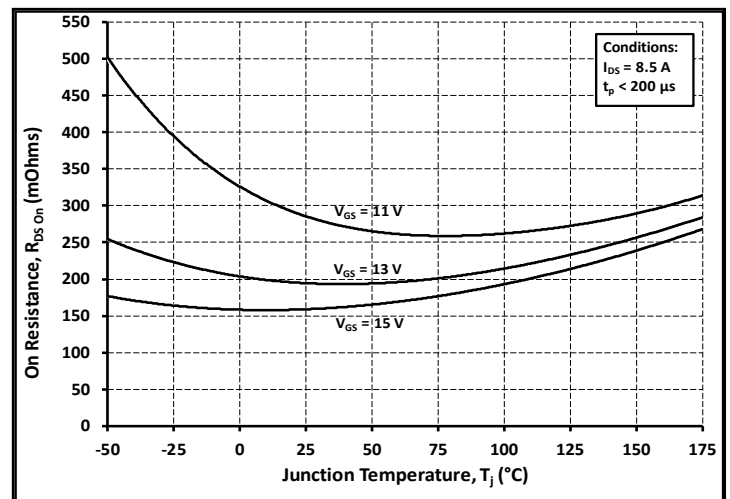


Figure 6. On-Resistance vs. Temperature
For Various Gate Voltage

Typical Performance

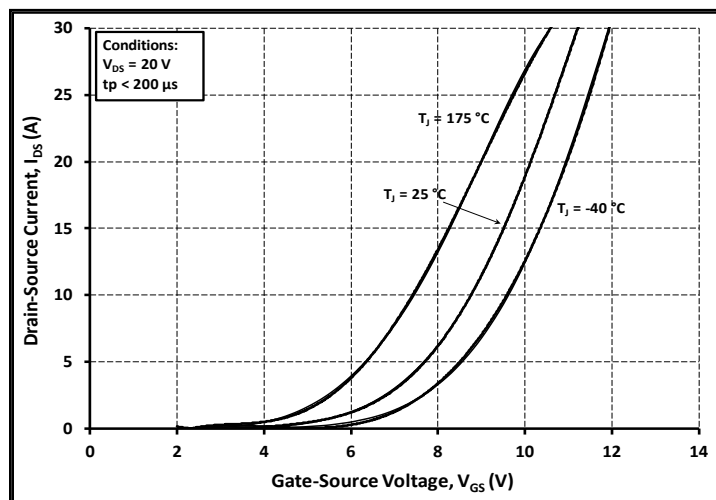


Figure 7. Transfer Characteristic for Various Junction Temperatures

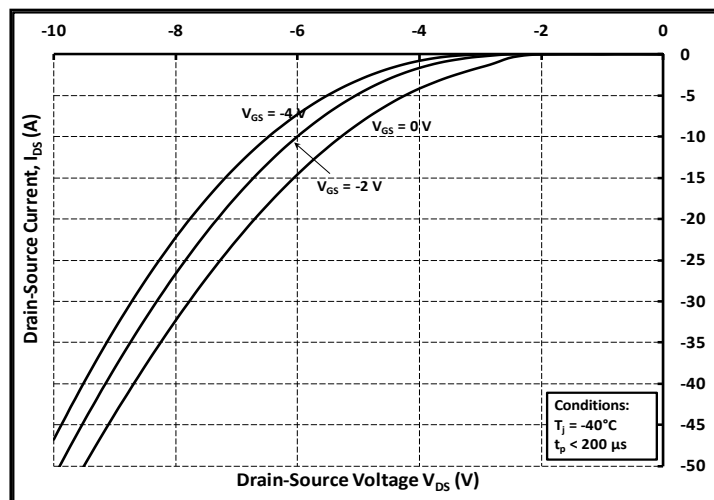


Figure 8. Body Diode Characteristic at -40 °C

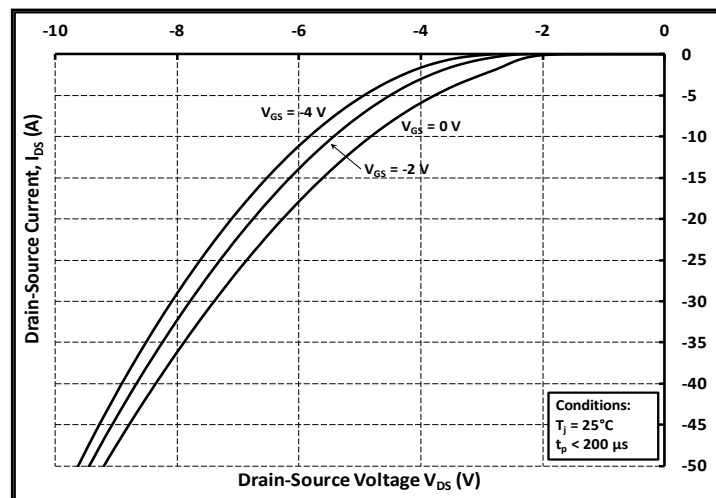


Figure 9. Body Diode Characteristic at 25 °C

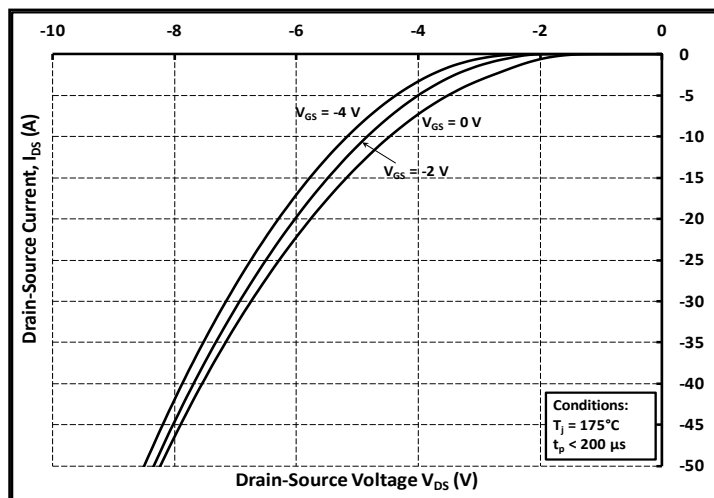


Figure 10. Body Diode Characteristic at 175 °C

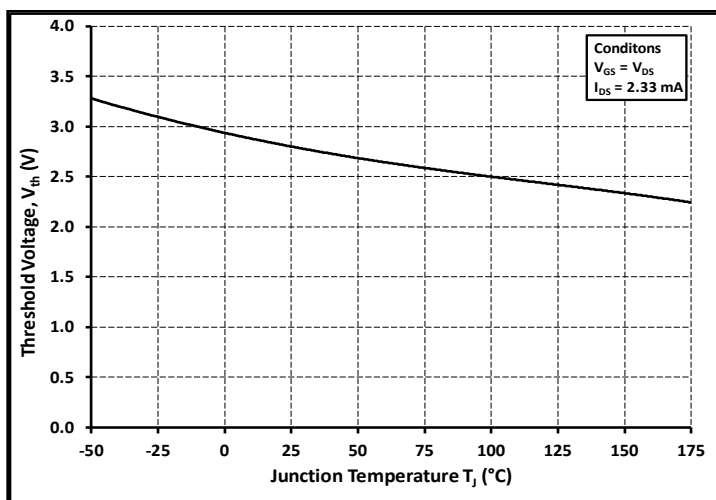


Figure 11. Threshold Voltage vs. Temperature

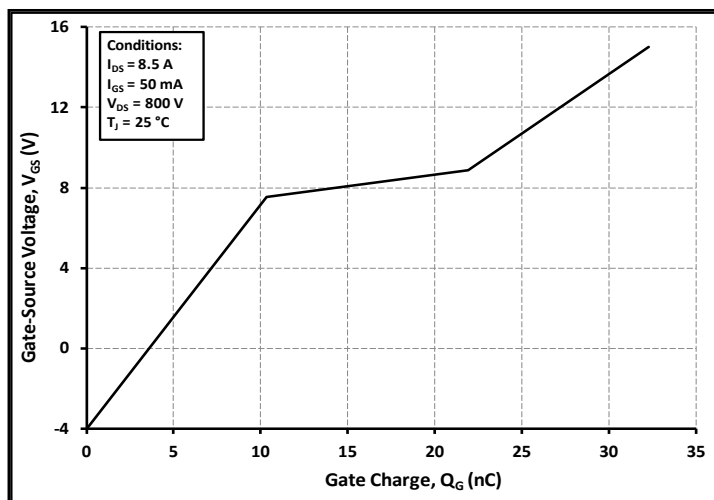


Figure 12. Gate Charge Characteristics

Typical Performance

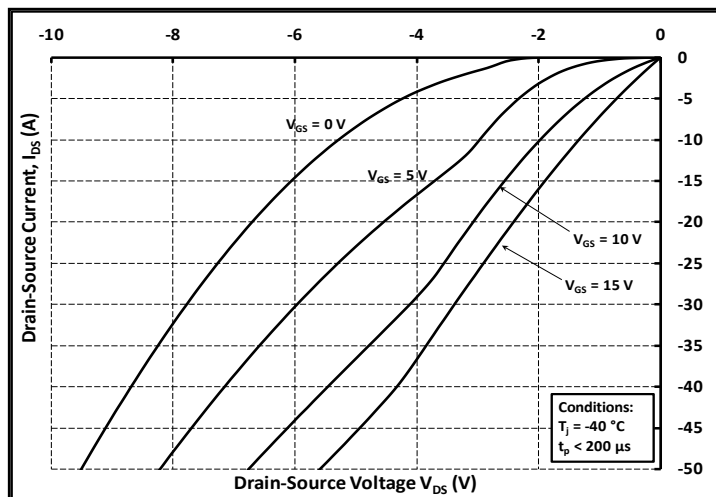
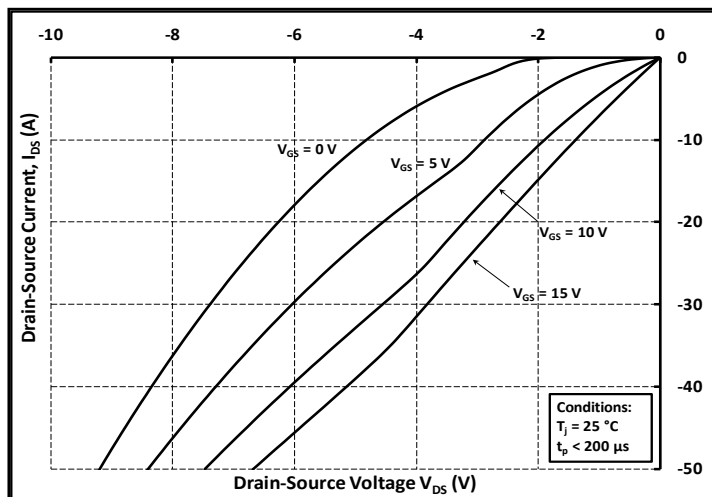
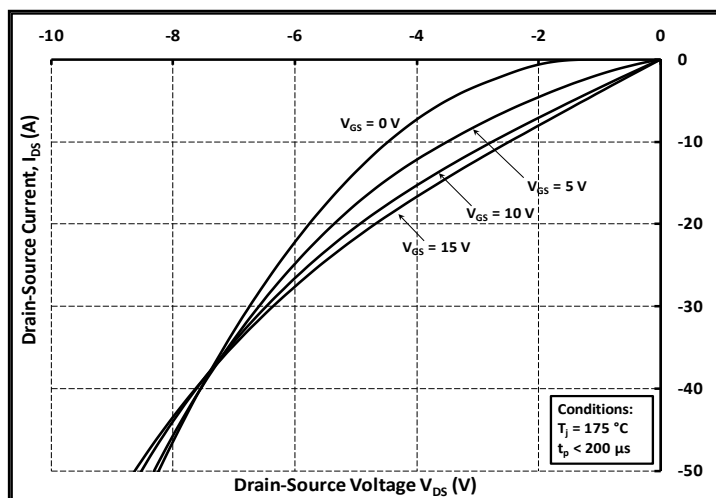
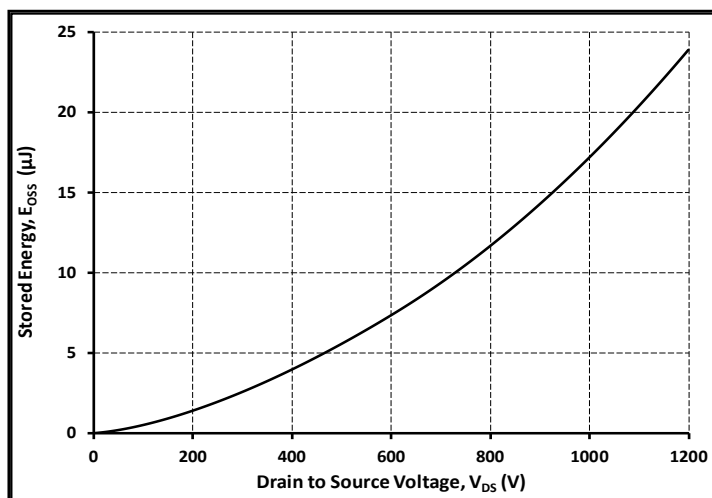
Figure 13. 3rd Quadrant Characteristic at $-40\text{ }^{\circ}\text{C}$ Figure 14. 3rd Quadrant Characteristic at $25\text{ }^{\circ}\text{C}$ Figure 15. 3rd Quadrant Characteristic at $175\text{ }^{\circ}\text{C}$ 

Figure 16. Output Capacitor Stored Energy

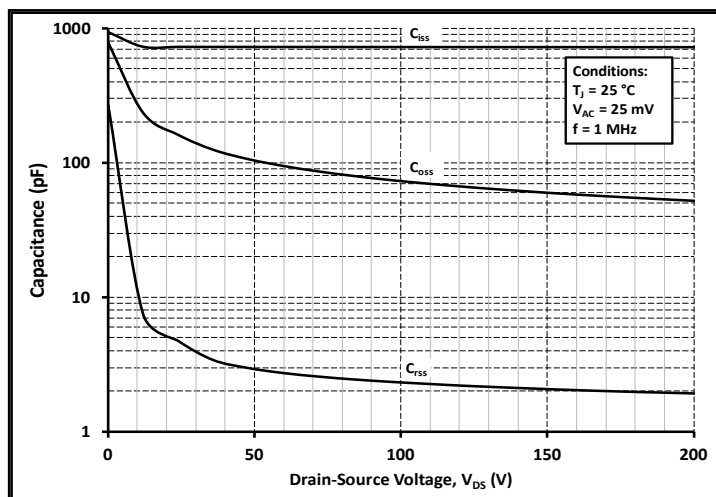


Figure 17. Capacitances vs. Drain-Source Voltage (0 - 200V)

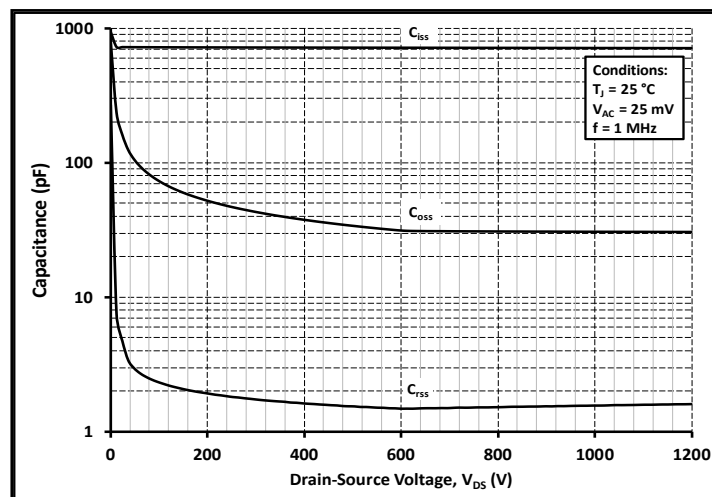


Figure 18. Capacitances vs. Drain-Source Voltage (0 - 1200V)

Typical Performance

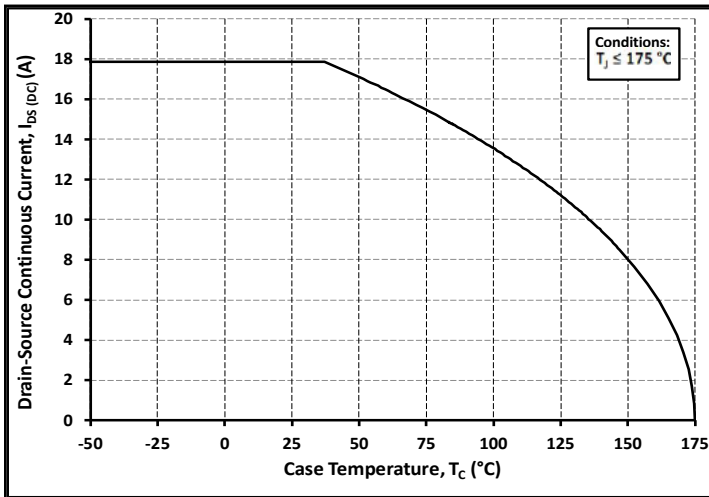


Figure 19. Continuous Drain Current Derating vs. Case Temperature

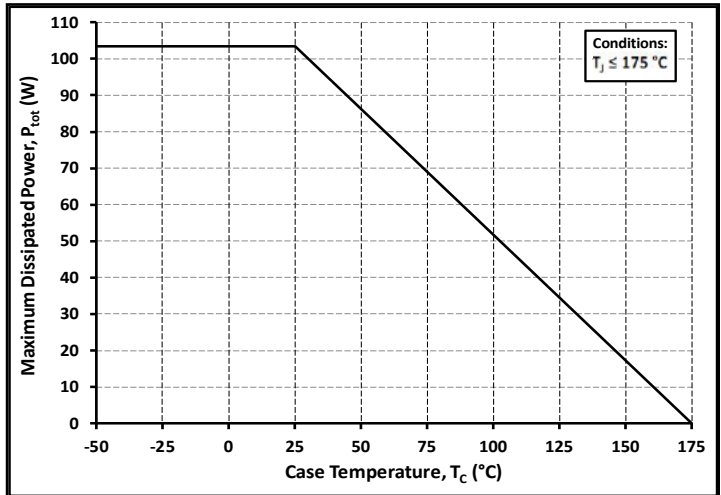


Figure 20. Maximum Power Dissipation Derating vs. Case Temperature

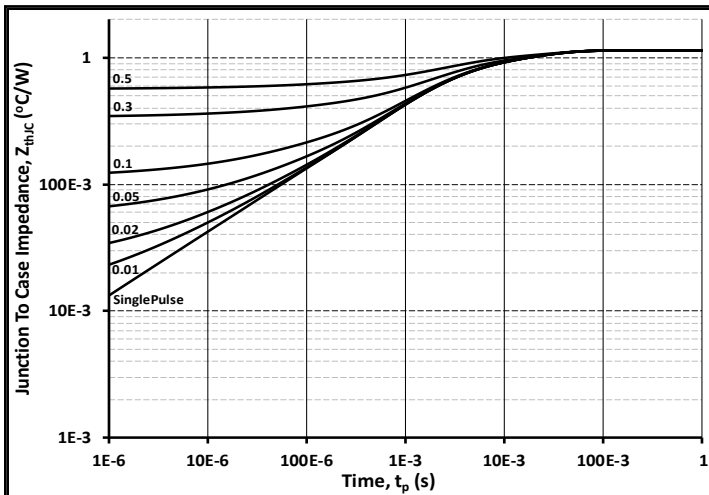


Figure 21. Transient Thermal Impedance (Junction - Case)

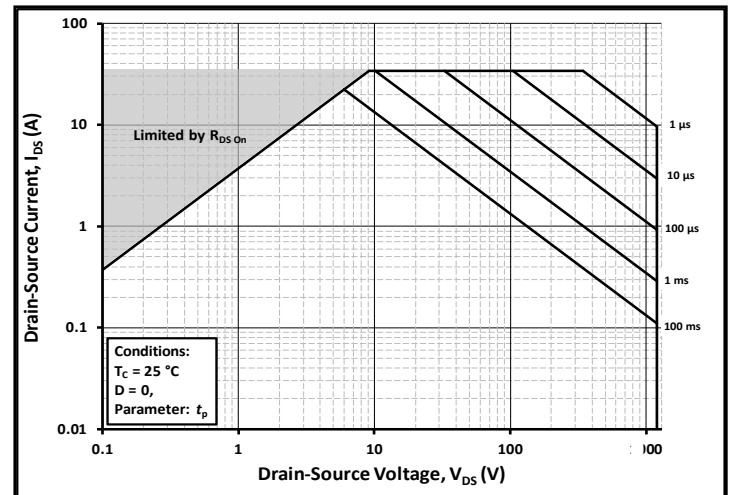
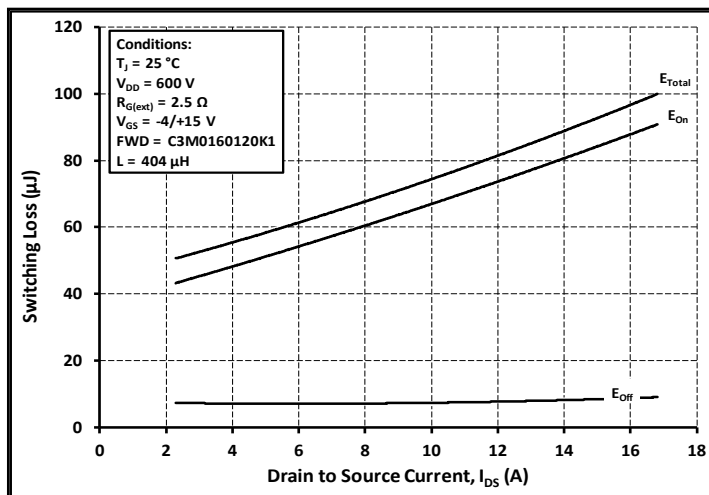
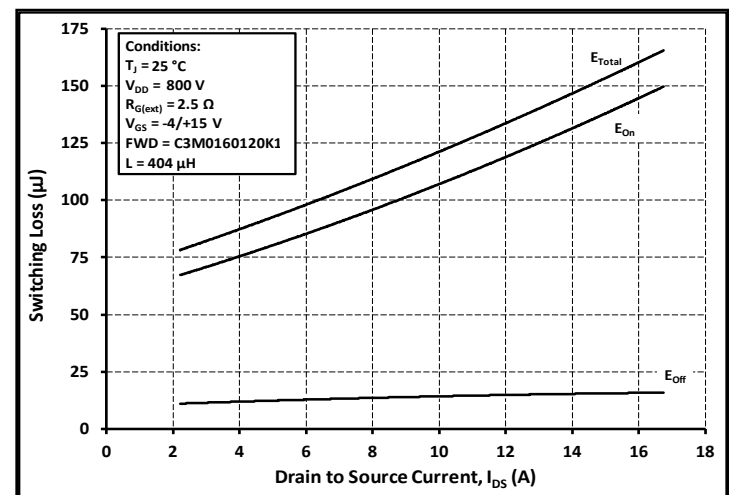


Figure 22. Safe Operating Area

Figure 23. Clamped Inductive Switching Energy vs. Drain Current ($V_{DD} = 600V$)Figure 24. Clamped Inductive Switching Energy vs. Drain Current ($V_{DD} = 800V$)

Typical Performance

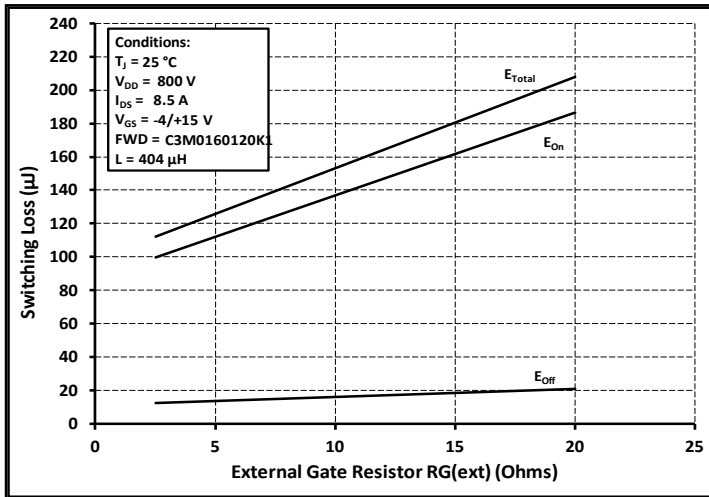
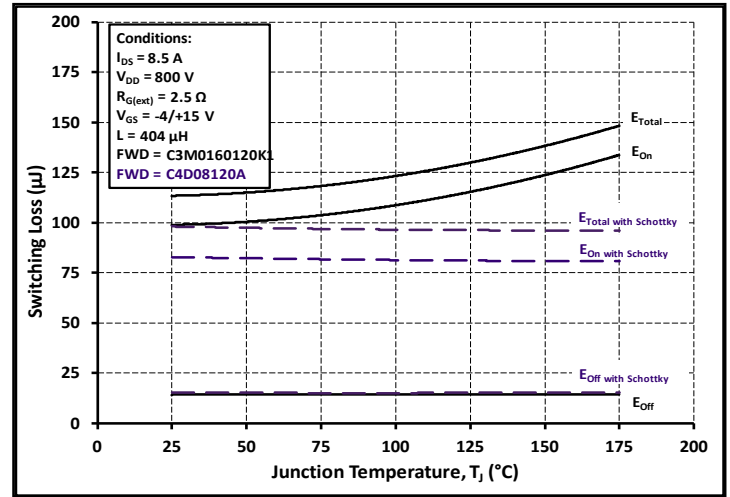
Figure 25. Clamped Inductive Switching Energy vs. $R_{G(\text{ext})}$ 

Figure 26. Clamped Inductive Switching Energy vs. Temperature

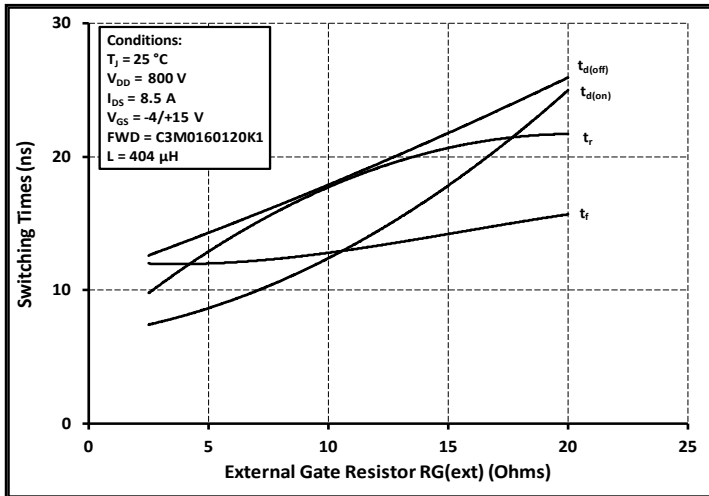
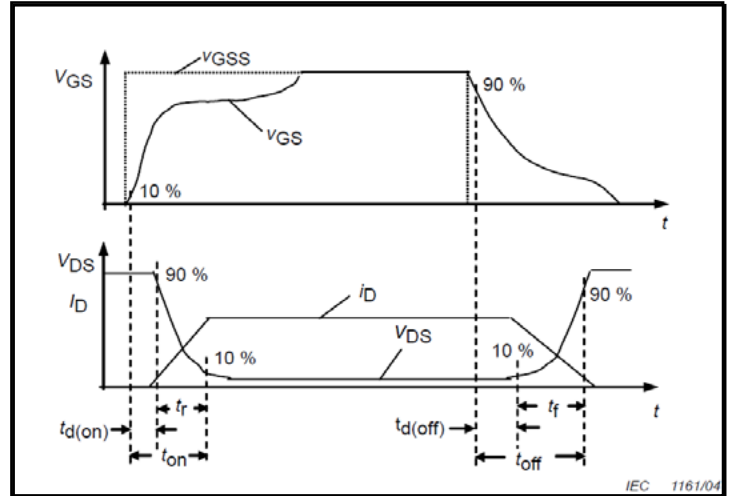
Figure 27. Switching Times vs. $R_{G(\text{ext})}$ 

Figure 28. Switching Times Definition

Test Circuit Schematic


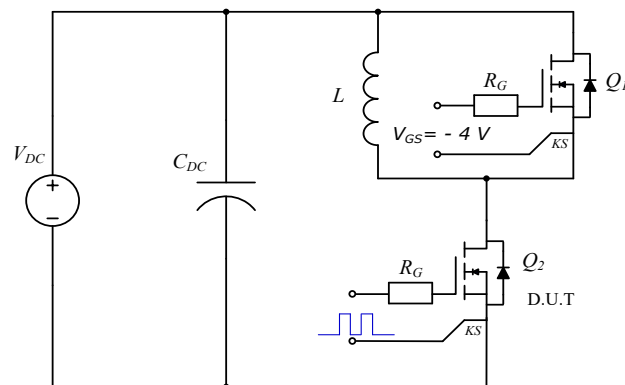



Figure 29. Clamped Inductive Switching Waveform Test Circuit

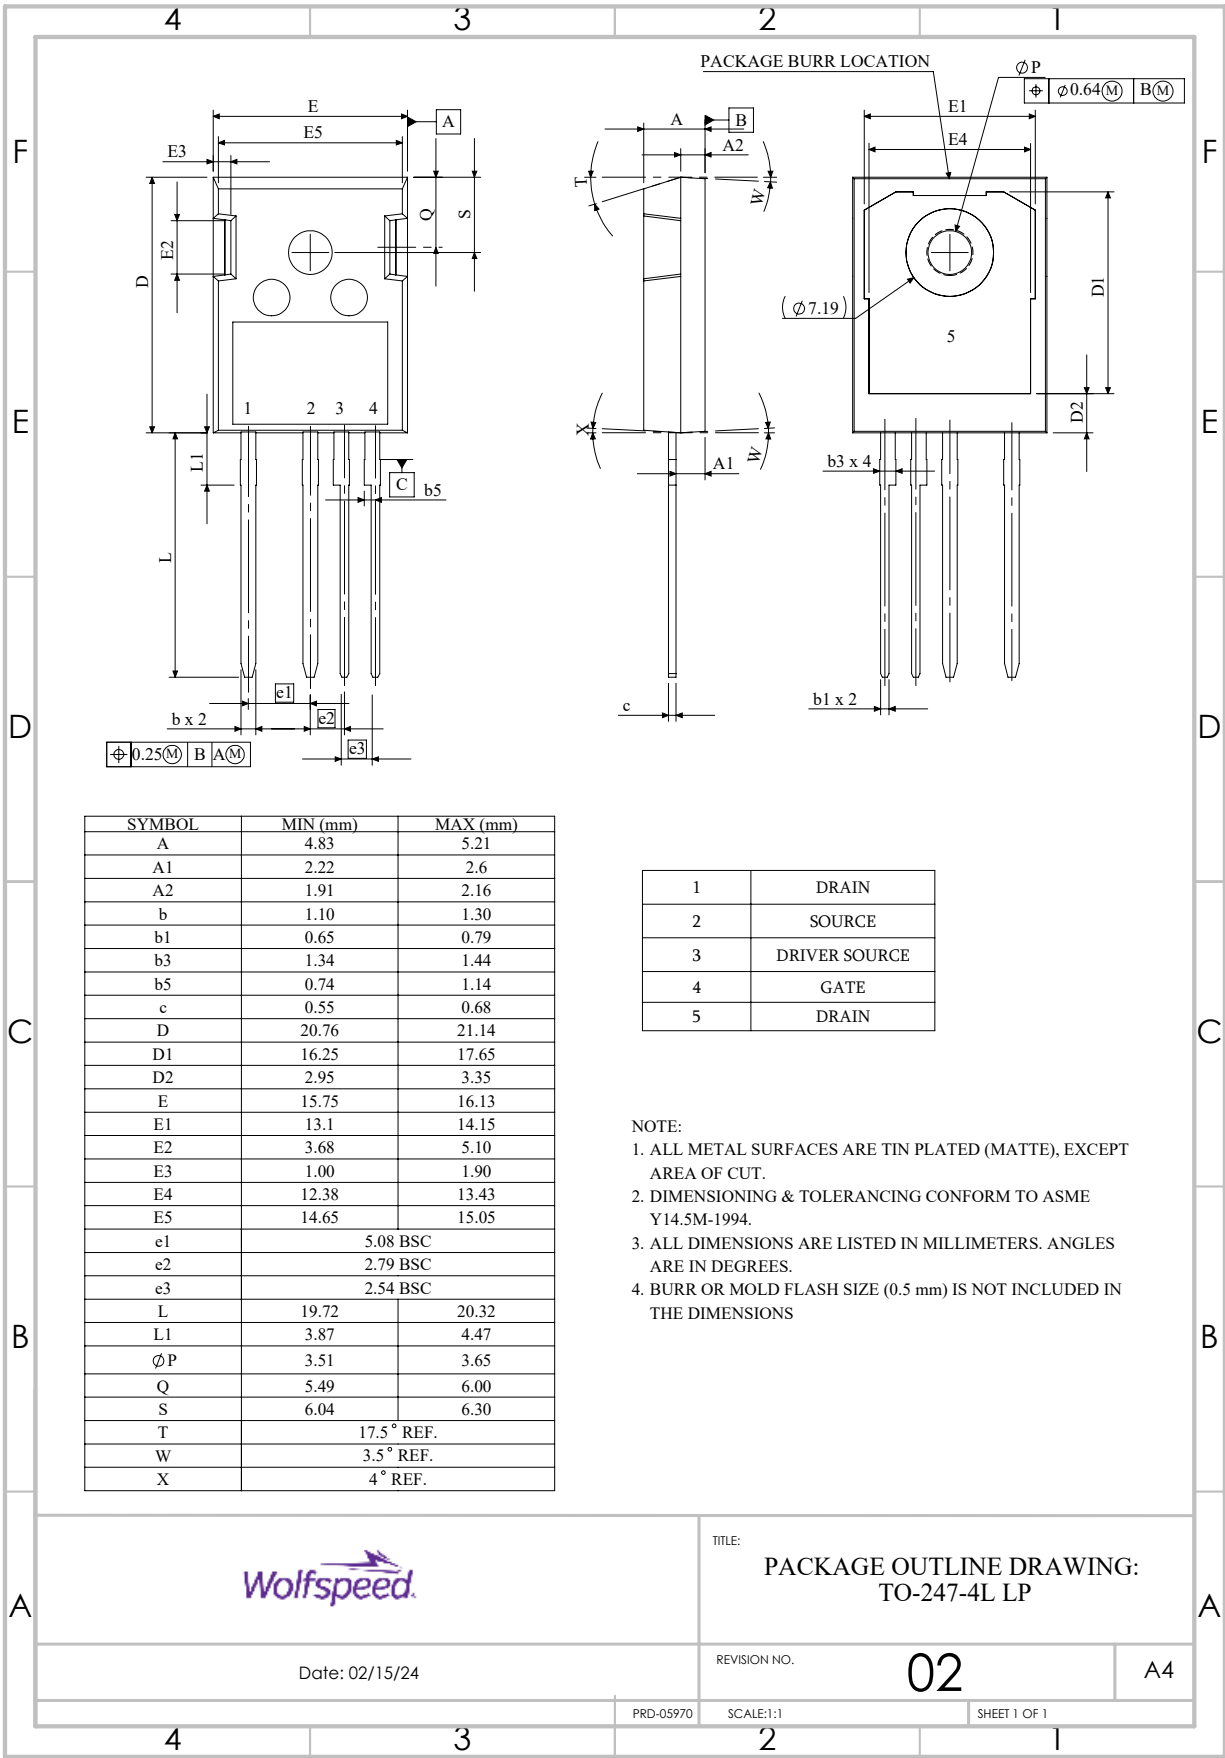Package Dimensions



Recommended Solder Pad Layout

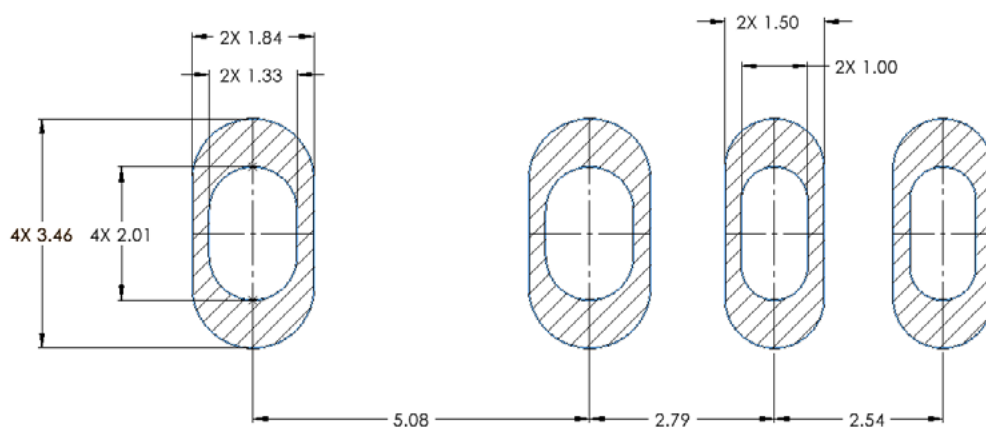All dimensions in mm



Revision history

Document Version	Date of release	Descriptiion of changes
1.0	April-2024	Initial datasheet



Notes & Disclaimer

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfspeed. No communication from any employee or agent of Wolfspeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

Notwithstanding any application-specific information, guidance, assistance, or support that Wolfspeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer's purposes, including without limitation for use in the applications identified in the next bullet point, and for the compliance of the buyers' products, including those that incorporate this product, with all applicable legal, regulatory, and safety-related requirements.

This product has not been designed or tested for use in, and is not intended for use in, applications in which failure of the product would reasonably be expected to cause death, personal injury, or property damage, including but not limited to equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment, aircraft navigation, communication, and control systems, aircraft power and propulsion systems, air traffic control systems, and equipment used in the planning, construction, maintenance, or operation of nuclear facilities.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Documentation sections of www.wolfspeed.com.

REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfspeed representative to ensure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

Contact info:

4600 Silicon Drive
Durham, NC 27703 USA
Tel: +1.919.313.5300
www.wolfspeed.com/power