




150W AC/DC High Reliable Multi-Industries Enclosed Type Power Supply **NSP-150** series

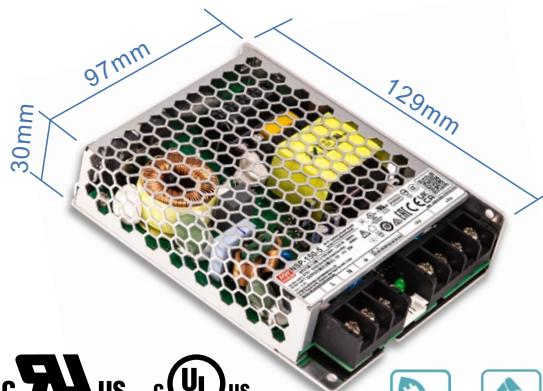

AS/NZS61558-1-2-16

GB4943.1

CNS15598-1

KC (By request)

TPTC004

AS/NZS62368-1

IS13252



■ Features

- 85~305Vac input with PFC(277Vac available)
- No load power consumption <0.3W~0.5W by R.C.
- Global certificates in multi-fields
(ITE 62368-1, Medical 60601-1, Household 60335-1, Industrial 61558-1/2-16/61010-1, Energy converter 62477-1)
- 200% peak power capability(12~60V models)
- High efficiency up to 93%
- -40~85°C wide range operation temperature(> +60°C derating)
- Extremely low leakage current<350µA, 2 x MOPP, suitable for BF medical applications
- Built-in constant current limiting circuit
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design for noise sensitive applications
- Built-in remote ON/OFF control
- Over voltage category III (OVC III)
- Operating altitude up to 5000 meters
- Conformal coating
- 5 years warranty

■ Applications

- Industrial automation machinery/ control system
- Security system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus
- Network equipment
- Telecom devices
- Power sourcing equipment of PoE
- Home automation
- Medical devices

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

The NSP-150 series is a 150W AC/DC power supply with PFC function, designed for high reliability and suitable for multiple industries. Key features include: compact size (129*97*30 mm) for better space utilization in system installations, ultra-wide input range of 85~305Vac for global compatibility, up to 93% efficiency and low standby power consumption (<0.3W~0.5W) for energy-saving and carbon reduction, constant current design with 200% peak power capability, fanless design, wide operating temperature range from -40 to +85°C (+60°C at full load), compliance with OVCIII, built-in Remote Control /Remote Sense/DC OK signal, internal PCB coating, complete protections, certifications for multiple safety standards including 62368-1, 60601-1, 61558-1, 60335-1, 62477-1, and 61010-1, as well as 2 X MOPP compliance and extremely low leakage current (<350µA). It is suitable for BF-rated medical equipment and comes with a 5-years warranty, making it a highly cost-effective solution for industrial power supply needs.

■ Model Encoding

NSP -150 - **24**

Output voltage (5V/7.5V/12V/15V/24V/27V/36V/48V/60V)

Output wattage

Series name




SPECIFICATION		NSP-150-5	NSP-150-7.5	NSP-150-12	NSP-150-15	NSP-150-24	NSP-150-27	NSP-150-36	NSP-150-48	NSP-150-60	
OUTPUT											
DC VOLTAGE	5V	7.5V	12V	15V	24V	27V	36V	48V	60V		
RATED CURRENT	30A	20A	12.5A	10A	6.3A	5.6A	4.2A	3.15A	2.55A		
CURRENT RANGE	0 ~ 30A	0 ~ 20A	0 ~ 12.5A	0 ~ 10A	0 ~ 6.3A	0 ~ 5.6A	0 ~ 4.2A	0 ~ 3.15A	0 ~ 2.55A		
RATED POWER	150W	150W	150W	150W	151.2W	151.2W	151.2W	151.2W	153W		
PEAK	CURRENT(5 sec.)	N/A	N/A	25A	20A	12.5A	11.2A	8.4A	6.3A	5.1A	
	POWER(5 sec.)	N/A	N/A	300W	300W	300W	300W	300W	300W	300W	
RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	240mVp-p	240mVp-p	240mVp-p	300mVp-p		
VOLTAGE ADJ. RANGE	4.7 ~ 5.5V	6.8 ~ 9V	10.8 ~ 14V	15 ~ 19V	21 ~ 26V	26 ~ 32V	32 ~ 43V	44 ~ 57V	54 ~ 72V		
VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
LOAD REGULATION	±1.0%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
SETUP, RISE TIME	1500ms, 80ms/115Vac 1000ms, 80ms/230Vac 1000ms, 80ms/277Vac										
HOLD UP TIME (Typ.)	16ms at full load										
INPUT											
VOLTAGE RANGE Note.4	85 ~ 305Vac 120 ~ 431Vdc										
NO LOAD POWER CONSUMPTION(Typ.)	Remote Power OFF	0.3W/115Vac	0.5W/230Vac	0.5W/277Vac							
	Remote Power ON	3W/115Vac	3W/230Vac	3W/277Vac							
FREQUENCY RANGE	47 ~ 63Hz										
POWER FACTOR (Typ.)	PF>0.98/115Vac, PF>0.93/230Vac, PF>0.9/277Vac at full load										
EFFICIENCY (Typ.)	91%	91.5%	93%	93%	92%	92%	92.5%	92.5%	93%		
AC CURRENT (Typ.)	1.55A/115Vac	0.75A/230Vac	0.63A/277Vac								
INRUSH CURRENT (Typ.)	COLD START 23A/115Vac 45A/230Vac 55A/277Vac										
LEAKAGE CURRENT	Earth leakage current <350µA(rms)@277Vac, touch current<100µA(rms) @ 277Vac										
PROTECTION											
SHORT CIRCUIT	5V	Hiccup mode, recovers automatically after fault condition is removed									
	7.5V-60V	Constant current limiting for more than 5 seconds (Vout<30%) and then shut down o/p voltage, AC re-power on to recover									
OVERLOAD	5V	105%~170% rated Output power; Hiccup mode, recovers automatically after fault condition is removed									
	7.5V	105%~150% rated output power; Constant current limiting for more than 5 seconds and then shut down o/p voltage, AC re-power on to recover									
	12V ~ 60V	Normally works within 105 ~ 200% rated output power for more than 5 seconds and then constant current limiting without shutdown(Vout>30%), recovers automatically after fault condition is removed, or shut down o/p voltage when Vout<30%,AC re-power on to recover									
		>200% rated power, constant current limiting (Vout>30%)with auto-recovery after fault condition is removed, or shut down o/p voltage when Vout<30%,AC re-power on to recover									
OVER VOLTAGE	5.8 ~ 7.5V	9 ~ 13V	15 ~ 19V	20 ~ 25V	28 ~ 36V	33 ~ 42V	44 ~ 54V	58 ~ 70V	73 ~ 86V		
	Protection type : Shut down o/p voltage, re-power on to recover										
OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover										
FUNCTION											
REMOTE CONTROL	POWER ON: RC+~RC- 0~0.8Vdc or open POWER OFF: RC+~RC- 3.3~10Vdc by external voltage										
REMOTE SENSE	Compensate voltage drop on the load wiring up to 0.3V. Please refer to the Function Manual										
DC OK SIGNAL	By phototransistor, contact rating(max.):15Vdc/10mA resistive load. Please refer to the Function Manual.										
ENVIRONMENT											
WORKING TEMP.	-40 ~ +85°C (Refer to "Derating Curve")										
WORKING HUMIDITY	20 ~ 90% RH non-condensing										
STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing										
TEMP. COEFFICIENT	±0.05%/°C (0 ~ 60°C)										
VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes										




SAFETY & EMC (Note 6)						
SAFETY STANDARDS		CB IEC62368-1, IEC60335-1, IEC61558-1/-2-16, IEC61010-1/-2-201, IEC60601-1; IEC62477-1 DEKRA BS EN/EN62368-1, BS EN/EN60335-1, BS EN/EN61558-1/-2-16, BS EN/EN61010-1/-2-201, BS EN/EN60601-1(3.2 Version);BS EN/EN62477-1 UL UL62368-1, ANSI/AAMI ES60601-1(3.2 Version),UL61010-1/-2-201 RCM AS/NES 62368-1, AS/NES61558-1/-2-16 CCC GB4943.1 BSMI CNS15598-1 EAC TP TC 004 approved; KC/BIS KC62368-1 and BIS IS13252 (Part 1): 2010 certified, no stock by request, contact sale for inquires				
ISOLATION RESISTANCE		Primary-Secondary: 2xMOPP, Primary-Earth: 1xMOPP, Secondary-Earth: 1xMOPP				
OVER VOLTAGE CATEGORY		IEC/EN 61558-1/-2-16 (OVC III , altitude up to 2000M) IEC/EN/UL 62368-1 (OVC II , altitude up to 5000M) IEC/EN 60335-1 (OVC II , altitude up to 5000M) IEC/EN 60601-1 (OVC II , altitude up to 4000M) IEC/EN 61010-1/-2-201 (OVC II , altitude up to 5000M) IEC/EN 62477-1 (OVC II , altitude up to 5000M)				
SAFETY EXTRA-LOW VOLTAGE(SELV)		IEC/EN 61558-2-16 (SELV, 5 ~ 36V) IEC/EN 60335-1 (SELV, 5 ~ 36V) IEC/EN/UL 62368-1 (SELV/ES1, 5 ~ 36V)				
WITHSTAND VOLTAGE		I/P-O/P:4.2KVac I/P-FG:2.1KVac O/P-FG:1.5KVac				
ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH				
EMC EMISSION	Parameter	Standard	Test Level / Note			
	Conducted	BS EN/EN55032(CISPR32),CNS 15936	Class B			
		BS EN/EN55014-1(CISPR14-1)				
		BS EN/EN55011(CISPR11)	Class B			
	Radiated	BS EN/EN55032(CISPR32),CNS 15936	Class B			
		BS EN/EN55014-1(CISPR14-1)				
		BS EN/EN55011(CISPR11)	Class B			
	Harmonic Current	BS EN/EN61000-3-2(IEC61000-3-2)	Class A			
	Voltage Flicker	BS EN/EN61000-3-3(IEC61000-3-3)	-----			
BS EN/EN55035(CISPR35),BS EN/EN61000-6-2(IEC61000-6-2),BS EN/EN60601-1-2(IEC60601-1-2), BS EN/EN55014-2(CISPR14-2)						
EMC IMMUNITY	Parameter	Standard	Test Level / Note			
	ESD	BS EN/EN61000-4-2	Level 4, 15KV air ; Level 4, 8KV contact			
	Radiated	BS EN/EN61000-4-3	Level 3, 10V/m(80MHz~2.7GHz) Table 9, 9~28V/m(385MHz~5.78GHz)			
	EFT / Burst	BS EN/EN61000-4-4	Level 3, 2KV			
	Surge	BS EN/EN61000-4-5	Level 4, 2KV/Line-Line 4KV/Line-Earth			
	Conducted	BS EN/EN61000-4-6	Level 3, 10V			
	Magnetic Field	BS EN/EN61000-4-8	Level 4, 30A/m			
	Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
OTHERS						
MTBF	2159.4 K hrs min. Telcordia SR-332 (Bellcore) ; 258. 3 K hrs min. MIL-HDBK-217F (25°C)					
DIMENSION (L*W*H)	129*97*30mm					
PACKING	0.42Kg;30pcs/13.6Kg/0.76 CUFT					
NOTE						
1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor. 3. Tolerance: includes set up tolerance, line regulation and load regulation. 4. Derating may be need under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 5. The ambient temperature derating of 3.5°C/1000m with fanless models and 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf) 7. RCM is on voluntary basis and meets relevant IEC or AS/NZS standards complying with AS/NZS 4417.1. ※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx						

■ Block Diagram

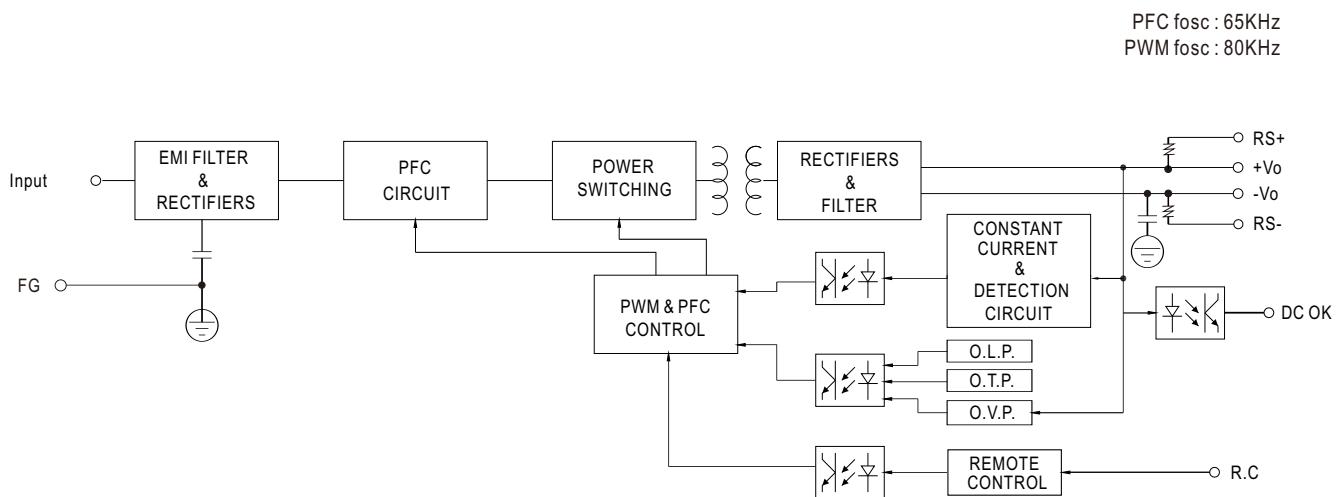


■ Derating Curve

Suitable for 100/110/115/120Vac System
(85~135Vac)

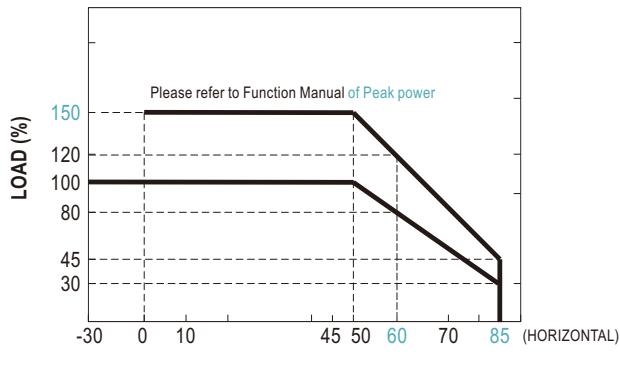


Suitable for 220/230/240/277Vac System
(180~305Vac)

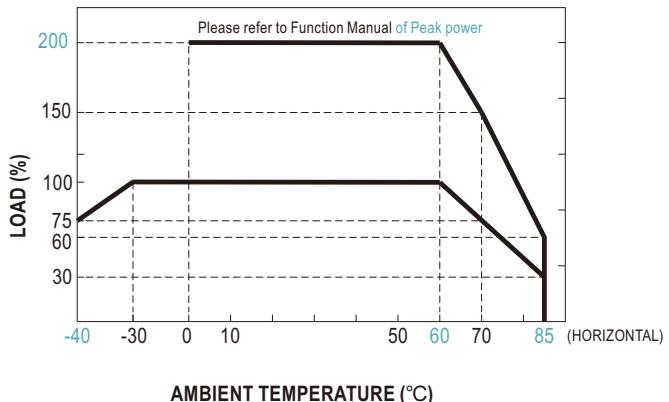

Note: Below 100Vac @-30°C there may be a restart situation within 3 seconds after power-on.

■ Output Derating vs Input Voltage

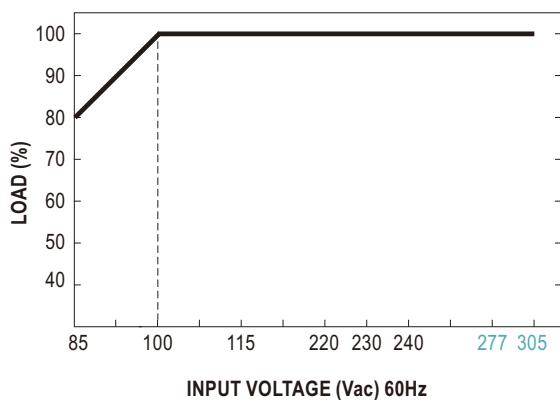



■ Function Manual

1. Peak Power

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$\text{Duty} = \frac{t}{T} \times 100\% \leq 35\%$$

$t \leq 5 \text{ sec}$

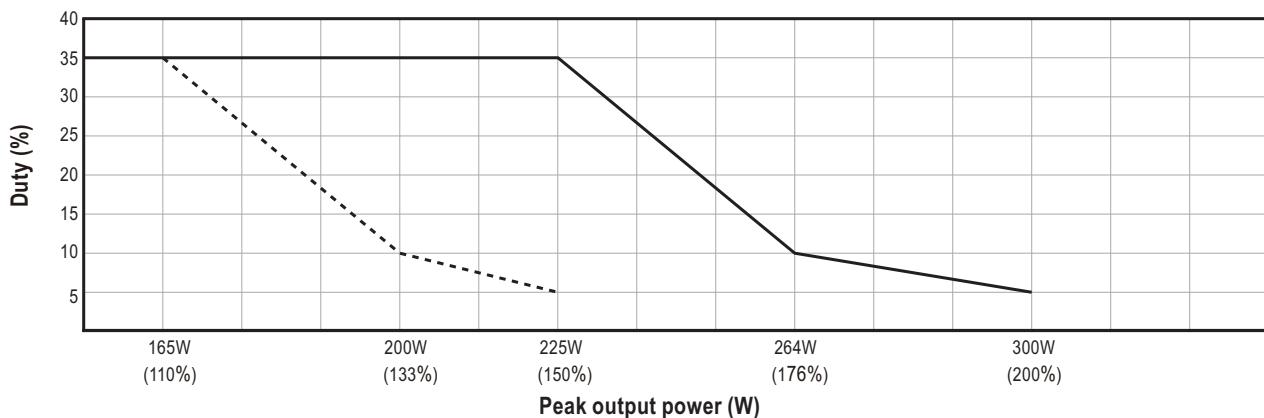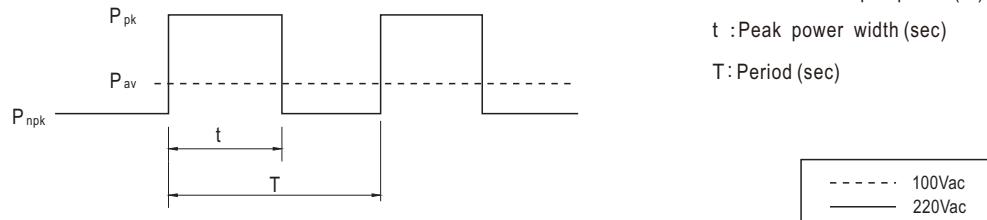

For example (24V model) :

$V_{in} = 200\text{Vac}$ Duty_max = 5%

$$P_{av} = P_{rated} = 150\text{W}$$

$$P_{pk} = 300\text{W}$$

$t \leq 5 \text{ sec}$

$$T \geq \frac{5 \text{ sec}}{5\%} \geq 100\text{sec}$$

$$P_{npk} \leq \frac{TP_{av} - tP_{pk}}{T-t}$$



$$P_{npk} \leq 142\text{W}$$

Note: When the output voltage is adjusted to the upper limit, the peak power is 150% rated power

2. Remote Control



The PSU can be turned ON/OFF by using the "Remote Control" function with external switch and auxiliary power

PSU Vo Status	Between RC-(pin1) and RC+(pin2) on CN1
POWER ON	SW open or keep 0~0.8Vdc
POWER OFF	SW short or keep 3.3~10Vdc

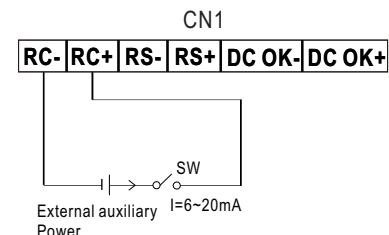

3. Remote Sense


The remote sensing compensates voltage drop on the load wiring up to 0.3Vdc

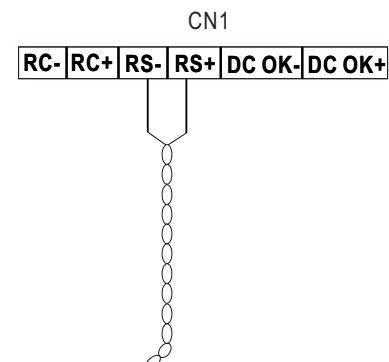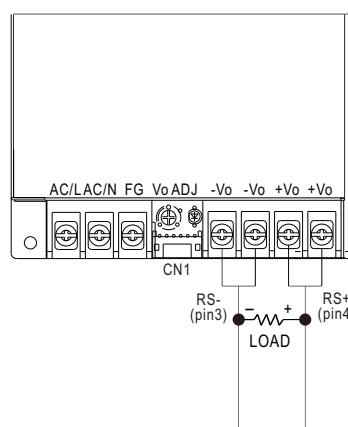

Sense lines should be twisted in pairs

4. DC_OK signal


※ DC_OK is a collector shorted signal. It is used by an optocoupler in the power supply which indicates the output status of the power supply as exhibited below.

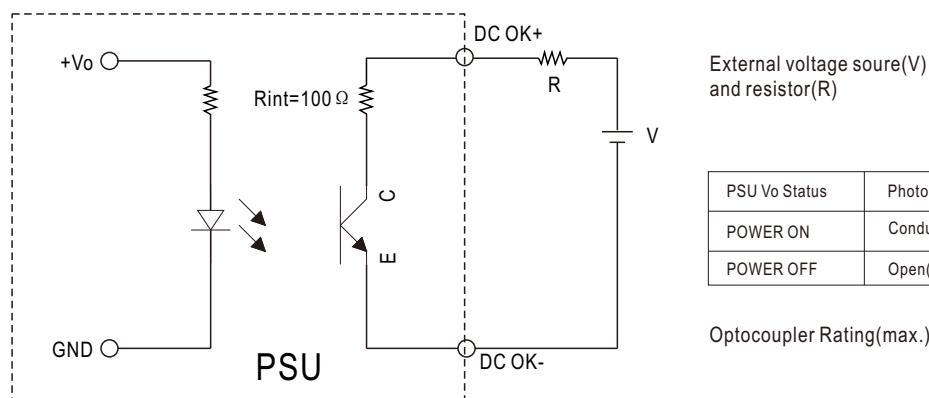

PSU Vo Status	Photo transistor
POWER ON	Conduct(Low impedance)
POWER OFF	Open(High impedance)

Optocoupler Rating(max.) 15Vdc/10mA resistive load

■ Mechanical Specification

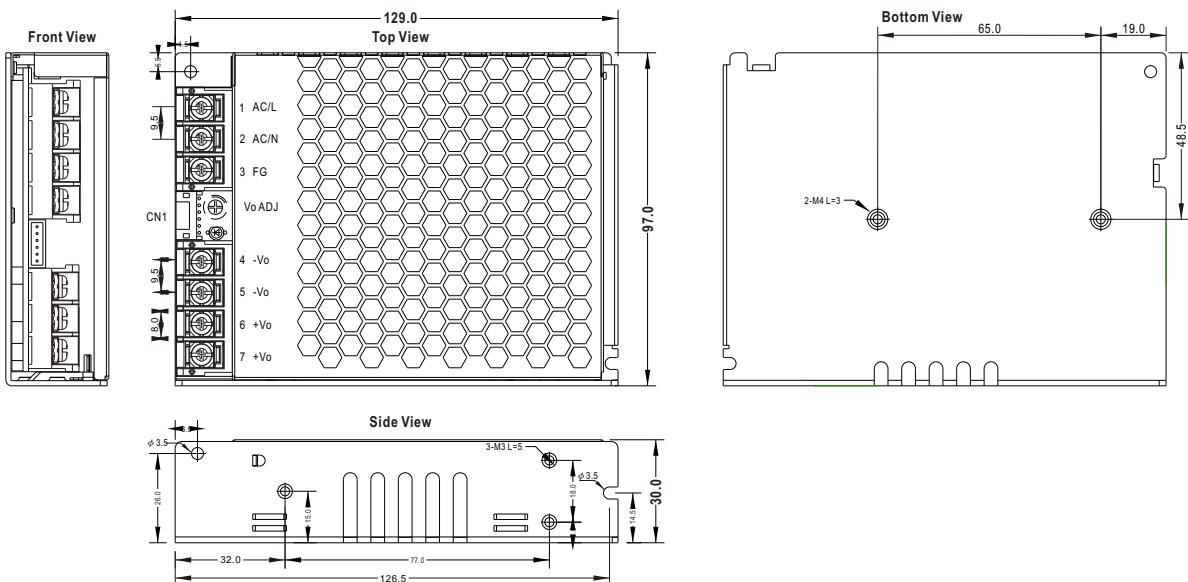 Case No.308A Unit:mm Tolerance: ± 1


※ Input Terminal Pin No. Assignment

Pin No.	Assignment	Diagram	Screw thread	Mounting torque
1	AC/L or DC input +Vin			
2	AC/N or DC input -Vin			
3	FG \pm		M3.5	8~10Kgf.cm

※ DC Output Terminal Pin No. Assignment

Pin No.	Assignment	Diagram	Screw thread	Mounting torque
4,5	-Vo			
6,7	+Vo		M3.5	8~10Kgf.cm

Connector Pin No. Assignment (CN1): DJS-1125R-06 or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	RC-	JS-11242-06 or equivalent	DJS-1125R-06 or equivalent
2	RC+		
3	RS-		
4	RS+		
5	DC OK-		
6	DC OK+		

■ Accessory List

No.	Item	Quantity
1	Control function interface(CN1) mating wire along with NSP-150 (standard accessory)	1pcs/per model
2	Terminal cover MW'S Order NO. :PEE4TBC-03 (By request accessory, should ordered separately)	1pcs/per model
3	Terminal cover MW'S Order NO. :PEE4TBC-04 (By request accessory, should ordered separately)	1pcs/per model

■ Installation Manual

 Please refer to : <http://www.meanwell.com/manual.html>