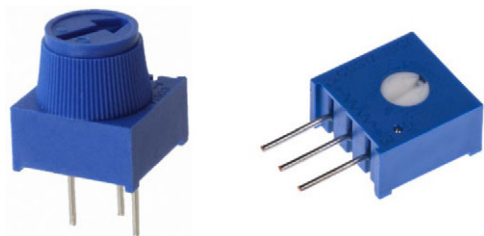


3/8" Square Single-Turn Cermet Trimmer



FEATURES

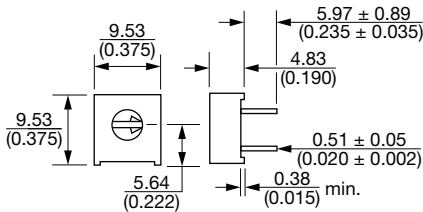






- Industrial grade
- Wide ohmic range (10 Ω to 2 M Ω)
- Top and side adjust styles
- Easy to set with knob option (finger adjust)
- Available with extended shaft
- Available with cross-slot rotor
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

LINKS TO ADDITIONAL RESOURCES

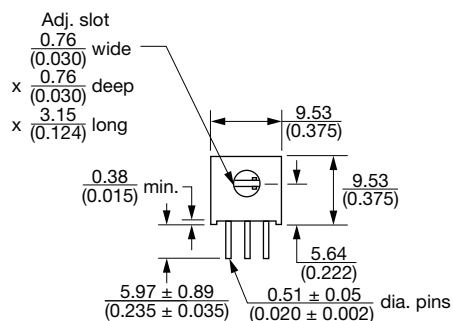



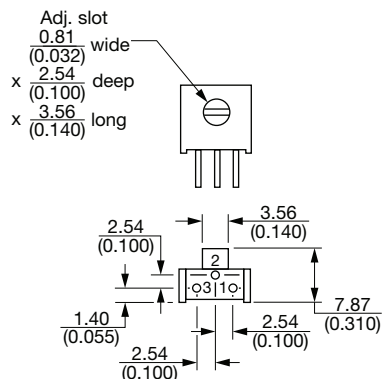

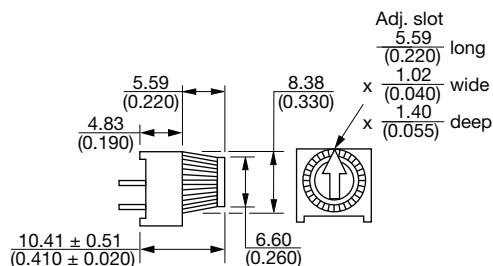


The M61 trimming potentiometer is available in several pin configurations for top or side adjustment and with a choice of knob styles for finger setting.

DIMENSIONS in millimeters (± 0.5 mm)	
TOP ADJUST: STYLE F, G, K, P, R, U, V, Y	
COMMON DIMENSIONS	
	
M61F 	M61G 
M61K 	M61P 
M61R 	M61U 

DIMENSIONS in millimeters (± 0.5 mm)	
M61V	M61Y
TOP ADJUST: STYLE M, T COMMON DIMENSIONS	
M61M	M61T
SIDE ADJUST: STYLE B, C, J, X COMMON DIMENSIONS	
M61B	M61C
M61J	M61X

DIMENSIONS in millimeters (± 0.5 mm)

SIDE ADJUST: STYLE H, S, W
COMMON DIMENSIONS

M61H

M61S

M61W

LONG SHAFT OPTION: T614
TOP AND SIDE ADJUST: STYLE H, X, P
M61H.....T614, M61X.....T614

M61P.....T614

KNOB OPTION (1): T607
TOP ADJUST: STYLE F, P, X

Note

(1) Knob option not recommended for side load applications

**ELECTRICAL SPECIFICATIONS**

Resistive element	Cermet
Electrical travel	280° nom.
Resistance range	10 Ω to 2 M Ω (see "Standard Resistance Element Data" table)
Standard series	1 - 2 - 5
Tolerance standard	$\pm 10\%$
Circuit diagram	
Power rating	linear
	0.5 W at +85 °C 0 W at +125 °C
Temperature coefficient	± 100 ppm
Limiting element voltage	300 V _{max.}
Voltage divider adjustability	$\pm 0.05\%$
Rheostat adjustability	$\pm 0.15\%$
Contact resistance variation	2 % or 3 Ω max. (whichever is greater)
End resistance (typical)	2 Ω max.
Dielectric strength	900 V _{AC}
Insulation resistance	1000 M Ω min. at 500 V _{DC}

MECHANICAL SPECIFICATIONS

Mechanical travel	310 mon.
Operating torque (max. Ncm)	3.5
Unit weight (typical)	0.85 g
Wiper (actual travel)	Positioned at approximately 50 %
Terminals	Pure Sn (code e3)

ENVIRONMENTAL SPECIFICATIONS

Temperature range	-55 °C to +125 °C
-------------------	-------------------

PERFORMANCES

TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS
Load life	1000 h at rated power, ambient temperature +85 °C	Total resistance shift = $\pm 3\%$ Contact resistance variation = 3 Ω or $\pm 3\%$ whichever is greater
Humidity	MIL-STD-202 method 103 96 hours	Total resistance shift = $\pm 2\%$ Insulation resistance = 10 M Ω
Rotational cycling	200 cycles	Total resistance shift = $\pm 4\%$ Contact resistance variation = 3 Ω or $\pm 3\%$ whichever is greater
Shock	100 g	Total resistance shift = $\pm 1\%$ Voltage resistance shift = $\pm 1\%$
Vibration	30 g	Total resistance shift = $\pm 1\%$ Voltage resistance shift = $\pm 1\%$

Note

- Nothing stated herein shall be construed as a guarantee of quality or durability

**STANDARD RESISTANCE**

RESISTANCE (Ω)	RESISTANCE CODE
10	100
20	200
50	500
100	101
200	201
500	501
1000	102
2000	202
5000	502
10 000	103
20 000	203
25 000	253
50 000	503
100 000	104
200 000	204
250 000	254
500 000	504
1 000 000	105
2 000 000	205

MARKING

- Vishay trademark
- Model
- Ohmic value
- Manufacturing date

PACKAGING

In tube of 50 pieces code T20 (TU50)

ORDERING INFORMATION (part number)

M	6	1	Y	1	0	3	K	T	2	0	T	6	0	7
MODEL	STYLE			OHMIC VALUE			TOLERANCE		PACKAGING		SPECIAL NUMBER			
M61	B, C, E, G, H, J, K, M, P, R, S, T, U, V, W, X, Y			From 10 Ω to 2 M Ω 103 = 10 k Ω			K = $\pm 10\%$		T20 = tube 50 pieces		(If applicable) T614 = long shaft option T607 = knob option ⁽¹⁾			

Note⁽¹⁾ Not recommended for side load application**DESCRIPTION** (for information only)

M61	Y	10K	10 %	T607	T20	e3
MODEL	STYLE	VALUE	TOLERANCE	SPECIAL	PACKAGING	LEAD (Pb)-FREE

RELATED DOCUMENTS**APPLICATION NOTES**

Potentiometers and Trimmers	www.vishay.com/doc?51001
Guidelines for Vishay Sfernice Resistive and Inductive Components	www.vishay.com/doc?52029

ACCESSORIES

Screwdrivers (to order separately)	www.vishay.com/doc?57015
------------------------------------	--



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.