

Ultra High Power Thick Film (SP Series)



厚聲集團

Alternative for:

Bourns CHP

Vishay RCP



Features:

- High Power Rating up to 6W
- Surge Withstanding Capability
- AEC-Q200 Compliant
- Suitable for both wave & reflow soldering
- SP12 available in KIT packaging (E-24)
- Product design patent # : I566261



Application:

- EV Charging system
- Lighting converter/beacon
- Automotive
- Consumer electronics
- LCD back light
- Power supply/tools
- Medical
- Battery Chargers/BMS
- Telecom Equipment

- Digital Cameras
- Computer & Wi Fi modules
- Warning System & Security
- Relay
- Inverter



IATF 16949
ISO 14001




Ultra High Power Thick Film (SP Series)



Power Rate Comparison


Power (70°C)			
Size	Standard	HP	SP
0402	1/16W	1/10W	-
0603	1/10W	1/5W	-
0805	1/8W	1/3W	-
1206	1/4W	1/2W	-
2010	3/4W	1W	2W
2512	1W	2W	3W
2817	-	-	4W
4320	-	-	5W
4527	-	-	6W

**SP series value range 1%, 5% 1R-10M

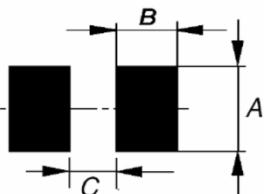


Recommended Solder Pad

Size	Dimension(mm)		
	A	B	C
SP10	3.00	2.00	3.90
SP12	3.70	2.80	2.70
SP17	4.70	3.30	3.40
SP20	5.50	3.90	6.10
SP27	7.20	4.00	6.50

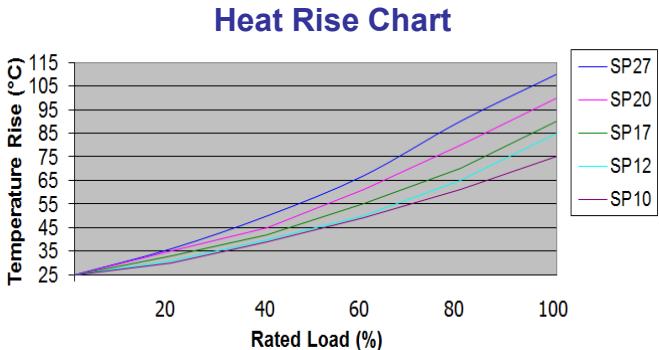

Surge Performance

SP Series 1.2/50us Lightning Surge

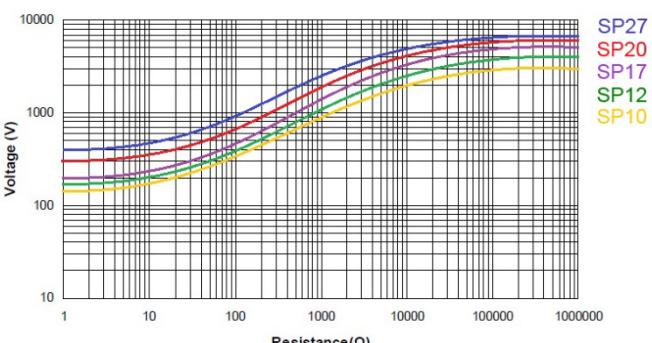

4 Layer PCB specification:

- 1) Outside 2 layers (Top and Bottom) with copper foil thickness at 2oz.
- 2) Inside 2 layers (middle layers) with copper foil thickness at 4oz.



IATF 16949
ISO 14001

This document is a general reference only
Any inquiry/technical support pls. send
email to your contact sales.

Legal Disclaimer



The information provided in the catalog/data sheet /single pages/short form is for the purpose of describing product specifications only, and ROYALOHM and its affiliates (hereinafter collectively referred to as "ROYALOHM") hereby disclaim any liability for any errors, inaccuracies or incompleteness contained in any product-related information (including but not limited to product specifications, datasheets, pictures, graphics). ROYALOHM reserves the right to modify this content without prior notice. Thank you for your understanding.

ROYALOHM makes no representation, warranty, and guarantee as to the fitness of its products for any particular purpose or the continuing production of any ROYALOHM products.

To the maximum extent permitted by law, ROYALOHM disclaims

- I. any and all liability arising out of the application or use of any ROYALOHM product,
- II. any and all liability, including without limitation special, consequential or incidental damages, and
- III. any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

ROYALOHM products are not intended for use in medical, life-saving, or life-sustaining equipment, nor are they intended for any other purpose where product failure or mismanagement could endanger life or cause harm to or death to the human body.

Customers use or sell ROYALOHM products for the above purposes at their own risk. If need products for such purposes, please be sure to consult with our company to obtain relevant information about the applicable products.

Regardless of the application of ROYALOHM products, it is recommended to carry out safety tests while using measures such as protective circuits and redundant circuits to protect the safety of equipment.



IATF 16949
ISO 14001

This document is a general reference only
Any inquiry/technical support pls. send
email to your contact sales.