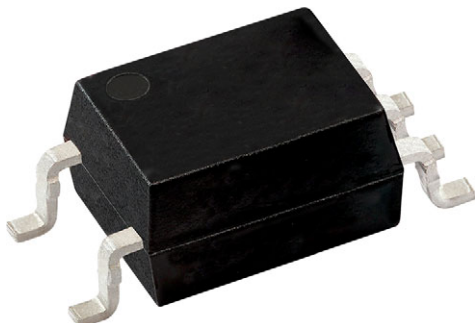


Automotive High Speed Coupler, High Noise Immunity, 1 MBd, SOP-5 Package



DESCRIPTION

The VOMHA43A is the automotive high speed optocoupler, consists of a GaAlAs infrared emitting diode, optically coupled with an integrated photo detector and a high speed transistor. The photo detector is junction isolated from the transistor to reduce miller capacitance effects. The open collector output function allows circuit designers to adjust the load conditions when interfacing with different logic systems such as TTL, CMOS, etc.

Because the VOMHA43A has a Faraday shield on the detector chip, it can also reject and minimize high input to output common mode transient voltages.


The VOMHA43A, ideal solution for automotive communication bus isolation, for CAN, LIN, I2C or SPI, as well as isolated drive circuit applications such as IPM (intelligent power module) drivers.

FEATURES

- AEC-Q102 automotive qualified
- -40 °C to +125 °C wide temperature range
- Very high common mode transient immunity of 50 000 V/μs
- Open collector output
- Material categorization:
for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE



APPLICATIONS

- Automotive communication bus interface (CAN, LIN, I2C, SPI)
- Automotive IPM driver
- Ground signal isolation
- Logic voltage level translation

AGENCY APPROVALS

- UL1577 (pending)
- cUL (pending)
- CQC (pending)
- DIN EN 60747-5-5 (VDE 0884-5) available with option 1 (pending)

ORDERING INFORMATION

V O M H A 4 3 - X 0 0 # T PART NUMBER PACKAGE OPTION TAPE AND REEL												
AGENCY CERTIFIED / PACKAGE												
UL, cUL, CQC												
SOP-5		VOMHA43AT										
UL, cUL, CQC, VDE (option 1)												
SOP-5		VOMHA43A-X001T										

Note

- The product is available only on tape and reel

ABSOLUTE MAXIMUM RATINGS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
INPUT				
Reverse voltage		V_R	7	V
DC forward current		I_F	30	mA
Surge forward current	$t_p \leq 1\text{ }\mu\text{s}$, 300 pulses/s	I_{FSM}	1	A
Power dissipation	$T_{amb} \leq 70\text{ }^{\circ}\text{C}$	P_{diss}	80	mW
OUTPUT				
Supply voltage		V_S	-0.5 to +30	V
Output voltage		V_O	-0.5 to +20	V
Output current		I_O	8	mA
Power dissipation	$T_{amb} \leq 70\text{ }^{\circ}\text{C}$	P_{diss}	100	mW
COUPLER				
Storage temperature range		T_{stg}	-55 to +150	$^{\circ}\text{C}$
Ambient temperature range		T_{amb}	-40 to +125	$^{\circ}\text{C}$
Junction temperature		T_J	140	$^{\circ}\text{C}$
Soldering temperature ⁽¹⁾	$t < 10\text{ s max.}$		260	$^{\circ}\text{C}$

Notes

- Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.

⁽¹⁾ Refer to reflow profile for soldering conditions for surface mounted devices (SMD). Refer to wave profile for soldering conditions for through-hole devices (DIP).

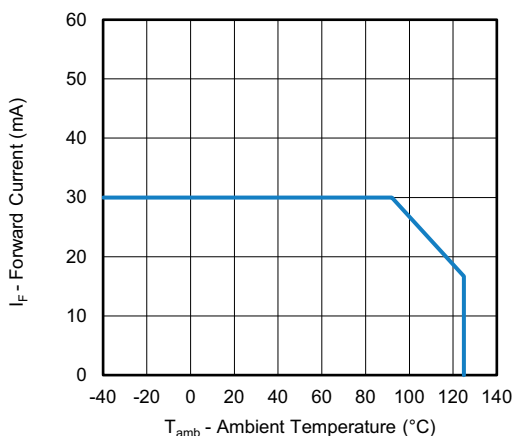


Fig. 1 - Forward Current vs. Ambient Temperature

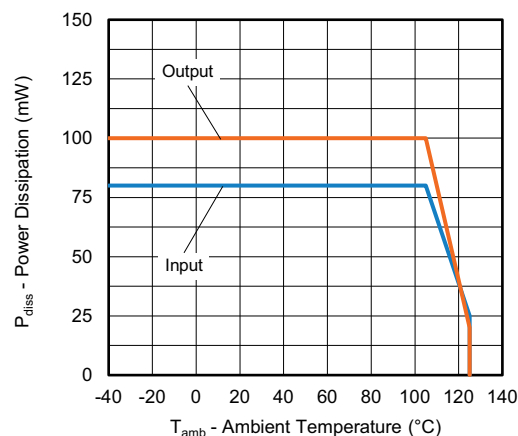


Fig. 2 - Power Dissipation vs. Ambient Temperature



ELECTRICAL CHARACTERISTICS (T _{amb} = -40 °C to +125 °C, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
INPUT						
Input forward voltage	I _F = 10 mA	V _F	1.1	-	1.7	V
	I _F = 10 mA, T _{amb} = 25 °C		1.2	1.38	1.6	
Input reverse current	V _R = 5 V	I _R	-	0.001	10	μA
Input capacitance	f = 1 MHz, V _F = 0 V, T _{amb} = 25 °C	C _{IN}	-	30	-	pF
Temperature coefficient of forward voltage	I _F = 1.5 mA	ΔV _F /ΔT _{amb}	-	-1.4	-	mV/°C
	I _F = 10 mA		-	-0.9	-	
OUTPUT						
Logic low supply current	I _F = 10 mA, V _O = open, V _{CC} = 20 V	I _{CCL}	-	350	650	μA
	I _F = 1.5 mA, V _O = open, V _{CC} = 20 V	I _{CCL}	-	50	-	μA
Logic high supply current	I _F = 0 mA, V _O = open, V _{CC} = 20 V, T _{amb} = 25 °C	I _{CCH}	-	0.01	1	μA
	I _F = 0 mA, V _O = open, V _{CC} = 20 V	I _{CCH}	-	0.01	2.5	μA
Logic low output voltage	I _F = 10 mA, V _{CC} = 4.5 V, I _O = 2.4 mA	V _{OL}	-	0.1	0.5	V
	I _F = 1.5 mA, V _{CC} = 4.5 V, I _O = 0.5 mA	V _{OL}	-	0.1	-	V
	I _F = 0.8 mA, V _{CC} = 4.5 V, I _O = 0.2 mA	V _{OL}	-	0.1	-	V
Logic high output current	I _F = 0 mA, V _O = V _{CC} = 5.5 V, T _{amb} = 25 °C	I _{OH}	-	0.1	0.5	μA
	I _F = 0 mA, V _O = V _{CC} = 20 V	I _{OH}	-	0.1	5	μA
COUPLER						
Capacitance (input-output) ⁽¹⁾	f = 1 MHz, T _{amb} = 25 °C	C _{IO}	-	0.4	-	pF

Notes

- Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluation. Typical values are for information only and are not part of the testing requirements. All typical values are measured at $T_{amb} = 25\text{ }^{\circ}\text{C}$.

⁽¹⁾ A 0.1 μF bypass capacitor connected between pins 4 and 6 is recommended.

CURRENT TRANSFER RATIO ($T_{amb} = -40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Current transfer ratio ⁽¹⁾⁽²⁾	$V_{CC} = 4.5\text{ V}$, $V_O = 0.4\text{ V}$, $I_F = 10\text{ mA}$, $T_{amb} = 25\text{ }^{\circ}\text{C}$	CTR	32	85	100	%
	$V_{CC} = 4.5\text{ V}$, $V_O = 0.4\text{ V}$, $I_F = 10\text{ mA}$		24	85	-	
	$V_{CC} = 4.5\text{ V}$, $V_O = 0.4\text{ V}$, $I_F = 1.5\text{ mA}$		33	105	-	
	$V_{CC} = 4.5\text{ V}$, $V_O = 0.4\text{ V}$, $I_F = 0.8\text{ mA}$		25	92	-	

Notes

⁽¹⁾ Current transfer ratio in percent equals the ratio of output collector current (I_O) to the forward LED input current (I_F) times 100.

⁽²⁾ A 0.1 μF bypass capacitor connected between pins 4 and 6 is recommended. All typical values are measured at $T_{amb} = 25\text{ }^{\circ}\text{C}$.

SWITCHING CHARACTERISTICS ($T_{amb} = -40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Propagation delay time to logic low at output (see fig. 1) ⁽¹⁾	$V_{CC} = 5\text{ V}$, $I_F = 10\text{ mA}$, $R_L = 1.9\text{ k}\Omega$, $T_{amb} = 25\text{ }^{\circ}\text{C}$	t_{PHL}	0.07	0.11	0.8	μs
	$V_{CC} = 5\text{ V}$, $I_F = 10\text{ mA}$, $R_L = 1.9\text{ k}\Omega$		0.06	-	1	μs
	$V_{CC} = 5\text{ V}$, $I_F = 1.5\text{ mA}$, $R_L = 10\text{ k}\Omega$		-	0.7	5	μs
	$V_{CC} = 5\text{ V}$, $I_F = 0.8\text{ mA}$, $R_L = 27\text{ k}\Omega$		-	1.1	10	μs
Propagation delay time to logic high at output (see fig. 1) ⁽¹⁾	$V_{CC} = 5\text{ V}$, $I_F = 10\text{ mA}$, $R_L = 1.9\text{ k}\Omega$, $T_{amb} = 25\text{ }^{\circ}\text{C}$	t_{PLH}	0.15	0.25	0.8	μs
	$V_{CC} = 5\text{ V}$, $I_F = 10\text{ mA}$, $R_L = 1.9\text{ k}\Omega$		0.03	0.25	1	μs
	$V_{CC} = 5\text{ V}$, $I_F = 1.5\text{ mA}$, $R_L = 10\text{ k}\Omega$		-	0.9	5	μs
	$V_{CC} = 5\text{ V}$, $I_F = 0.8\text{ mA}$, $R_L = 27\text{ k}\Omega$		-	2.1	10	μs
Pulse width distortion	$V_{CC} = 5.0\text{ V}$, $I_F = 10\text{ mA}$, $R_L = 1.9\text{ k}\Omega$, $T_{amb} = 25\text{ }^{\circ}\text{C}$	PWD	-	0.15	0.45	μs
	$V_{CC} = 5.0\text{ V}$, $I_F = 10\text{ mA}$, $R_L = 1.9\text{ k}\Omega$		-	0.15	0.85	μs
Propagation delay difference between any 2 parts	$V_{CC} = 5.0\text{ V}$, $I_F = 10\text{ mA}$, $R_L = 1.9\text{ k}\Omega$, $T_{amb} = 25\text{ }^{\circ}\text{C}$	PDD	-	0.3	0.5	μs
	$V_{CC} = 5.0\text{ V}$, $I_F = 10\text{ mA}$, $R_L = 1.9\text{ k}\Omega$		-	0.3	0.9	μs

Note

⁽¹⁾ The 1.9 k Ω load represents 1 TTL unit load of 1.6 mA and the 5.6 k Ω pull-up resistor. All typical values are measured at $T_{amb} = 25\text{ }^{\circ}\text{C}$.

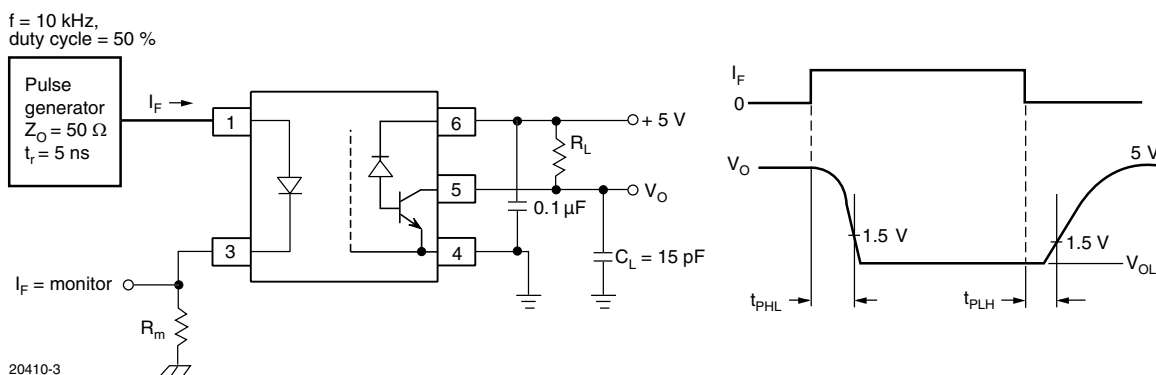


Fig. 3 - Test Circuit for Switching Times

COMMON MODE TRANSIENT IMMUNITY ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Common mode transient immunity at logic high level output (see fig. 2 and notes 1, and 2)	$R_L = 1.9\text{ k}\Omega$, $I_F = 0\text{ mA}$, $V_{CM} = 1500\text{ V}_{P-P}$	$ CM_H $	40 000	50 000	-	$\text{V}/\mu\text{s}$
Common mode transient immunity at logic low level output (see fig. 2 and notes 1, and 2)	$R_L = 1.9\text{ k}\Omega$, $I_F = 10\text{ mA}$, $V_{CM} = 1500\text{ V}_{P-P}$	$ CM_L $	40 000	50 000	-	$\text{V}/\mu\text{s}$
Common mode transient immunity at logic high level output (see fig. 2 and notes 1, and 2)	$R_L = 10\text{ k}\Omega$, $I_F = 0\text{ mA}$, $V_{CM} = 1500\text{ V}_{P-P}$	$ CM_H $	-	10 000	-	$\text{V}/\mu\text{s}$
Common mode transient immunity at logic low level output (see fig. 2 and notes 1, and 2)	$R_L = 10\text{ k}\Omega$, $I_F = 1.5\text{ mA}$, $V_{CM} = 1500\text{ V}_{P-P}$	$ CM_L $	-	10 000	-	$\text{V}/\mu\text{s}$

Notes

- ⁽¹⁾ Common mode transient immunity in a logic high level is the maximum tolerable (positive) dV_{CM}/dt on the leading edge of the common mode pulse (V_{CM}) to assure that the output will remain in a logic high state (i.e., $V_O > 2\text{ V}$). Common mode transient immunity in a logic low level is the maximum tolerable (negative) dV_{CM}/dt on the trailing edge of the common mode pulse signal (V_{CM}) to assure that the output will remain in logic low state, i.e., $V_O > 0.8\text{ V}$.
- ⁽²⁾ The 1.9 k Ω load represents 1 TTL unit load of 1.6 mA and the 5.6 k Ω pull-up resistor.

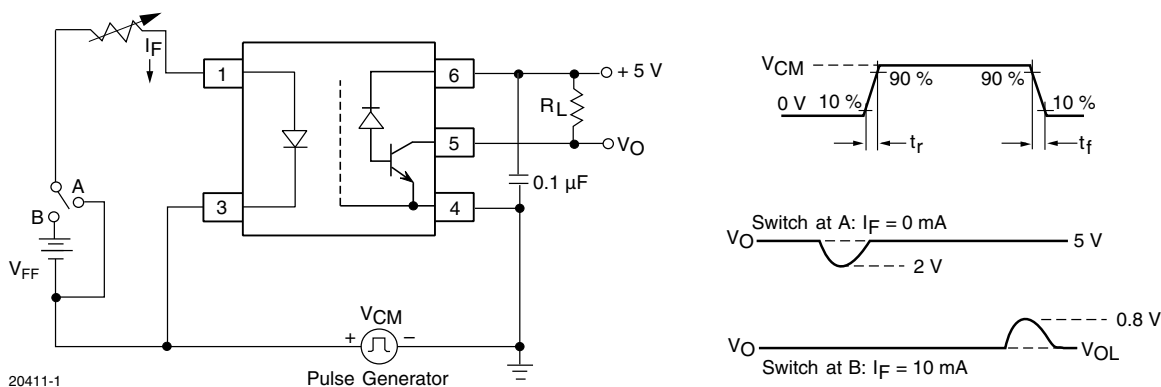


Fig. 4 - Test Circuit for Transient Immunity and Typical Waveforms

SAFETY AND INSULATION RATINGS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Climatic classification	According to IEC 68 part 1		40 / 125 / 21	
Pollution degree	According to DIN VDE 0109		2	
Comparative tracking index	Insulation group IIIa	CTI	400	
Maximum rated withstanding isolation voltage	According to UL1577, $t = 1\text{ min}$	V_{ISO}	4000	V_{RMS}
Maximum transient isolation voltage	According to DIN EN 60747-5-5	V_{IOTM}	6000	V_{peak}
Maximum repetitive peak isolation voltage	According to DIN EN 60747-5-5	V_{IORM}	707	V_{peak}
Isolation resistance	$T_{amb} = 25\text{ }^{\circ}\text{C}$, $V_{IO} = 500\text{ V}$	R_{IO}	$\geq 10^{12}$	Ω
	$T_{amb} = 100\text{ }^{\circ}\text{C}$, $V_{IO} = 500\text{ V}$	R_{IO}	$\geq 10^{11}$	Ω
Output safety power		P_{SO}	350	mW
Input safety current		I_{SI}	150	mA
Input safety temperature		T_S	175	$^{\circ}\text{C}$
Creepage distance			≥ 5	mm
Clearance distance			≥ 5	mm
Insulation thickness		DTI	≥ 0.4	mm

Note

- As per IEC 60747-5-5, § 7.4.3.8.2, this optocoupler is suitable for “safe electrical insulation” only within the safety ratings. Compliance with the safety ratings shall be ensured by means of protective circuits.

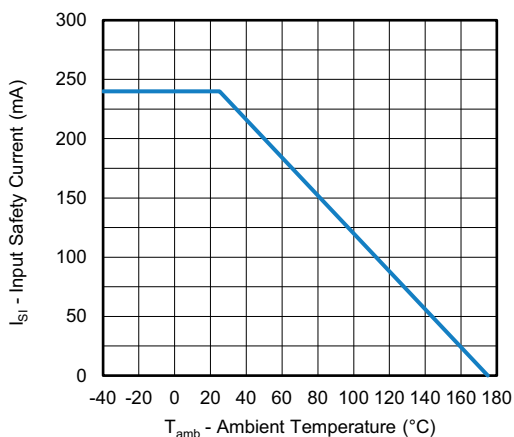


Fig. 5 - Input Safety Current vs. Ambient Temperature

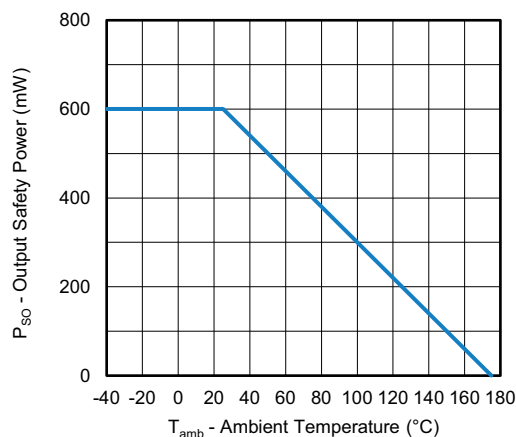


Fig. 6 - Output Safety Power vs. Ambient Temperature

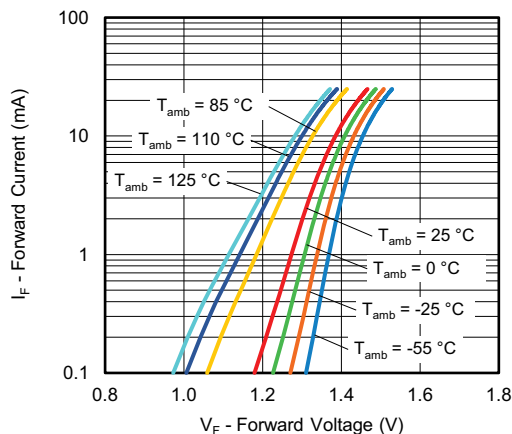
TYPICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)


Fig. 7 - Forward Current vs. Forward Voltage

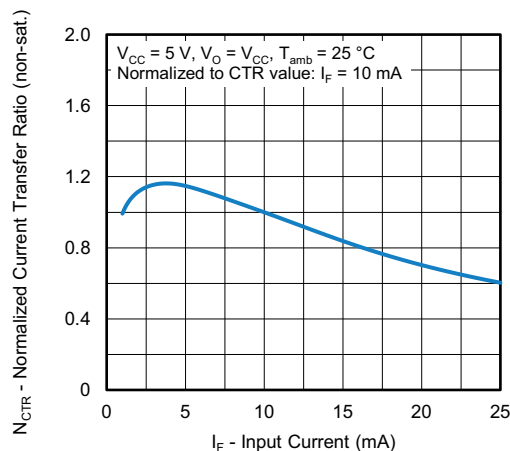


Fig. 10 - Normalized Current Transfer Ratio (non-saturated) vs. Input Current

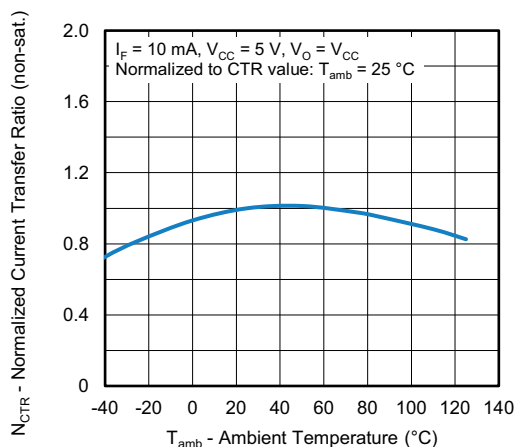


Fig. 8 - Normalized Current Transfer Ratio (non-saturated) vs. Ambient Temperature

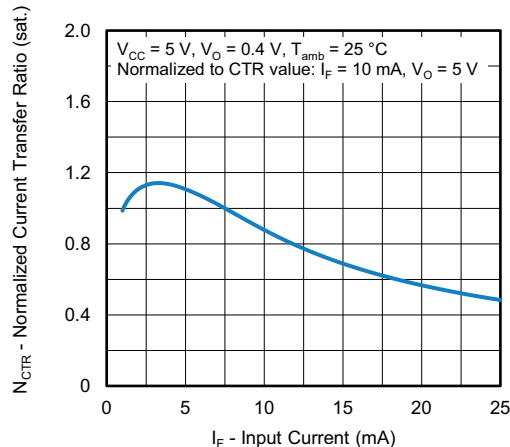


Fig. 11 - Normalized Current Transfer Ratio (non-saturated) vs. Input Current

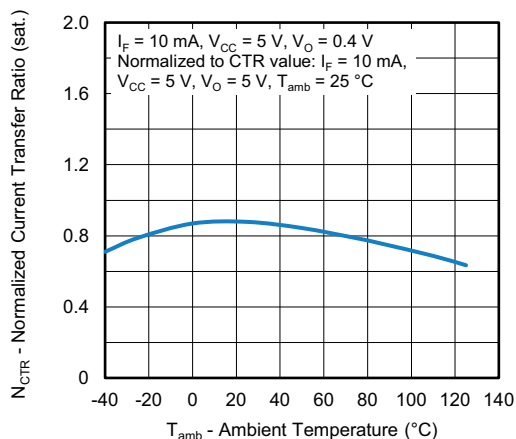


Fig. 9 - Normalized Current Transfer Ratio (saturated) vs. Ambient Temperature

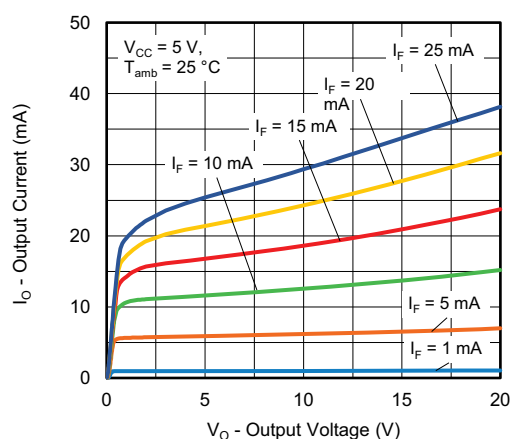


Fig. 12 - Output Current vs. Output Voltage

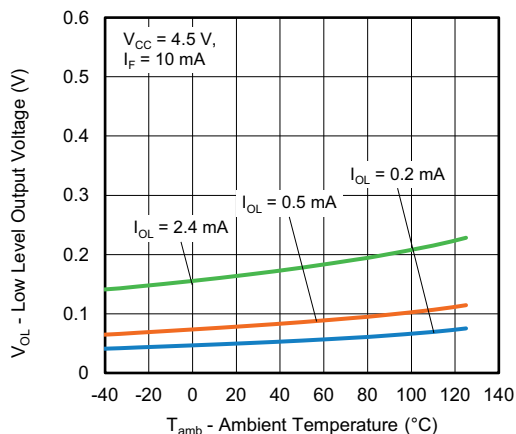


Fig. 13 - Low Level Output Voltage vs. Ambient Temperature

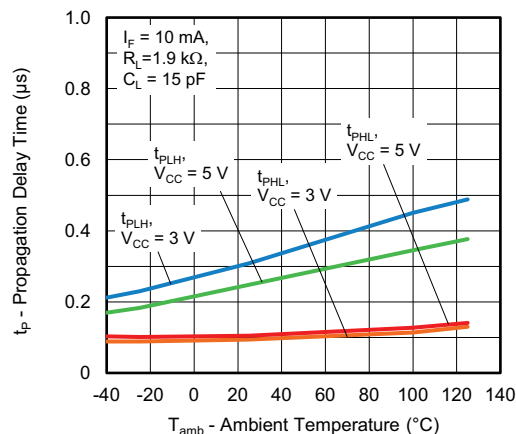


Fig. 16 - Propagation Delay Time vs. Ambient Temperature

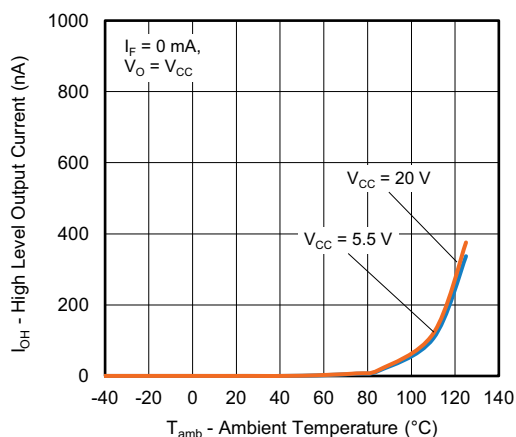


Fig. 14 - High Level Output Current vs. Ambient Temperature

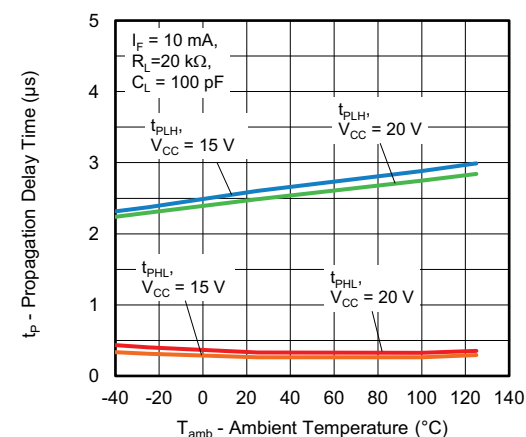


Fig. 17 - Propagation Delay Time vs. Ambient Temperature

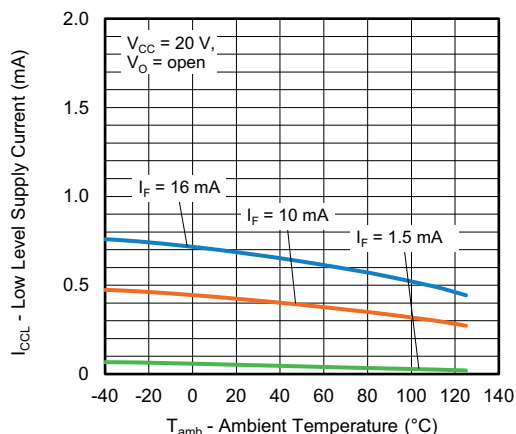


Fig. 15 - Low Level Supply Current vs. Ambient Temperature

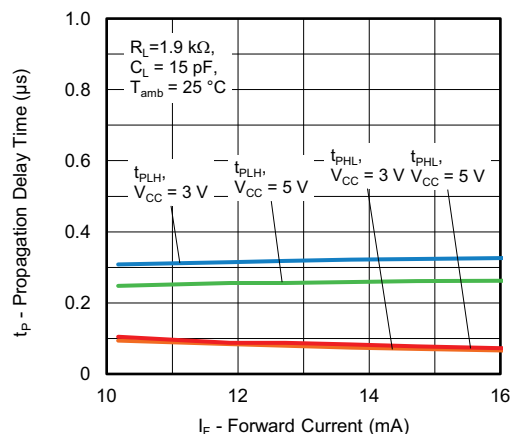


Fig. 18 - Propagation Delay Time vs. Forward Current

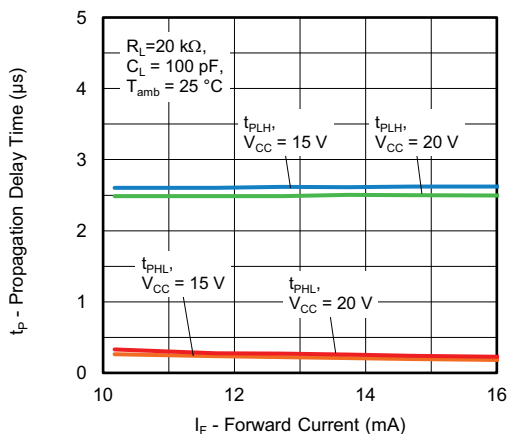


Fig. 19 - Propagation Delay Time vs. Forward Current

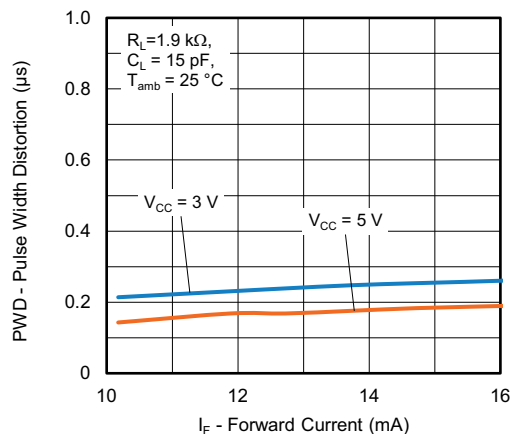


Fig. 22 - Pulse Width Distortion vs. Forward Current

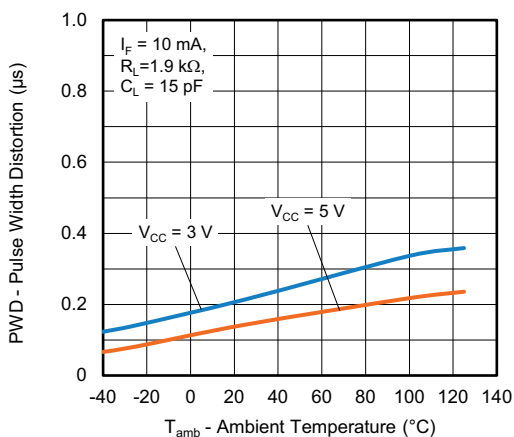


Fig. 20 - Pulse Width Distortion vs. Ambient Temperature

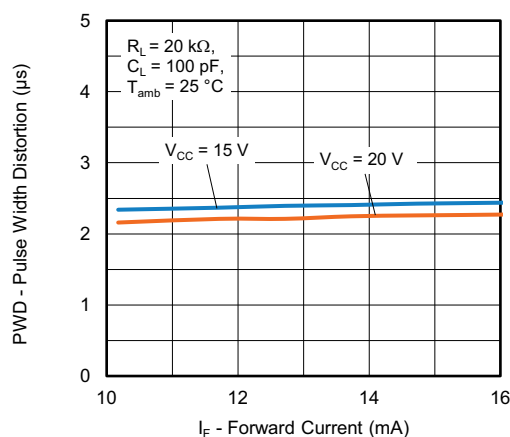


Fig. 23 - Pulse Width Distortion vs. Forward Current

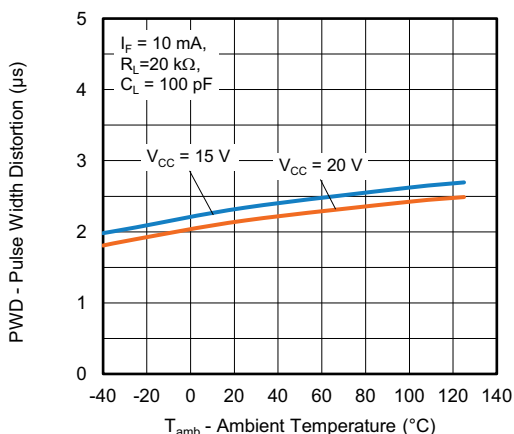


Fig. 21 - Pulse Width Distortion vs. Ambient Temperature

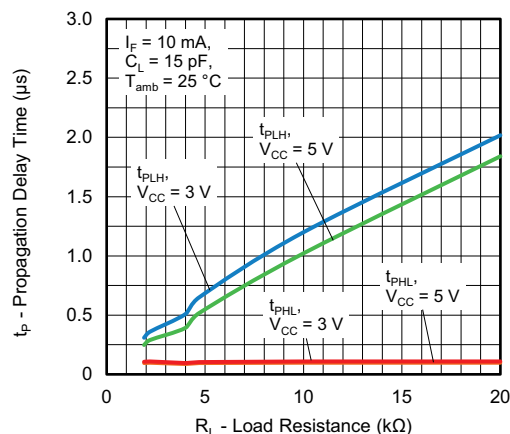


Fig. 24 - Propagation Delay Time vs. Load Resistance

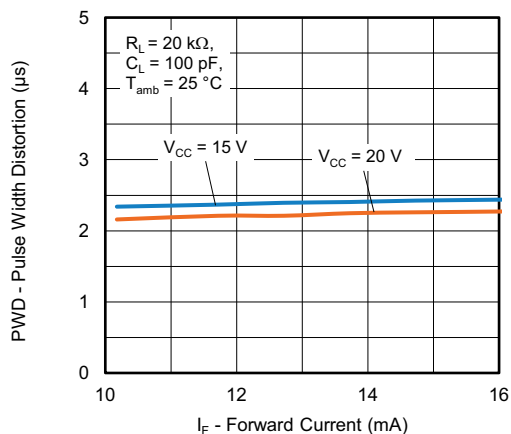


Fig. 25 - Propagation Delay Time vs. Load Resistance

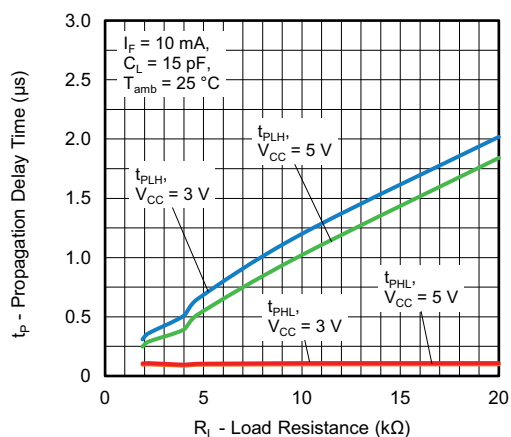


Fig. 26 - Pulse Width Distortion vs. Load Resistance

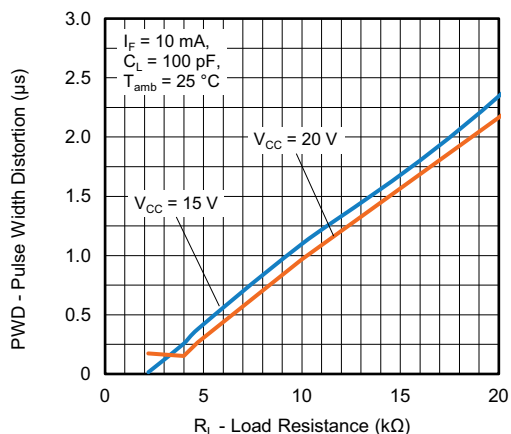


Fig. 27 - Pulse Width Distortion vs. Load Resistance

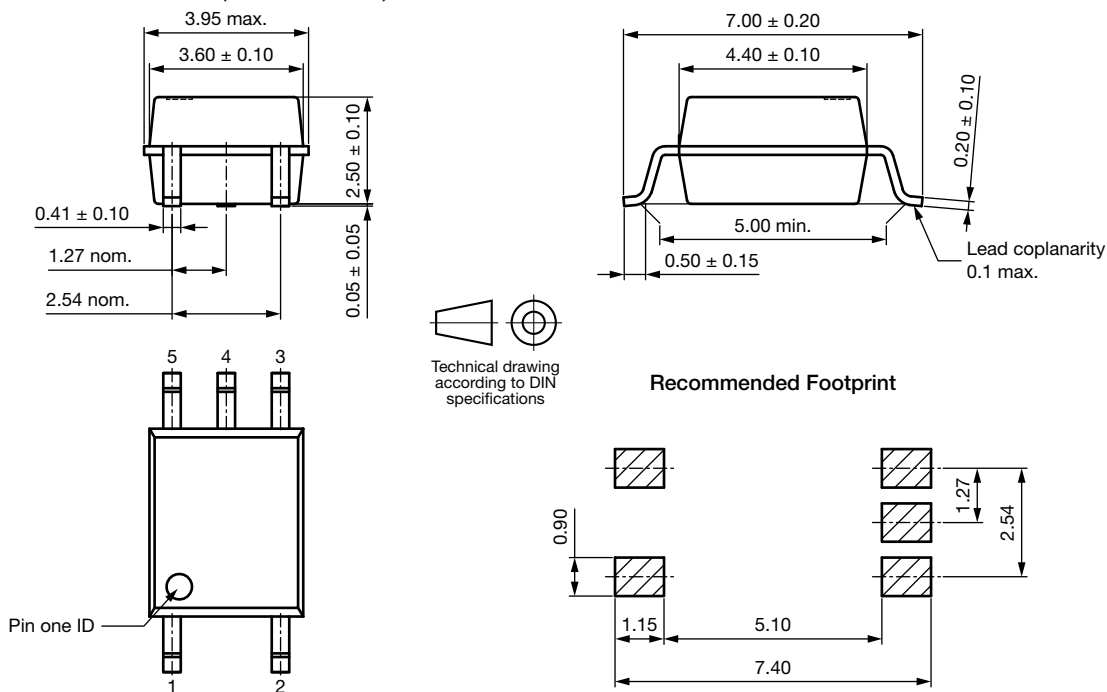

PACKAGE DIMENSIONS (in millimeters)

PACKAGE MARKING


Fig. 28 - Example of VOMHA43AT




Fig. 29 - Example of VOMHA43AT-X001T

Notes

- XXXX = LMC (lot marking code)
- VDE logo is not part of the package marking
- VDE (option 1) is reflected in the package marking with the character "X"
- Tape and reel suffix (T) is not part of the package marking

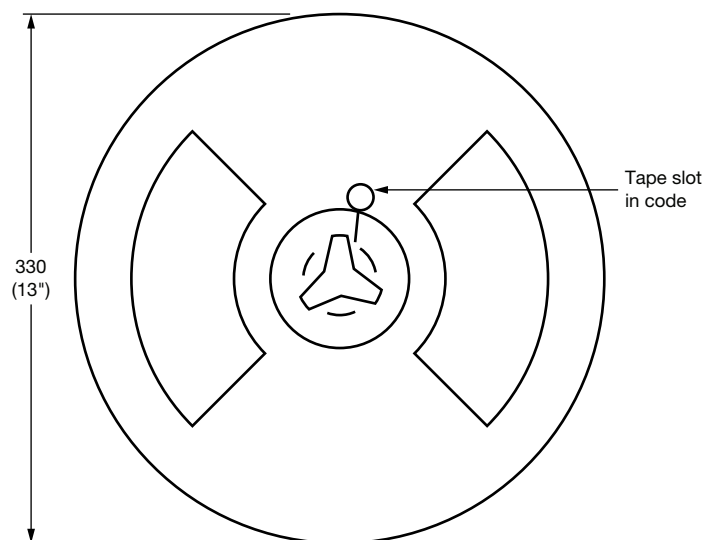
PACKING INFORMATION (tape and reel)


Fig. 30 - Tape and Reel Shipping Medium

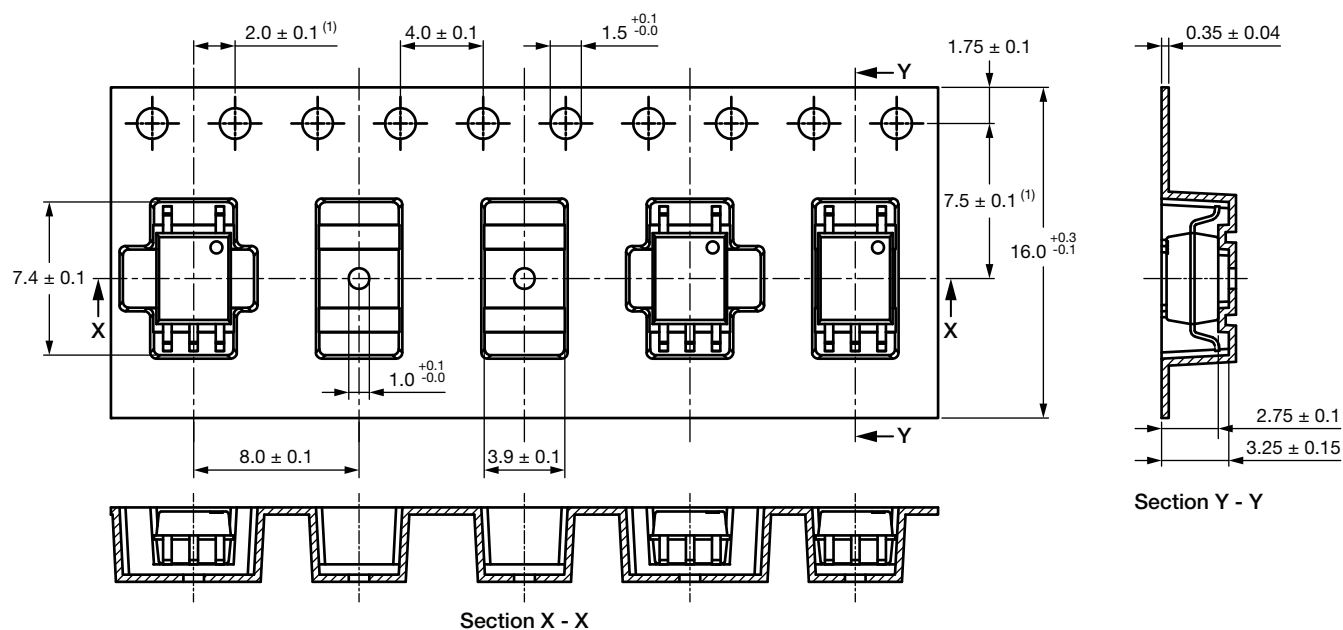


Fig. 31 - Tape and Reel Packing (2000 pieces on reel)

Notes

- Cumulative tolerance of 10 sprocket holes is ± 0.20
- (1) Measured from centerline of sprocket hole to centerline of pocket



SOLDER PROFILE

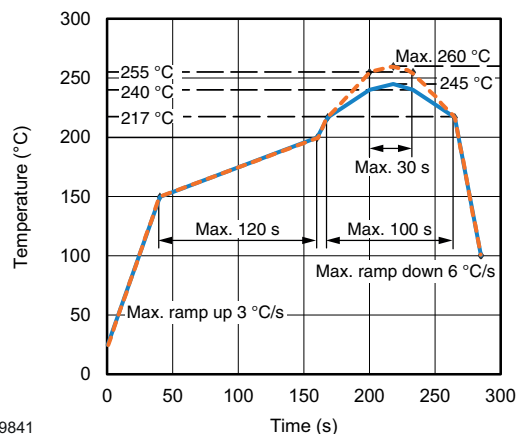


Fig. 32 - Lead (Pb)-free Reflow Solder Profile
According to J-STD-020

HANDLING AND STORAGE CONDITIONS

ESD level: HBM class 2

Floor life: unlimited

Conditions: $T_{amb} < 30\text{ °C}$, RH < 85 %

Moisture sensitivity level 1, according to J-STD-020

19841



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.