

General Description

The MAX20356 evaluation kit (EV kit) is a fully assembled and tested circuit for evaluating the MAX20356/MAX20358 power-management solution designed for ultra-low-power wearable applications.

A flexible set of power-optimized voltage regulators, including 3 x buck converters, a buck-boost converter, 4 x linear regulators, including an RTC LDO, and 3 x load switches, provide a high level of integration and the ability to create a fully optimized power architecture. Refer to the MAX20356/MAX20358 IC data sheet for detailed information regarding the operation and features of the devices.

The device is configurable through an I2C interface that allows for programming various functions and reading device status. The EV kit GUI application sends commands to the MAXPICO2PMB# adapter board to configure the device.

The EV kit comes standard with the MAX20356 EV kit version IC installed.

Features

- USB-Power Option
- Flexible Configuration
- On-Board Battery Simulation
- Sense Test Point for Output-Voltage Measurement
- Windows® 8/Windows 10-Compatible Graphical User Interface (GUI) Software
- Fully Assembled and Tested

EV KIT Contents

- MAX20356_EVKIT_A System
- MAXPICO2PMB# board
- Two USB A to USB micro-B cables

MAX20356 EV Kit Files

FILE	DESCRIPTION
MAX20356EVKitSetupVxxx.exe	PC GUI Program

[Ordering Information](#) appears at end of data sheet.

Quick Start

Required Equipment

- MAX20356 EV kit
- Windows PC with USB ports
- One USB A-to-USB Micro-B cable and PICO2PMB adapter board with the latest firmware
- One USB A-to-USB Micro-B cable or power supply (for battery simulation or battery voltage)
- One USB A-to-USB Micro-B cable or power supply (for charger)
- One voltmeter

Note: In the following sections, software-related items are identified by bolding. Text in **bold** refers to items directly from the EV kit software. Text which is **bold and underlined** refers to items from the Windows operating system.


Procedure

The EV kit is fully assembled and tested. Follow the steps to install the EV kit software, make required hardware connections, and start operation of the kit.

1. Visit www.maximintegrated.com/evkitsoftware under the Tools and Simulations tab to download the latest version of the MAX20356 EV kit software. MAX20356EVKitSetupVxxx.zip is located on the MAX20356 EV kit web page. Save the software to a temporary folder and unpack the zip file.
2. Install the EV kit software on the computer by running the **MAX20356EVKitSetupVxxx.exe** program inside the temporary folder. This copies the program files and creates an icon in the Windows **Start** menu. The software requires the .NET Framework 4.5 or later. If connected to the internet, Windows automatically updates the .NET Framework as needed.
3. The EV kit software launches automatically after installation, and it can be launched by clicking on its icon in the Windows **Start** menu.
4. Verify that all jumpers are in their default positions, as shown in [Table 1](#).
5. Make sure JP7 and JP20 are not installed until all connections have been verified.
6. Connect the type-A end of a cable to the PC and the micro-USB end of a cable to the MAXPICO2PMB# board, and connect the MAXPICO2PMB# to J3 located on the top left of the EV kit board.

7. Connect a USB A to micro-B cable from the computer to J7 on the upper left corner of the EV kit board to use VBUS2 to power the battery simulation circuits on the board.
8. Reinstall JP7 and JP20.
9. Use a voltmeter to check VSIM test point is approximately 5V; BATSIM test point is approximately 3.7V. To adjust the BATSIM voltage, connect DMM to BATSIM TP and turn the R58 BATSIM potentiometer.
10. On the computer, open the MAX20356 GUI. The status bar at the bottom shows **MAX20356 Not Found**, as shown in [Figure 1](#). The IC is in Seal mode.
11. Set DMM to measure voltage and connect the positive lead to TP6, SYS and ground lead to any GND TP.
12. Hold PFN1 button for ~4s to power on the device and measure VSYS ~ 3.7V
13. The MAX20356EVKIT should be powered on, and the status of the EV kit Tool now shows **Connected**, and the registers are read and displayed [Figure 2](#).
14. The EV kit is now ready for additional evaluation.
15. To evaluate the battery charger, shunt J4 and plug in the USB micro-B cable to J1 of the EV kit to use USB VBUS power, or externally supply the charging power on TP4 CHGIN.

MAX20356 EV Kit Photo

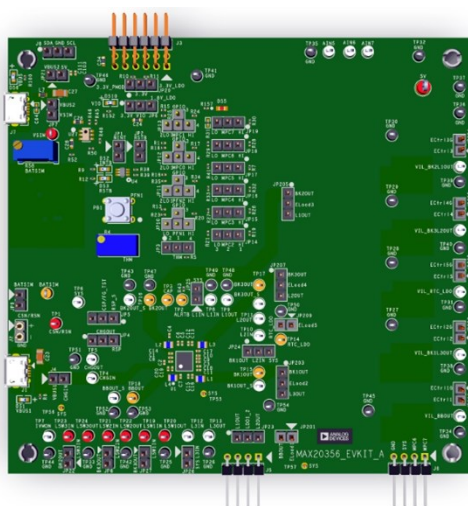

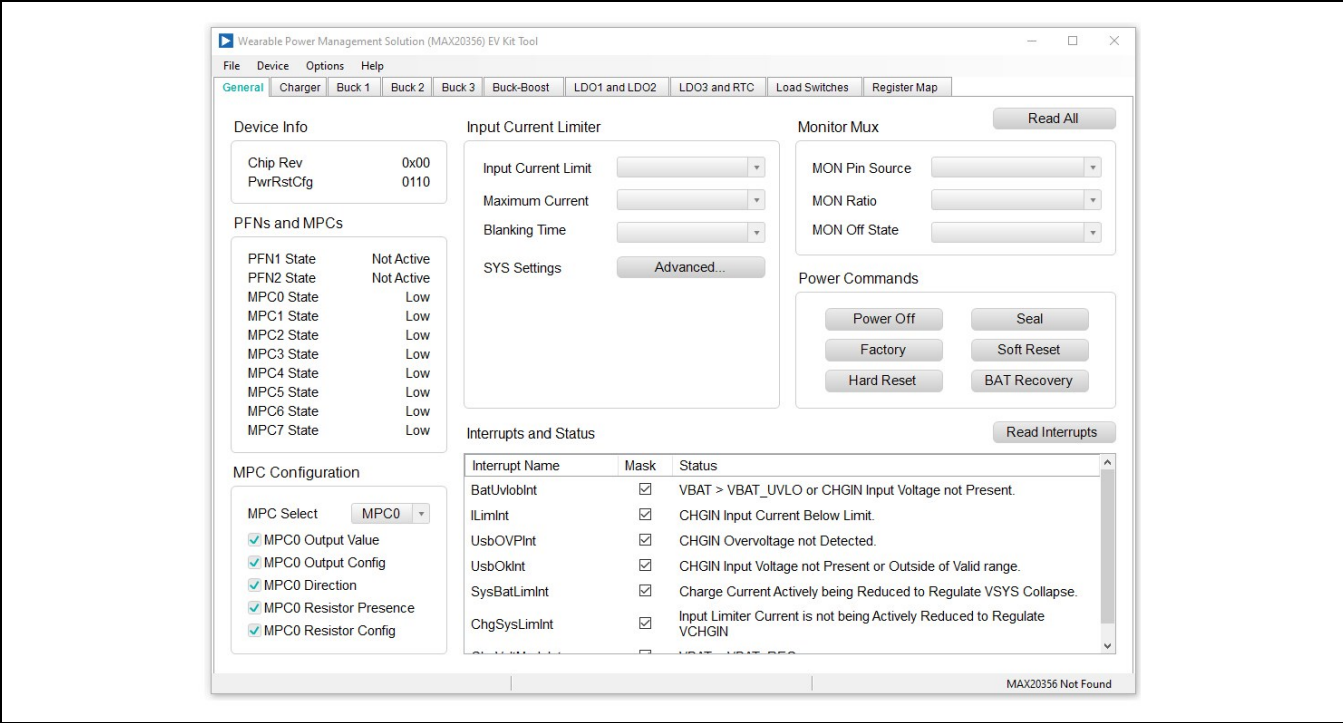


Figure 1. MAX20356 Not Found Status

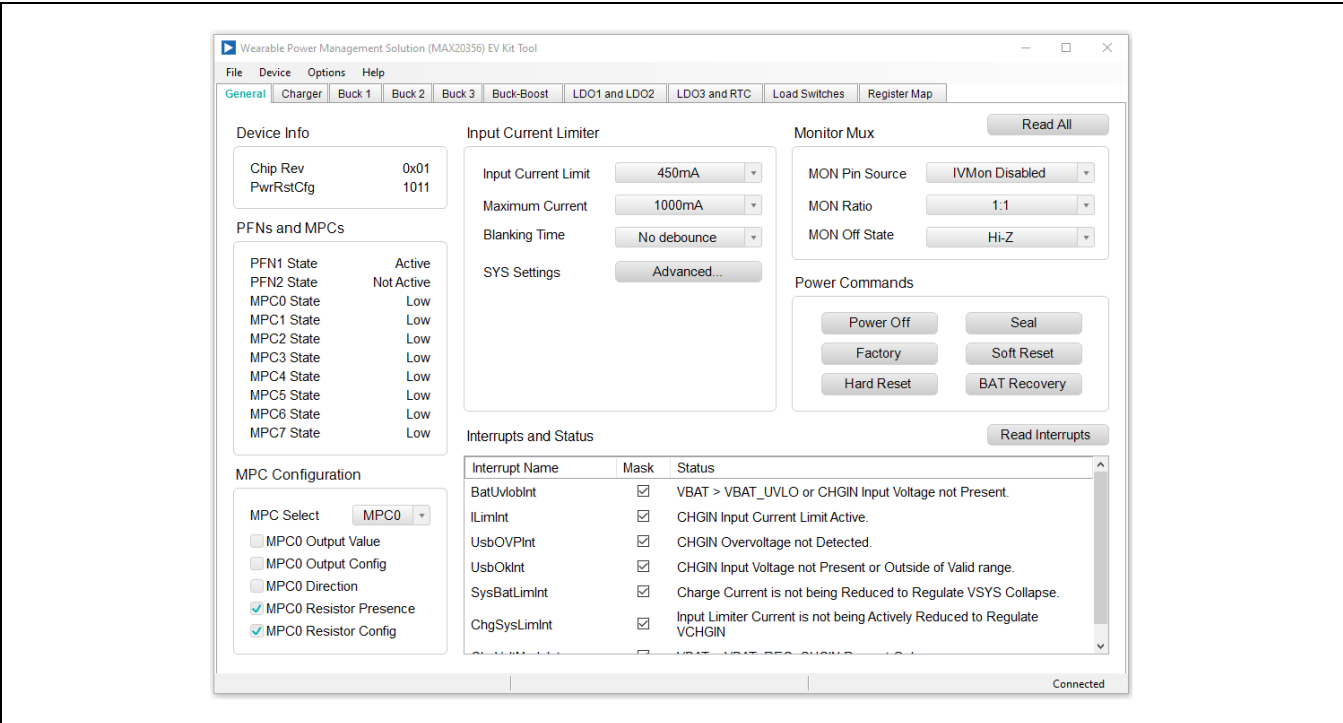


Figure 2. Connected Status

Detailed Description of Software

Software Startup

Upon starting the program, the EV kit software automatically searches for the USB interface circuit and then for the IC device addresses. The EV kit enters the normal operating mode when the connection is established and addresses are found. If the USB connection is not detected, the status bar displays **Not Connected**. If the USB connection is detected, but the MAX20356 is not found, the status bar shows **MAX20356 Not Found**.

ToolStrip Menu Bar

The **ToolStrip** menu bar ([Figure 3](#)) is located at the top of the GUI window. This bar comprises **File**, **Device**, **Options**, and **Help** menus; each function is detailed in the following sections.

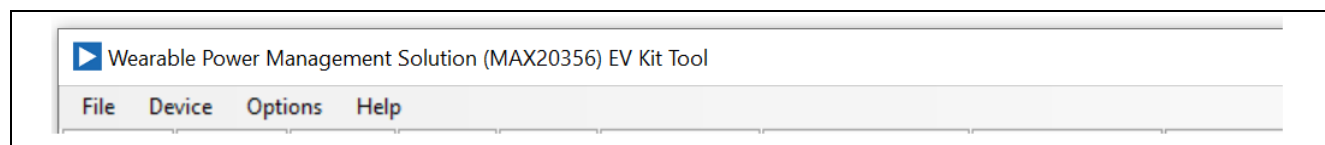


Figure 3. The ToolStrip Menu Items

File Menu

The **File** menu contains the option to exit out of the GUI program.

Device Menu

The **Device** menu provides the ability to connect or disconnect the EV kit to the GUI. The **Advanced → I2C Read/Write** menu allows the user to read from or write to a selected register with a specified slave address. The **Advanced → Use USB2PMB2#** option should be checked if using with the USB2PMB2# adapter board.

Options Menu

The **Options** menu provides several settings to access additional features offered by the GUI. The **Disable Polling** option allows registers to be read manually instead of receiving automatic frequent register updates from the IC. The **Lock/Unlock** option allows for the lock or unlock of the bucks, buck-boost, LDOs, LSWs, charger, watchdog, and rail sequence through I2C.

Help Menu

The **Help** menu contains the **About** option, which displays the GUI splash screen indicative of the GUI version being used.

Tab Controls

The MAX20356 EV kit software GUI provides a convenient way to test the features of the MAX20356. Each tab contains controls relevant to various blocks of the device. Changing these interactive controls triggers a write operation to the MAX20356 to update the register contents. The **Read All** button reads all the configuration registers that are visible on the current tab page. The **Interrupts and Status** section in each tab shows the state of the status registers and their corresponding interrupts. Checking or unchecking the **Mask** option controls which interrupts cause the $\overline{\text{INT}}$ output to be pulled low when asserted.

Click the **Read Interrupts** button to read and clear the interrupts visible in the current tab. Asserted interrupts are denoted by bold text in the **Interrupt Name**. All statuses are polled continuously. The polling feature can be disabled in the **Options** section of the menu bar by selecting **Disable Polling**.

General Tab

The **General** tab (Figure 4) provides information on device info, PFNs and MPCs status, and configuration. Charger input current and voltage limit setting, IVMON setting, power commands, and some general interrupts and status are also found under this tab.

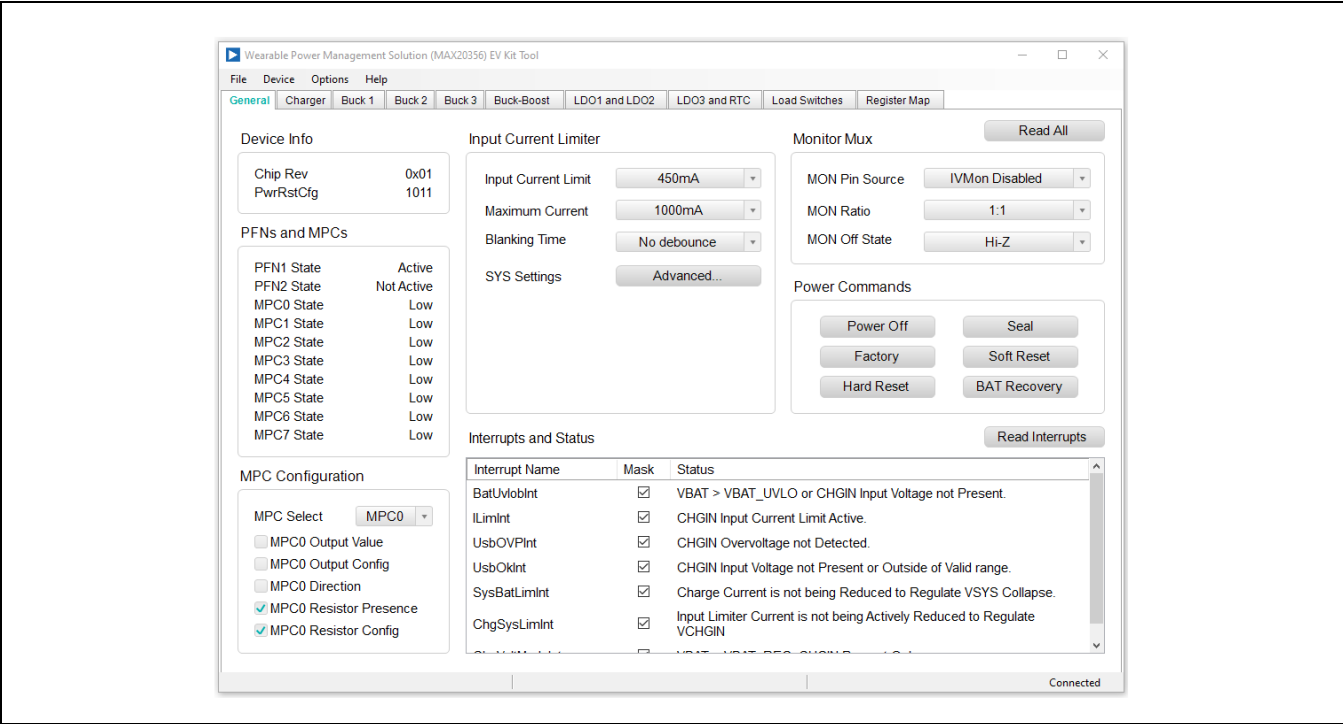


Figure 4. General Tab

Charger Tab

The **Charger** tab (Figure 5) provides options to set charger voltage, current, and timer in different charging states. The thermistor monitor configuration can be accessed by clicking the **Advanced** button.

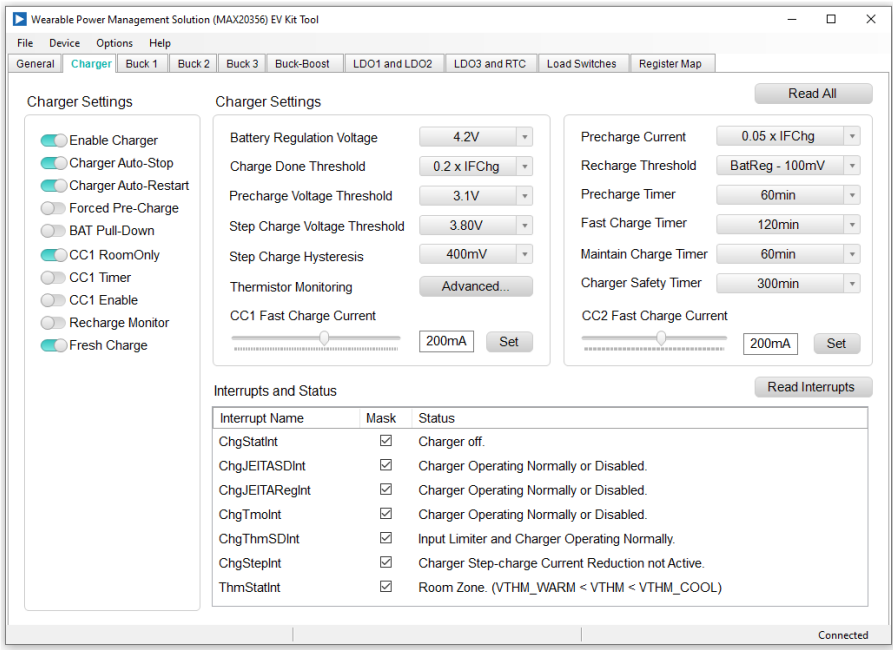


Figure 5. Charger Tab

Buck1/2/3, Buck-Boost Tab

The **Buck1**, **Buck2**, **Buck3**, and **Buck-Boost** tabs ([Figure 6](#), [Figure 7](#), [Figure 8](#) and [Figure 9](#)) provide options to enable buck/buck-boost, set output voltages, inductor current settings, DVS mode, voltage setting, and some additional settings.

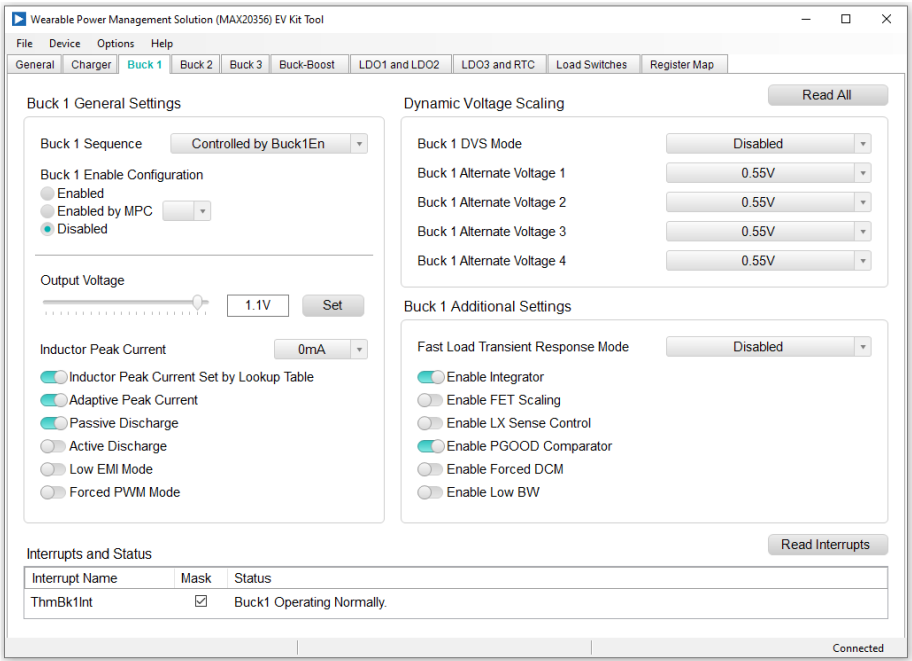


Figure 6. Buck1 Tab

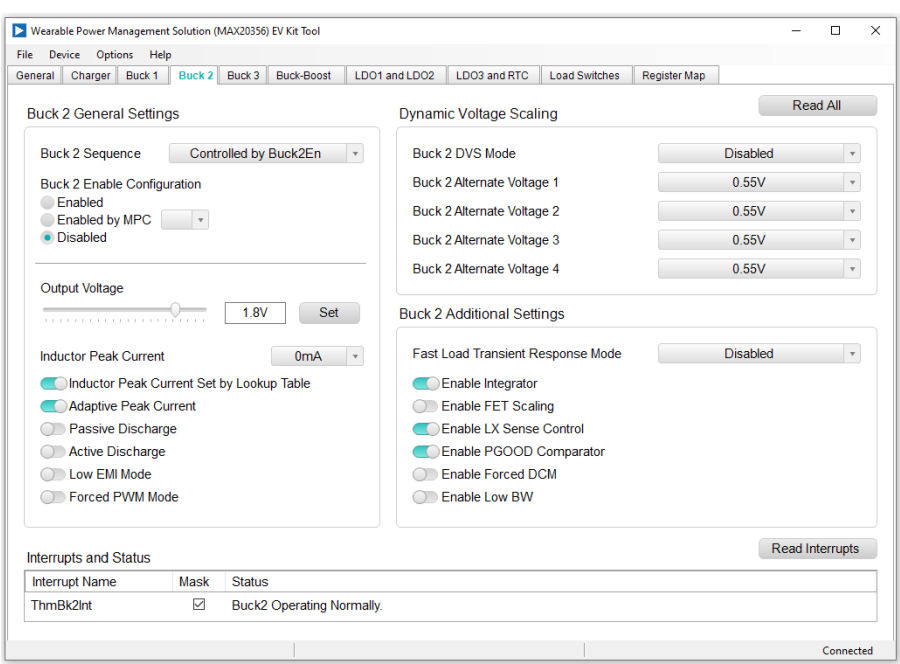


Figure 7. Buck2 Tab

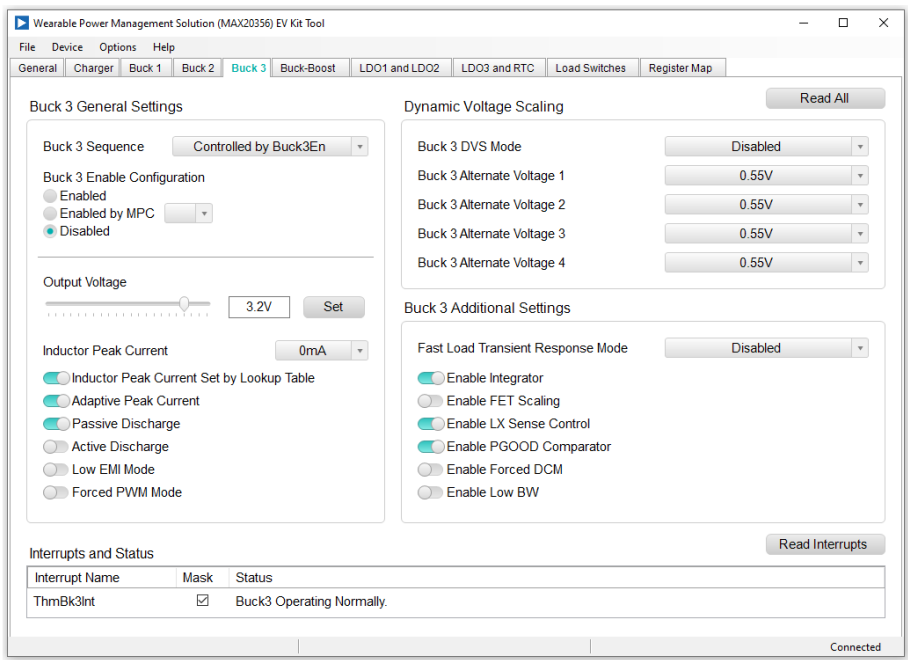


Figure 8. Buck3 Tab

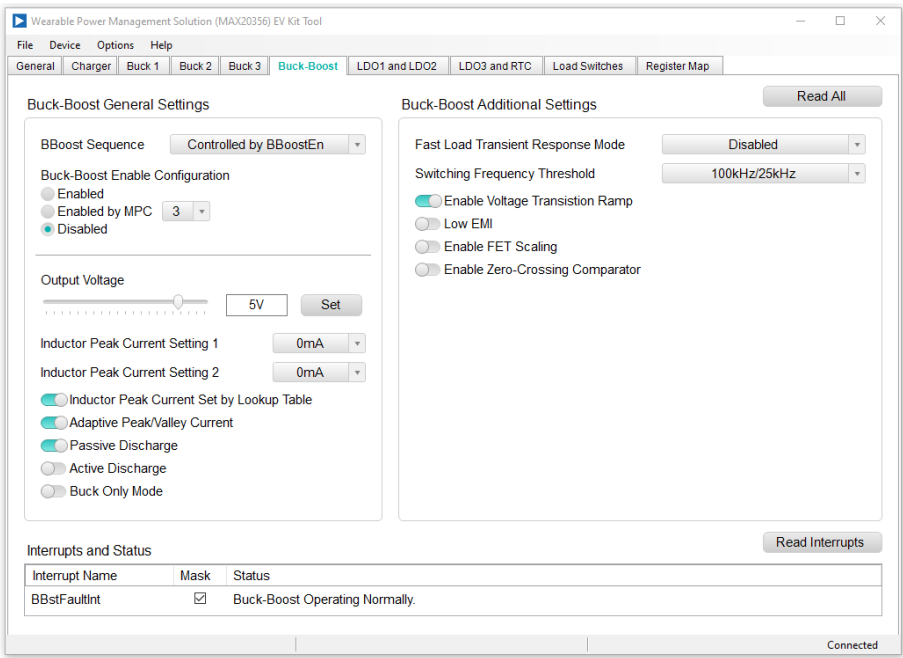


Figure 9. Buck-Boost Tab

LDO1/2/3 and RTC LDO Tab

The LDO1 and LDO2, and LDO3 and RTC (Figure 10 and Figure 11) provide options to enable LDOs, set LDO voltage, and change other LDO settings.

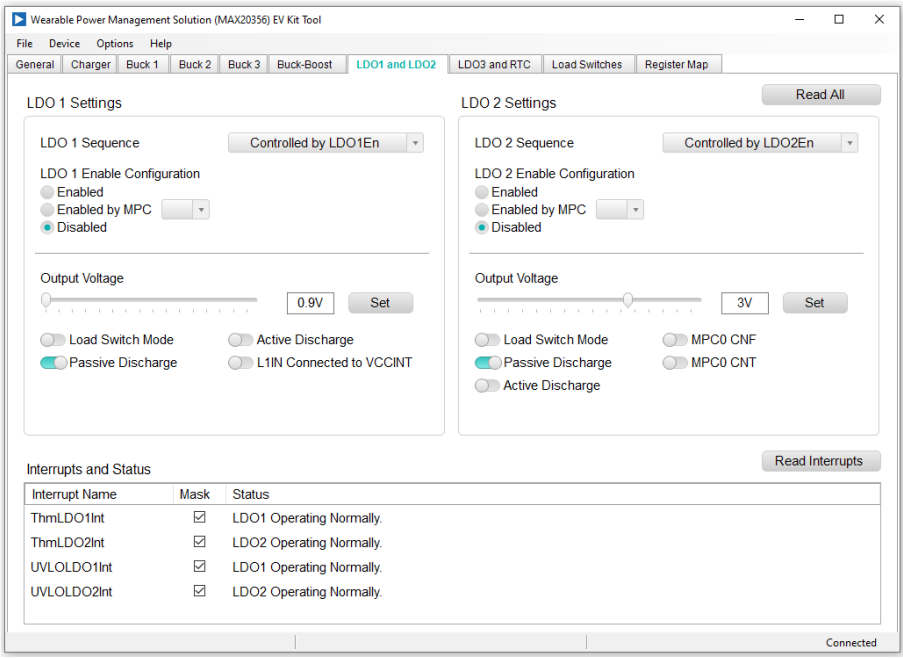


Figure 10. LDO1 and LDO2 Tab

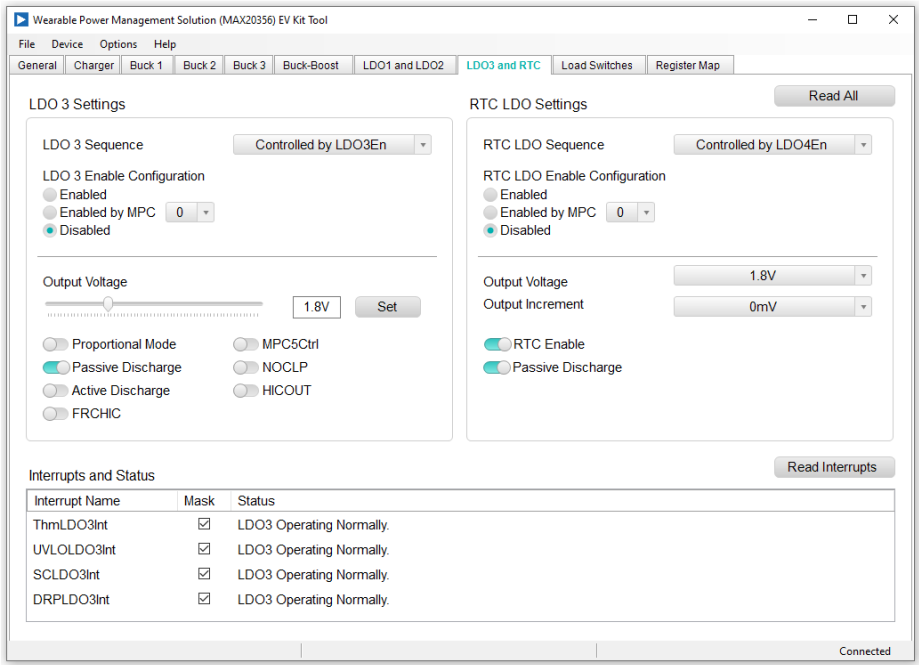


Figure 11. LDO3 and RTC Tab

Load Switches Tab

The **Load Switches** tab (Figure 12) includes Load Switch 1, Load Switch 2, and Load Switch 3 settings.

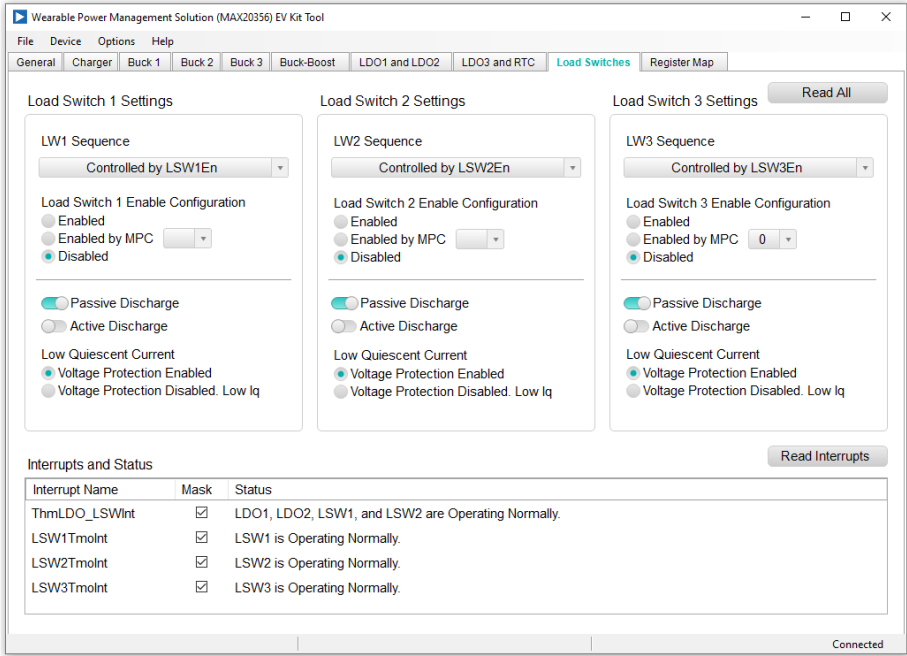


Figure 12. Load Switches Tab

Register Map Tab

The **Register Map** tab ([Figure 13](#)) provides all names and values of the MAX20356 registers. Click **Read All** in the top right corner to perform a burst read of all registers.

The left table shows the register to be read from and written to. The right table contains descriptions for each register field of the selected 8-bit register. All bits, along with their field names, are displayed at the bottom of the page.

To set a bit, click the bit label. **Bold** text represents logic 1, and regular text represents logic 0. To configure the changes to the device, click the **Write** button at the bottom right.

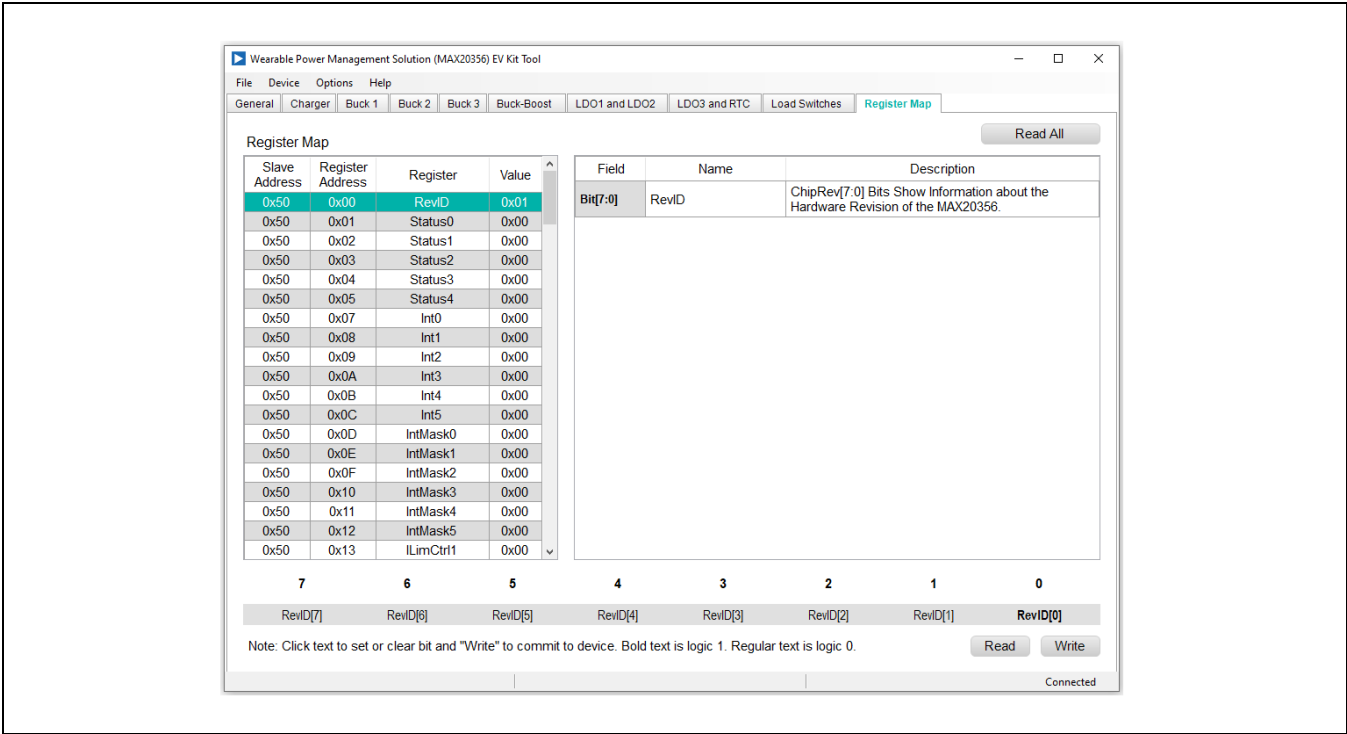


Figure 13. Register Map Tab

Detailed Description of Hardware

The MAX20356 EV kit evaluates the MAX20356 ultra-low-power wearable PMIC, which communicates over the I²C interface. The EV kit demonstrates the IC features such as bucks, buck-boost, linear regulators, load switches, and a battery charger. The EV kit uses the IC in a 63-bump wafer-level package on a proven, six-layer PCB design. The EV kit can use USB VBUS 5V DC for battery and charger input power source. Alternatively, the EV kit can be powered from an external power supply. [Figure 14](#) shows the EV kit block annotated picture.

Hardware Setup

To use the EV kit with the EV kit software, connect the MAXPICO2PMB# to the PMOD connector in the top left corner of the board. The MAXPICO2PMB# also provides 3.3V to the logic voltage VIO of the EV kit when shunting 1-2 in a JP20. The user can use the J7 USB VBUS to power the battery simulation circuits on the EV kit to supply the BAT of the IC. Turning the R58 potentiometer can change the BATSIM voltage. Connect BATSIM to the BAT of the IC with a shunt on JP9. Alternatively, instead of using battery simulation circuits on the board, the user can connect a Li-ion battery to the J2 connector. The user can use the J1 USB VBUS as a CHGIN source and place a shunt on J4.

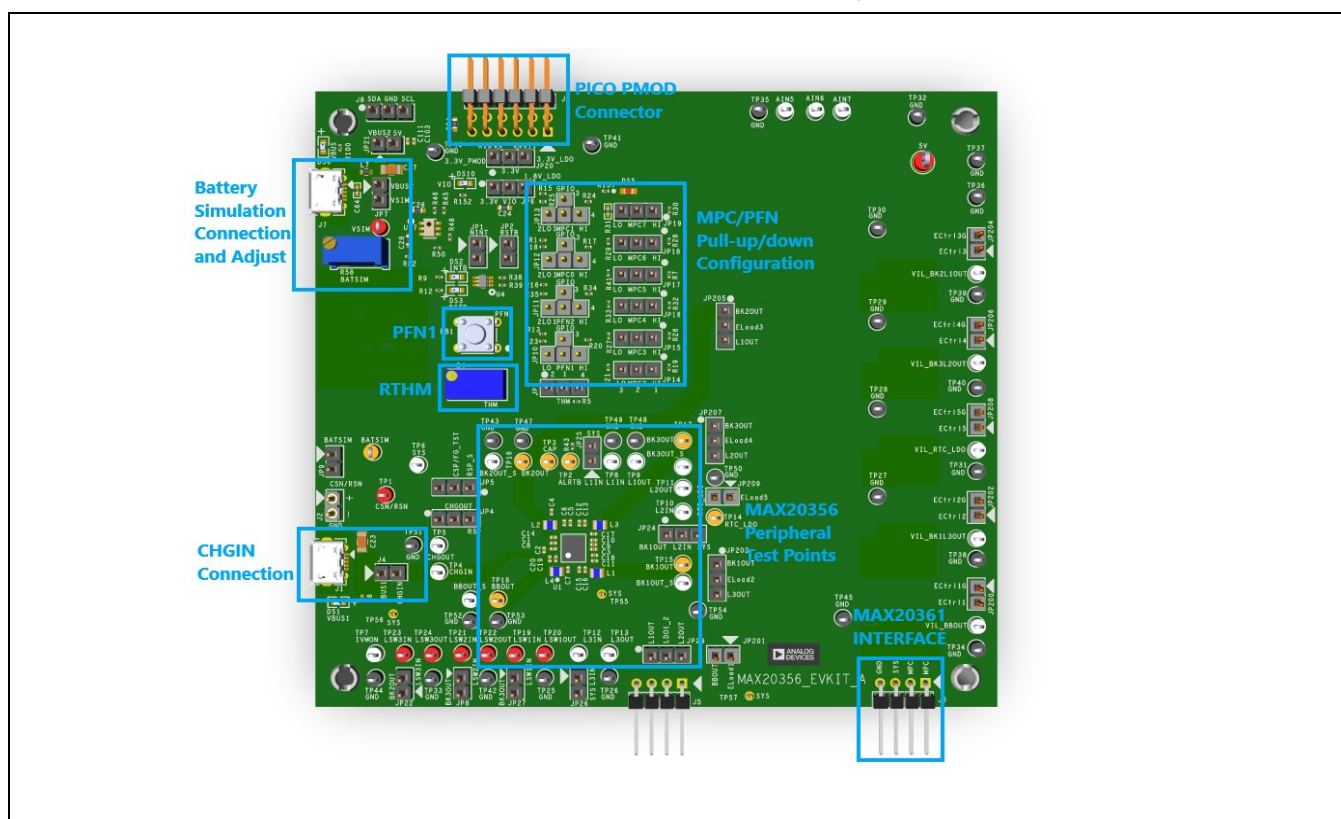


Figure 14. MAX20356 EV Kit Block Annotated Picture

PFNs and MPCs States

The PFNs and MPCs can be pulled up or pulled low to VIO through a 100kΩ resistor or connected to the ground through a 100kΩ resistor.

Regulators and Peripherals

All regulator outputs are made available on test points. The inputs to the LDOs and Load Switches can be supplied through setting the corresponding jumper for L_IN (JP25, JP24, and JP26) and LSW_IN (JP27, JP8, and JP22) or

externally supplied through test points. The LDO1 input can be supplied from the V_{CCINT} of the IC if set through the I²C (bit LDO1IntSup). The bucks and buck-boost outputs have sense test points, which provide easy voltage measurement.

Thermistor setup

There are two configurations to set the desired thermistor voltage level. The thermistor pin has a 10k Ω internal pullup.

To position the thermistor in the room zone, set the DMM to measure Ω and connect the positive lead to pin1 of JP3. Turn the THM POT until the DMM reads ~10k Ω .

Remove the DMM and install a shunt in position 1-2 of JP3. The register map should report that the thermistor is in the room temperature zone.

There is also a 10k Ω fixed resistor by positioning the JP3 shunt to 2-3. This setting will put the thermistor in the room temperature zone.

$\overline{INT}$ and $\overline{RST}$ LED Indicators

Shunts can be installed on JP1 and JP2 to show the status of $\overline{INT}$ and $\overline{RST}$ as LED indicators, DS2 and DS3. When the corresponding LED illuminates, it verifies the active-low output is pulled low.

Jumper Setting

[Table 1](#) shows the detailed jumper setting, and [Table 2](#) shows the connector description.

Table 1. Jumper Table

JUMPER	SHUNT POSITION	MAX20356 DESCRIPTION
JP1	1-2*	$\overline{INT}$ connect to pull up VIO and DS2
JP2	1-2*	$\overline{RST}$ connect to pull up VIO and DS3
JP3	1-2*	THM connect to potentiometer
	2-3	THM connect to 10k Ω
JP4	1-2*	Connects CHGOUT to CSN/RSN
	2-3	Connects CHGOUT to RSP
JP5	1-2	Connects CSP/FT_TST to RSP_S
	2-3*	Connects CSP/FT_TST to CSN/RSN
JP6	1-2*	Connects VIO to PMOD 3.3V
	1-3	Connects VIO to 1.8V_LDO
JP7	1-2*	Connects VBUS2 to VSIM
JP8	1-2	Connects BK3OUT to LSW2IN
JP9	1-2*	Connects BATSIM to CSN/RSN
JP10	1-2	PFN1 pull down to ground
	1-3	PFN1 connect to GPIO1
	1-4	PFN1 pull up to VIO
JP11	1-2	PFN2 pull down to ground
	1-3	PFN2 connect to GPIO1
	1-4	PFN2 pull up to VIO
JP12	1-2	MPC0 pull down to ground
	1-3	MPC0 connect to GPIO1
	1-4	MPC0 pull up to VIO

JP13	1-2	MPC1 pull down to ground
	1-3	MPC1 connect to GPIO1
	1-4	MPC1 pull up to VIO
JP14	1-2	MPC2 pull up to VIO
	2-3	MPC2 pull down to ground
JP15	1-2	MPC3 pull up to VIO
	2-3	MPC3 pull down to ground
JP16	1-2	MPC4 pull up to VIO
	2-3	MPC4 pull down to ground
JP17	1-2	MPC5 pull up to VIO
	2-3	MPC5 pull down to ground
JP18	1-2	MPC6 pull up to VIO
	2-3	MPC6 pull down to ground
JP19	1-2	MPC7 pull up to VIO
	2-3	MPC7 pull down to ground
JP20	1-2*	Selects 3.3V from 3.3V_PMOD
	2-3	Selects 3.3V from 3.3V_LDO
JP21	1-2	USB VBUS2 connects to 5V TP
JP22	1-2	Connects BK2OUT to LSW3IN
JP23	1-2	Connects LDO1_2 to L1OUT
	2-3	Connects LDO1_2 to L2OUT
JP24	1-2	Connects L2IN to BK1OUT
	2-3	Connects L2IN to SYS
JP25	1-2	Connects L1IN to SYS
JP26	1-2	Connects L3IN to SYS
JP27	1-2	Connects LSW1IN to BK3OUT
JP200	1-2	Reserved for future (RFU)
JP201	1-2	RFU
JP202	1-2	RFU
JP203	1-2	RFU
	2-3	RFU
JP204	1-2	RFU
JP205	1-2	RFU
	2-3	RFU
JP206	1-2	RFU
JP207	1-2	RFU
	2-3	RFU
JP208	1-2	RFU
JP209	1-2	RFU

*Default position.

Table 2. Connector Description

CONNECTOR	DESCRIPTION	
J1	Connect to USB cable for CHGIN voltage	
J2	J2 Connect to battery	
J3	Connect to MAXPICO2PMB#	
J4	Connect to the VBUS1 to CHGIN. Install to use CHGIN	
J5	1	Connects to BBOUT
	2	Connects to LDO1_2 selector
	3	Connects to L3OUT
J6	1	Connects to MPC7
	2	Connects to MPC6
	3	Connects to SYS
J7	Connect to the USB cable for battery simulation and 5V connection	
J8	1	Connects to SDA
	2	Connects to GND
	3	Connects to SCL

MAXPICO2PMB Firmware Update

This section covers the procedure to update the PICO2PMB Adapter Board with the latest firmware by programming a firmware image file (.bin) onto the on-board MAX32625PICO microcontroller.

Put the board in maintenance mode by holding the button while the board is connected to the computer. It may be easier to hold the button while inserting the USB cable at the computer end rather than the micro-USB connector end (see [Figure 15](#)).

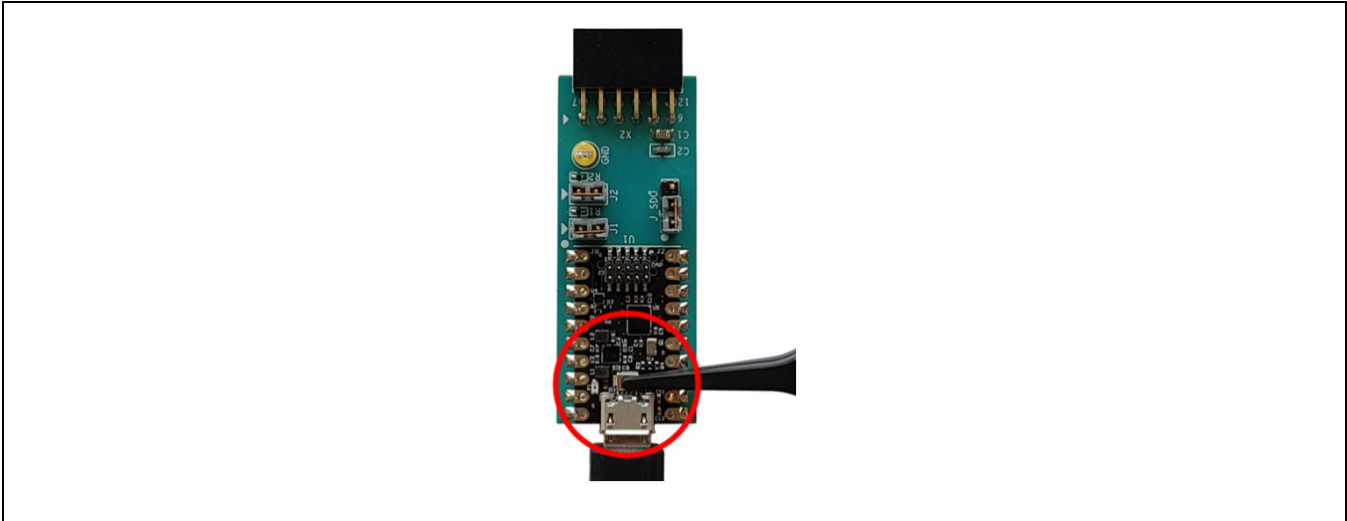


Figure 15. Enter Maintenance Mode on the MAX32625PICO.

If the board enters bootloader mode successfully, the LED on the board turns red, and the board appears to the computer as a USB drive named **MAINTENANCE**.

Drag and drop the firmware image file (.bin) into the **MAINTENANCE** drive, and the board installs the new firmware.

Ordering Information

PART	TYPE
MAX20356EVKIT#	EV Kit

#Denotes RoHS-compliance.

MAX20356 EV Kit Bill of Materials

ITEM	REF_DES	DNI/ DNP	QTY	MFG PART #	MANUFACTURER	VALUE	DESCRIPTION
1	5V	-	1	5010	KEYSTONE	N/A	TEST POINT; PIN DIA=0.125IN; TOTAL LENGTH=0.445IN; BOARD HOLE=0.063IN; RED; PHOSPHOR BRONZE WIRE SIL;
2	60, R74, R88, R144, R167	-	5	ERJ-2RK4703	PANASONIC	470K	RES; SMT (0402); 470K; 1%; +/- 100PPM/DEGC; 0.0630W
3	AIN5-AIN7, BBOU_T_S, BK1OUT_S- BK3OUT_S, TP4-TP13, TP55-TP57, VIL_BBOU_T, VIL_BK1L3 OUT, VIL_BK2L1 OUT, VIL_BK3L2 OUT, VIL_RTC_L DO	-	25	5002	KEYSTONE	N/A	TEST POINT; PIN DIA=0.1IN; TOTAL LENGTH=0.3IN; BOARD HOLE=0.04IN; WHITE; PHOSPHOR BRONZE WIRE SILVER;
4	BATSIM, TP2, TP3, TP14-TP18	-	8	5003	KEYSTONE	N/A	TEST POINT; PIN DIA=0.1IN; TOTAL LENGTH=0.3IN; BOARD HOLE=0.04IN; ORANGE; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;
5	C1, C5, C9, C10, C12, C13, C15, C16	-	8	C1005X7S1A 225K050BC	TDK	2.2UF	CAP; SMT (0402); 2.2UF; 10%; 10V; X7S; CERAMIC
6	C2	-	1	C1005X5R1V 225K050BC	TDK	2.2UF	CAP; SMT (0402); 2.2UF; 10%; 35V; X5R; CERAMIC
7	C3	-	1	C1005X5R0J 225K050BC; CL05A225K Q5NSN	TDK;SAMSUNG	2.2UF	CAP; SMT (0402); 2.2UF; 10%; 6.3V; X5R; CERAMIC
8	C4, C18	-	2	C1005X5R0J 475K050BC	TDK	4.7UF	CAP; SMT (0402); 4.7UF; 10%; 6.3V; X5R; CERAMIC
9	C6-C8, C11, C14, C17, C19, C20	-	8	GRM158R61 A226ME15	MURATA	22UF	CAP; SMT (0402); 22UF; 20%; 10V; X5R; CERAMIC ;
10	C21, C22, C32, C39, C40, C47, C48, C55, C56, C87, C88, C96, C104, C105, C109, C112, C113, C244	-	18	ANY	ANY	0.1UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.1UF; 25V; TOL=10%; MODEL=C SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7R; FORMFACTOR
11	C23, C27	-	2	GRM31CR71 H475KA12;GRJ31CR71H	MURATA; MURATA; MURATA;	4.7UF	CAP; SMT (1206); 4.7UF; 10%; 50V; X7R; CERAMIC

				475KE11;GX M31CR71H4 75KA10;UMK 316AB7475K L;GRM31CR 71H475KA12 L;CC1206KK X7R9BB475; CC1206KKX 7R9BB475	TAIYO YUDEN; MURATA; YAGEO		
12	C24	-	1	C1608X5R1 H104K080AA	TDK	0.1UF	CAP; SMT (0603); 0.1UF; 10%; 50V; X5R; CERAMIC
13	C25, C106, C107	-	3	ANY	ANY	1UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 1UF; 16V; TOL=10%; MODEL=C SERIES; TG=-55 DEGC TO +85 DEGC; TC=X5R; FORMFACTOR
14	C26	-	1	C0603C225K 9PAC; GRM188R60 J225KE01; C1608X5R0J 225K080AB	KEMET; MURATA; TDK	2.2UF	CAP; SMT (0603); 2.2UF; 10%; 6.3V; X5R; CERAMIC;
15	C28	-	1	C0603C475K 9PAC	KEMET	4.7UF	CAP; SMT (0603); 4.7UF; 10%; 6.3V; X5R; CERAMIC;
16	C29	-	1	C0402X7R50 0- 222KNE;GR M155R71H2 22KA01;C10 05X7R1H222 K050BA	VENKEL LTD.;MU RATA;TD K	2200P F	CAP; SMT (0402); 2200PF; 10%; 50V; X7R; CERAMIC
17	C30	-	1	C0603C104K 8RAC	KEMET	0.1UF	CAP; SMT (0603); 0.1UF; 10%; 10V; X7R; CERAMIC
18	C31	-	1	C3216X5R1 C476M160A B;GRM31CR 61C476ME44	TDK;MU RATA	47UF	CAP; SMT (1206); 47UF; 20%; 16V; X5R; CERAMIC
19	C33, C41, C49, C57, C89	-	5	ANY	ANY	0.01UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 0.01UF; 10V; TOL=10%; MODEL=C0402C SERIES; TG=-55 DEGC TO +125 DEGC; TC=X7R
20	C34	-	1	GRM188R60 J105KA01	MURATA	1UF	CAP; SMT (0603); 1UF; 10%; 6.3V; X5R; CERAMIC;
21	C35, C42, C43, C50, C51, C58, C59, C90, C91, C102	-	10	GRM155R71 H102JA01;G CM155R71H 102JA37	MURATA; MURATA	1000P F	CAP; SMT (0402); 1000PF; 5%; 50V; X7R; CERAMIC
22	C36, C44, C52, C60, C92	-	5	ANY	ANY	1UF	CAPACITOR; SMT (0402); CERAMIC CHIP; 1UF; 6.3V; TOL=20%; MODEL=C SERIES; TG=-55 DEGC TO +85 DEGC; TC=X5R ; FORMFACTOR
23	C37, C38, C45, C46, C53, C54,	-	13	C0402C472J 5RAC	KEMET	4700P F	CAP; SMT (0402); 4700PF; 5%; 50V; X7R; CERAMIC

	C61-C63, C86, C93, C110, C238						
24	C64, C103	-	2	C1005X5R1A 475K050	TDK	4.7UF	CAP; SMT (0402); 4.7UF; 10%; 10V; X5R; CERAMIC
25	C94, C95	-	2	GRM155R61 C104KA88	MURATA	0.1UF	CAP; SMT (0402); 0.1UF; 10%; 16V; X5R; CERAMIC
26	C97-C100	-	4	C0402C105K 8PAC;CC040 2KRX5R6BB 105	KEMET;Y AGEO	1UF	CAP; SMT (0402); 1UF; 10%; 10V; X5R; CERAMIC
27	C101, C111	-	2	GRM155R71 A104JA01	MURATA	0.1UF	CAP; SMT (0402); 0.1UF; 5%; 10V; X7R; CERAMIC
28	C108	-	1	C3216X5R1 H106K160AB ;GRM31CR6 1H106KA12	TDK;MU RATA	10UF	CAP; SMT (1206); 10UF; 10%; 50V; X5R; CERAMIC
29	DS1-DS3, DS6, DS10	-	5	LG L29K- G2J1-24	OSRAM	LG L29K- G2J1- 24	DIODE; LED; SMT (0603); Vf=1.7V; If(test)=0.002A; -40 DEGC TO +100 DEGC
30	DS5	-	1	LTST- C190CKT	LITE-ON ELECTR ONICS INC.	LTST- C190C KT	DIODE; LED; STANDARD; RED; SMT (0603); PIV=5.0V; IF=0.04A; -55 DEGC TO +85 DEGC
31	J1, J7	-	2	ZX62D-B- 5P8	HIROSE ELECTRI C CO LTD.	ZX62D- B-5P8	CONNECTOR; MALE; SMT; MICRO UNIVERSAL SERIES BUS B-TYPE CONNECTOR; RIGHT ANGLE; 5PINS
32	J2	-	1	800-10-002- 10-001000	MILLMAX	800-10- 002-10- 001000	CONNECTOR; MALE; TH; SINGLE ROW; STRAIGHT; 2PINS
33	J3	-	1	PBC06DBAN	SULLINS ELECTR ONICS CORP.	PBC06 DBAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; RIGHT ANGLE; 12PINS; 12PINS - ALTERNATE PIN NUMBERING
34	J4, JP1, JP2, JP7- JP9, JP21, JP22, JP25- JP27	-	11	PBC02SAAN	SULLINS ELECTR ONICS CORP.	PBC02 SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 2PINS
35	J5, J6	-	2	PEC04SBAN	SULLINS ELECTR ONICS CORP.	PEC04 SBAN	CONNECTOR; MALE; THROUGH HOLE; 0.100INCH CONTACT CENTERS; MALE BREAKAWAY HEADERS; RIGHT ANGLE; NO MOUNTING; 4PINS
36	J8, JP3-JP6, JP14-JP20, JP23, JP24, JP203, JP205, JP207	-	17	PBC03SAAN	SULLINS	PBC03 SAAN	CONNECTOR; MALE; THROUGH HOLE; BREAKAWAY; STRAIGHT; 3PINS; -65 DEGC TO +125 DEGC
37	JP10-JP13	-	4	TSW-104-07- L-S	SAMTEC	TSW- 104-07- L-S	EVKIT PART-CONNECTOR; MALE; THROUGH HOLE; TSW SERIES; SINGLE ROW; STRAIGHT; 4PINS

38	JP200-JP202, JP204, JP206, JP208, JP209	-	7	TSW-102-07-T-S	SAMTEC	TSW-102-07-T-S	CONNECTOR; THROUGH HOLE; TSW SERIES; SINGLE ROW; STRAIGHT; 2PINS; -55 DEGC TO +105 DEGC
39	L1-L4	-	4	DFE201612E-2R2M	MURATA	2.2UH	INDUCTOR; SMT (0806); WIREWOUND CHIP; 2.2UH; TOL=+/-20%; 1.8A
40	L7	-	1	BLM18AG601SN1	MURATA	600	INDUCTOR; SMT (0603); FERRITE-BEAD; 600; TOL=+/-; 0.5A
41	PB1	-	1	1825910-6	TE CONNECTIVITY	1825910-6	SWITCH; SPST; THROUGH HOLE; 24V; 0.05A; TACTILE SWITCH; RCOIL=0 OHM; RINSULATION=100M OHM; TE CONNECTIVITY
42	Q200-Q204	-	5	IPC100N04S5L1R1ATMA1	INFINEON	IPC100N04S5L1R1ATMA1	TRAN; OPTIMOS 5 POWER-TRANSISTOR; NCH; PG-TDSON-8-34; PD-(150W); I-(100A); V-(40V)
43	Q208	-	1	FDN360P	ON SEMICONDUCTOR	FDN360P	TRANSISTOR, MOSFET P-CHANNEL, SUPERSOT-3, PD=0.5W, ID=-2.0A, VDSS=-30V, VGSS=+/-20V
44	Q209	-	1	2N7002; 2N7002; 2N7002	DIODES INCORPORATED; ST MICROELECTRONICS; ON SEMICONDUCTOR; MICROCOMMERICAL COMPONENTS	2N7002	TRAN; ; NCH; SOT-23; PD-(0.33W); IC-(0.5A); VCEO-(60V); -55 DEGC TO +150 DEGC
45	R1, R13, R15, R16	-	4	ERJ-2RKf1001	PANASONIC	1K	RES; SMT (0402); 1K; 1%; +/-100PPM/DEGC; 0.1000W
46	R3, R22, R55, R69, R83, R139	-	6	9C04021A100FL; RC0402FR-07100RL	PANASONIC; YAGEO PHYCOMP	100	RES; SMT (0402); 100; 1%; +/-100PPM/DEGC; 0.0630W
47	R4	-	1	PV36Y105C01B00	MURATA	1M	RESISTOR; THROUGH-HOLE-RADIAL LEAD; PV36 SERIES; 1M OHM; 10%; 100PPM; 0.5W; TRIMMER POTENTIOMETER; 25 TURNS; MOLDER CERAMIC OVER METAL FILM
48	R5, R10, R11, R38, R39, R49, R53, R96-R99, R174, R175, R281, R282	-	15	RC0402FR-0710KL; CR0402-FX-1002GLF	YAGEO; BOURNS	10K	RES; SMT (0402); 10K; 1%; +/-100PPM/DEGC; 0.0630W

49	R6	-	1	ERJ-2LWFR010	PANASONIC	0.01	RES; SMT (0402); 0.01; 1%; 0 TO +500PPM/DEGC; 0.2000W
50	R7, R17-R21, R23-R35, R41, R45, R46, R48, R50, R57	-	25	ERJ-2GEJ104	PANASONIC	100K	RES; SMT (0402); 100K; 5%; +/-200PPM/DEGC; 0.1000W
51	R8, R9, R12, R100, R152	-	5	CRCW0402499RFB	VISHAY DALE	499	RES; SMT (0402); 499; 1%; +/-100PPM/DEGC; 0.0630W
52	R14, R40, R68, R82, R138	-	5	CRCW040220K0FB	VISHAY DALE	20K	RES; SMT (0402); 20K; 1%; +/-100PPM/DEGC; 0.0630W
53	R36, R42, R70, R84, R140, R161, R178-R180, R286	-	10	ANY	ANY	0	RESISTOR; 0402; 0 OHM; 1%; 100PPM; 0.0625W; THICK FILM; FORMFACTOR
54	R43	-	1	CRCW04024K70FB;MCR01MZPF4701	VISHAY DALE;ROHM SEMICONDUCTOR	4.7K	RES; SMT (0402); 4.7K; 1%; +/-100PPM/DEGC; 0.0630W
55	R44, R72, R73, R86, R87, R142, R143, R164-R166	-	10	ERJ-2RKF2002	PANASONIC	20K	RES; SMT (0402); 20K; 1%; +/-100PPM/DEGC; 0.1000W
56	R47, R61, R81, R89, R145	-	5	CRCW0402649KFB	VISHAY DALE	649K	RES; SMT (0402); 649K; 1%; +/-100PPM/DEGC; 0.0630W
57	R51, R60, R158-R160	-	5	ERJ-2GE0R00	PANASONIC	0	RES; SMT (0402); 0; JUMPER; JUMPER; 0.1000W
58	R52	-	1	ERJ-2RKF5100	PANASONIC	510	RES; SMT (0402); 510; 1%; +/-100PPM/DEGC; 0.1000W
59	R54, R56	-	2	WSL0805R1000FEA18	VISHAY DALE	0.1	RES; SMT (0805); 0.1; 1%; +/-75PPM/DEGC; 0.1250W
60	R58	-	1	3296Y-1-253LF	BOURNS	25K	RESISTOR; THROUGH-HOLE-RADIAL LEAD; 3296 SERIES; 25K OHM; 10%; 100PPM; 0.5W; SQUARE TRIMMING POTENTIOMETER; 25 TURNS; MOLDED CERAMIC OVER METAL FILM
61	R59	-	1	ERJ-2RKF1152	PANASONIC	11.5K	RES; SMT (0402); 11.5K; 1%; +/-100PPM/DEGC; 0.1000W
62	R62, R75, R90, R148, R170	-	5	CRCW04021M00FB	VISHAY DALE	1M	RES; SMT (0402); 1M; 1%; +/-100PPM/DEGC; 0.0630W
63	R63, R64, R76, R77, R91, R92, R146, R147, R168, R169	-	10	ANY	ANY	1K	RESISTOR; 0402; 1K; 1%; 100PPM; 0.0625W; THICK FILM; FORMFACTOR
64	R65, R67, R78, R80,	-	10	CRCW0402787KFB	VISHAY DALE	787K	RES; SMT (0402); 787K; 1%; +/-100PPM/DEGC; 0.0630W

	R93, R95, R149, R151, R172, R173						
65	R66, R79, R94, R171	-	4	CRL1206- JW-R100ELF	BOURNS	0.1	RES; SMT (1206); 0.1; 1%; +/-200PPM/DEGC; 0.2500W
66	R71, R85, R141, R162, R163	-	5	RC0402FR- 07680RL	YAGEO	680	RES; SMT (0402); 680; 1%; +/-100PPM/DEGC; 0.0630W
67	R150	-	1	CRCW12061 78RFB	VISHAY DALE	178	RES; SMT (1206); 178; 1%; +/-100PPM/DEGC; 0.2500W
68	R153	-	1	CRCW04024 752FK; 9C04021A47 52FLHF3; CRCW04024 7K5FK	VISHAY DALE;YA GEO;VIS HAY DALE	47.5K	RES; SMT (0402); 47.5K; 1%; +/- 100PPM/DEGC; 0.0630W
69	R2, R37, R154, R156	-	4	CRCW04021 00KFK;RC04 02FR- 07100KL	VISHAY; YAGEO	100K	RES; SMT (0402); 100K; 1%; +/- 100PPM/DEGC; 0.0630W
70	R155	-	1	CRCW04021 69KFK	VISHAY DALE	169K	RES; SMT (0402); 169K; 1%; +/- 100PPM/DEGC; 0.0630W
71	R157	-	1	CRCW04024 70RFB	VISHAY DALE	470	RES; SMT (0402); 470; 1%; +/-100PPM/DEGC; 0.0630W
72	R176, R177	-	2	ANY	ANY	0	RESISTOR; 0603; 0 OHM; 0%; JUMPER; 0.10W; THICK FILM; FORMFACTOR
73	SPACER1- SPACER4	-	4	9032	KEYSTO NE	9032	MACHINE FABRICATED; ROUND-THRU HOLE SPACER; NO THREAD; M3.5; 5/8IN; NYLON
74	SU1-SU27, SU200- SU209	-	37	S1100- B;SX1100- B;STC02SYA N	KYCON;K YCON;S ULLINS ELECTR ONICS CORP.	SX110 0-B	TEST POINT; JUMPER; STR; TOTAL LENGTH=0.24IN; BLACK; INSULATION=PB;PHOSPHOR BRONZE CONTACT=GOLD PLATED
75	TP1, TP19- TP24, VSIM	-	8	5000	KEYSTO NE	N/A	TEST POINT; PIN DIA=0.1IN; TOTAL LENGTH=0.3IN; BOARD HOLE=0.04IN; RED; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;
76	TP25-TP54	-	30	5001	KEYSTO NE	N/A	TEST POINT; PIN DIA=0.1IN; TOTAL LENGTH=0.3IN; BOARD HOLE=0.04IN; BLACK; PHOSPHOR BRONZE WIRE SILVER PLATE FINISH;
77	U1	-	1	MAX20356	MAXIM	MAX20 356	EVKIT PART- IC; WEARABLE POWER NAMAGEMENT SOLUTION; PACKAGE OUTLINE DRAWING: 21-100616; WLP 63 PINS; 0.5MM PITCH; PACKAGE CODE: W633A4+1
78	U2	-	1	OPA569AID WPR	TEXAS INSTRU MENTS	OPA56 9AIDW PR	IC; AMP; RAIL-TO-RAIL I/O; POWER AMPLIFIER; WSOIC20-EP 300MIL
79	U3	-	1	MAX5825AW P+	MAXIM	MAX58 25AWP +T	IC; DAC; ULTRA-SMALL; OCTAL CHANNEL; 12-BIT BUFFERED OUTPUT DAC WITH INTERNAL REFERENCE AND I2C INTERFACE; WLP20

80	U4	-	1	NC7WZ07P6X	FAIRCHILD SEMICONDUCTOR	NC7WZ07P6X	IC; BUF; TINY LOGIC ULTRA-HIGH SPEED DUAL BUFFER; SC70-6
81	U5	-	1	MAX1697UEUT+	MAXIM	MAX1697UEUT+	IC; INV; INVERTING CHARGE PUMP WITH SHUTDOWN; SOT23-6
82	U6, U8, U10, U12, U20	-	5	MAX44251AUA+	MAXIM	MAX44251AUA+	IC; OPAMP; ULTRA-PRECISION; LOW-NOISE OP AMP; UMAX8;
83	U22	-	1	MAX6071AAUT41+	MAXIM	MAX6071AAUT41+	IC; VREF; LOW NOISE; HIGH-PRECISION SERIES VOLTAGE REFERENCE; SOT23-6
84	U23	-	1	MAX11614EE+	MAXIM	MAX11614EE+	IC; ADC; LOW-POWER; 8-CHANNEL; I2C; 12-BIT ADC IN ULTRA-SMALL PACKAGE; QSOP16
85	U24, U25	-	2	MAX8512EXK+	MAXIM	MAX8512EXK+	IC, VREG, Ultra-Low-Noise, High PSRR, Adjustable Vout, SC70-5
86	U26	-	1	AT24CS02-SSHM	MICROCHIP	AT24CS02-SSHM	IC; EPROM; I2C-COMPATIBLE TWO-WIRE SERIAL EEPROM; 150MIL; NSOIC8
87	U27	-	1	MAX8880EUT+	MAXIM	MAX8880EUT+	IC; VREG; ULTRA-LOW-IQ LOW-DROPOUT LINEAR REGULATOR WITH POK; SOT23-6
88	PCB	-	1	MAX20356	MAXIM	PCB	PCB:MAX20356
89	MISC1, MISC2	DNI	2	AK67421-0.5	ASSMANN	AK67421-0.5	CONNECTOR; USB CABLE; MALE-MALE; USB 2.0; 5PINS-4PINS; 500MM
90	MISC3	DNI	1	MAXPICO2PMB#	MAXIM	MAXPICO2PMB#	ACCESSORY; BRD; PACKOUT; MAXPICO2PMB ADAPTER BOARD
TOTAL			438				

Part Number	Configuration	7-bit	8-bit Write	8-bit Read
MAX20356 (PMC)	ADDR[1:0] OTP Bitfield	0x40,0x44,0x48 OR 0x52 0b100xxx0	0x80,0x88,0x90 OR 0xA4 0b100xxx0	0x81,0x89,0x91 OR 0xA5 0b100xxx01
MAX20356 (PMC)	Maxim internal test mode	0x49 0b1001001	0x92 0b10010010	0x93 0b10010011
MAX11614 (ADC)	N/A	0x33 0b0110011	0x66 0b01101010	0x67 0b01101011
MAX9825 (DAC)	ADDR1=ADDR0-VDDIO	0x1F 0b0011111	0x3E 0b00111110, 0x10* 0b00101000	0x3F 0b00111111
AT24CS02 (EEPROM)	A0=A1=A2=GND	0x50** 0b01010000		0b101010001

*MAX9825 ALSO RESPONDS TO AN I2C BROADCAST ADDRESS 0b00101000

**AT24CS02 ALSO RESPONDS TO 0b10110001 FOR READING THE SERIAL NUMBER

CABLE

STAND OFF


MODULE

SHUNT

PROJECT TITLE		MAX2036_E-NCV_A	
DRAWING FILE	MAX2036_E-NCV_A.DWG	DATE	06-04-11
DESIGNED BY	MAXIMUS	REVIEWED BY	MAXIMUS
CHECKED BY	MAXIMUS	APPROVED BY	MAXIMUS

[illegible]

MAX20356 EV Kit Schematics (continued)

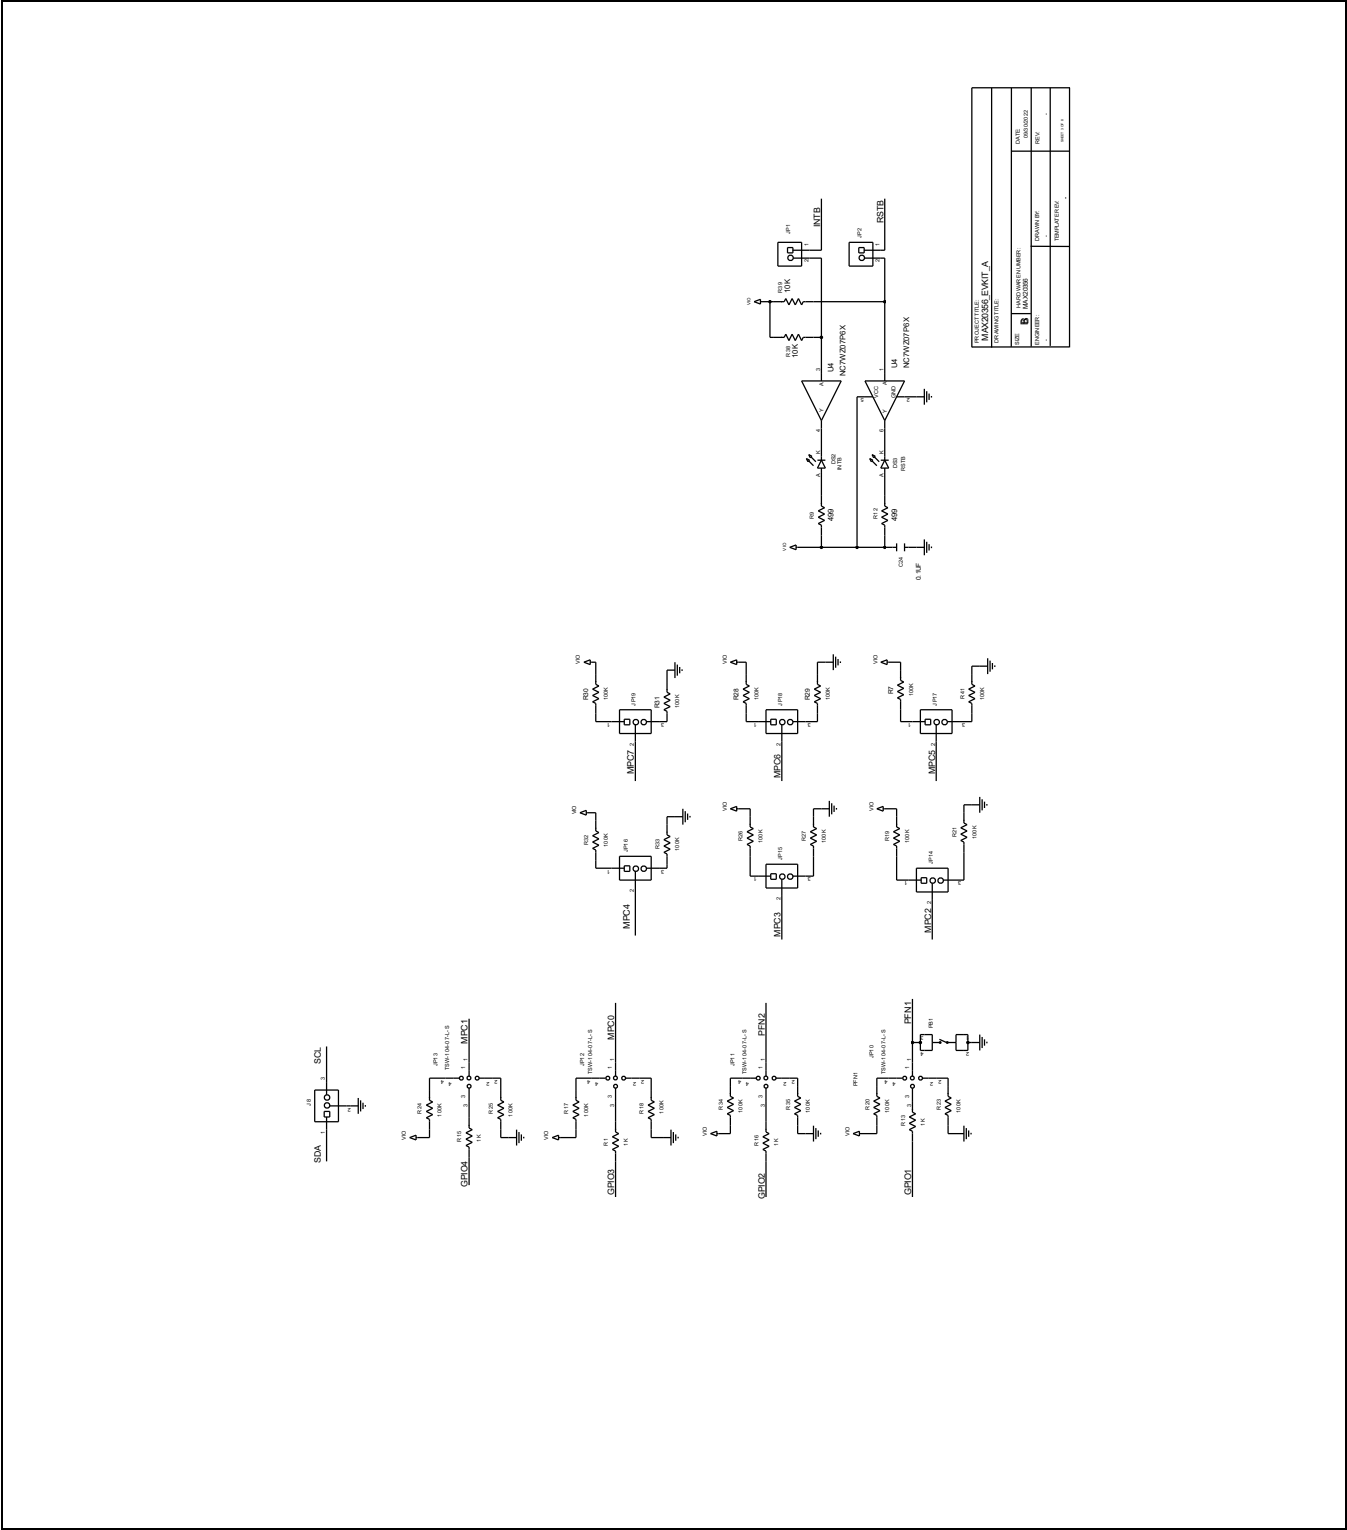

[illegible]

Two circuit diagrams for the MAX9286 EVKIT A. The top diagram shows the internal circuitry of the device, including a 5V regulator, a 2.5V regulator, a 3.3V LED, and a 3.3V LED. The bottom diagram shows the external circuitry, including a 5V regulator, a 2.5V regulator, a 3.3V LED, and a 3.3V LED. Both diagrams include a table of components and their values.

Component List:

REF ID	VALUE	DESCRIPTION
R172	10K	Resistor
R173	10K	Resistor
R174	10K	Resistor
R175	10K	Resistor
R176	10K	Resistor
R177	10K	Resistor
R178	10K	Resistor
R179	10K	Resistor
R180	10K	Resistor
R181	10K	Resistor
R182	10K	Resistor
R183	10K	Resistor
R184	10K	Resistor
R185	10K	Resistor
R186	10K	Resistor
R187	10K	Resistor
R188	10K	Resistor
R189	10K	Resistor
R190	10K	Resistor
R191	10K	Resistor
R192	10K	Resistor
R193	10K	Resistor
R194	10K	Resistor
R195	10K	Resistor
R196	10K	Resistor
R197	10K	Resistor
R198	10K	Resistor
R199	10K	Resistor
R200	10K	Resistor
R201	10K	Resistor
R202	10K	Resistor
R203	10K	Resistor
R204	10K	Resistor
R205	10K	Resistor
R206	10K	Resistor
R207	10K	Resistor
R208	10K	Resistor
R209	10K	Resistor
R210	10K	Resistor
R211	10K	Resistor
R212	10K	Resistor
R213	10K	Resistor
R214	10K	Resistor
R215	10K	Resistor
R216	10K	Resistor
R217	10K	Resistor
R218	10K	Resistor
R219	10K	Resistor
R220	10K	Resistor
R221	10K	Resistor
R222	10K	Resistor
R223	10K	Resistor
R224	10K	Resistor
R225	10K	Resistor
R226	10K	Resistor
R227	10K	Resistor
R228	10K	Resistor
R229	10K	Resistor
R230	10K	Resistor
R231	10K	Resistor
R232	10K	Resistor
R233	10K	Resistor
R234	10K	Resistor
R235	10K	Resistor
R236	10K	Resistor
R237	10K	Resistor
R238	10K	Resistor
R239	10K	Resistor
R240	10K	Resistor
R241	10K	Resistor
R242	10K	Resistor
R243	10K	Resistor
R244	10K	Resistor
R245	10K	Resistor
R246	10K	Resistor
R247	10K	Resistor
R248	10K	Resistor
R249	10K	Resistor
R250	10K	Resistor
R251	10K	Resistor
R252	10K	Resistor
R253	10K	Resistor
R254	10K	Resistor
R255	10K	Resistor
R256	10K	Resistor
R257	10K	Resistor
R258	10K	Resistor
R259	10K	Resistor
R260	10K	Resistor
R261	10K	Resistor
R262	10K	Resistor
R263	10K	Resistor
R264	10K	Resistor
R265	10K	Resistor
R266	10K	Resistor
R267	10K	Resistor
R268	10K	Resistor
R269	10K	Resistor
R270	10K	Resistor
R271	10K	Resistor
R272	10K	Resistor
R273	10K	Resistor
R274	10K	Resistor
R275	10K	Resistor
R276	10K	Resistor
R277	10K	Resistor
R278	10K	Resistor
R279	10K	Resistor
R280	10K	Resistor
R281	10K	Resistor
R282	10K	Resistor
R283	10K	Resistor
R284	10K	Resistor
R285	10K	Resistor
R286	10K	Resistor
R287		

PROJECT TITLE MAX20356 EWKIT_A		DATE 08/10/22	
DRAWING TITLE MAX20356		DRAWN BY REV	
ENGINEER		CHECKED BY	
DATE		DATE	


[illegible]

PROJECT TITLE MAX20356 EWKIT_A		DATE 08/10/22	
DRAWING TITLE MAX20356		DRAWN BY REV	
ENGINEER		CHECKED BY	
DATE		DATE	


[illegible]

PROJECT TITLE MAX20366, EVKIT_A		DATE 08/06/00 22	
DRAWING TITLE		DRAWN BY -	
		TEMP. AREA	


MAX2356 EV Kit Schematics (continued)

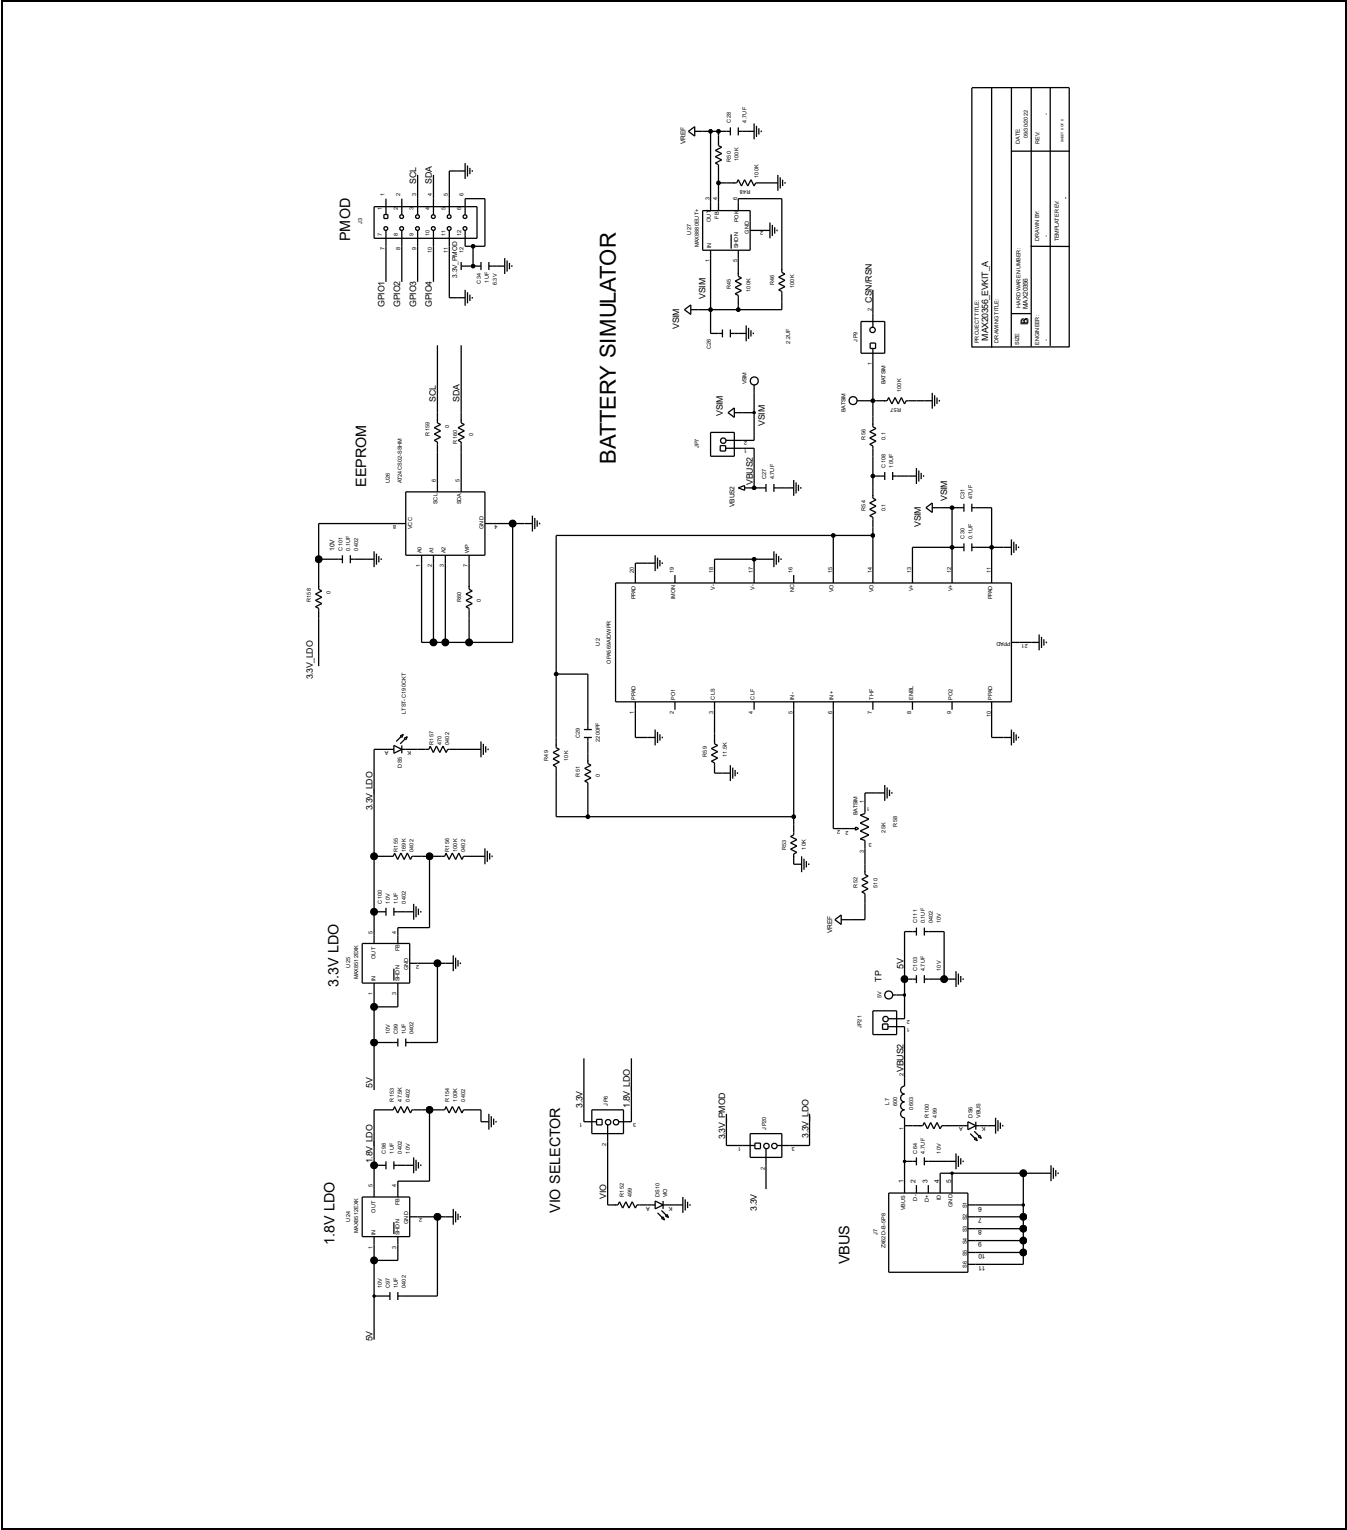


MAX20356 EV Kit PCB Layouts

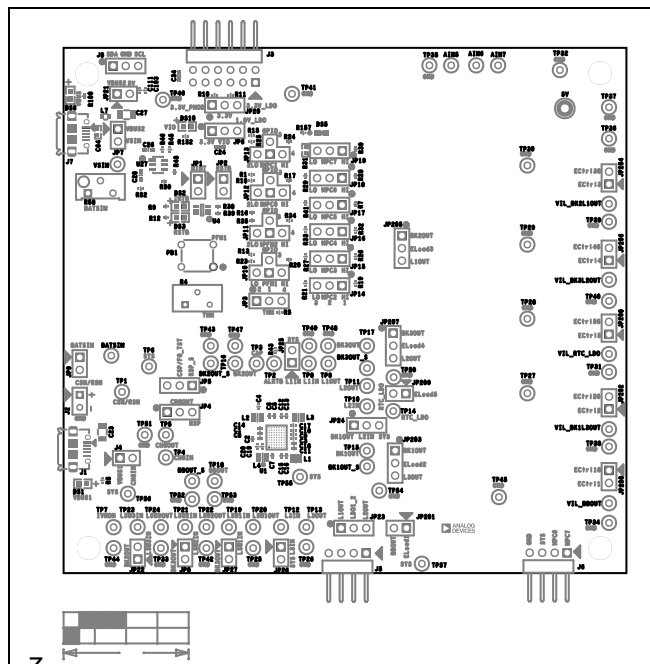


MAX20356 EV Kit Component Placement Guide—Top Silkscreen

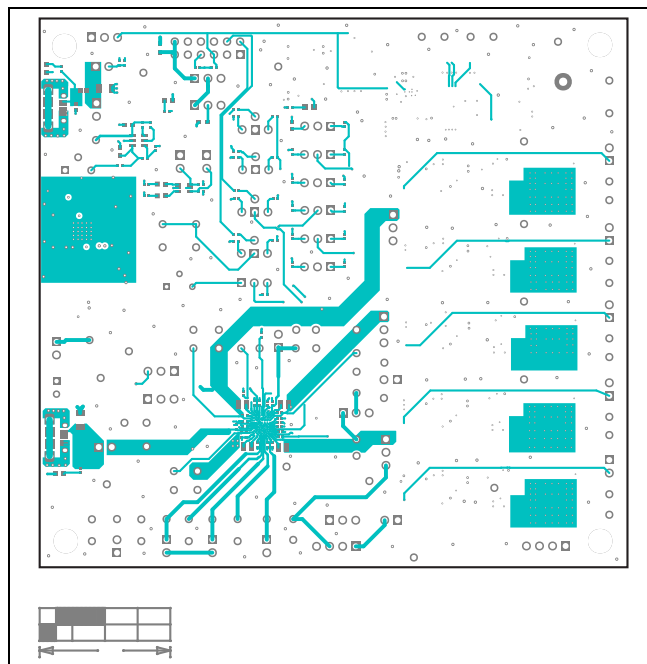

MAX20356 EV Kit PCB Layout—Top

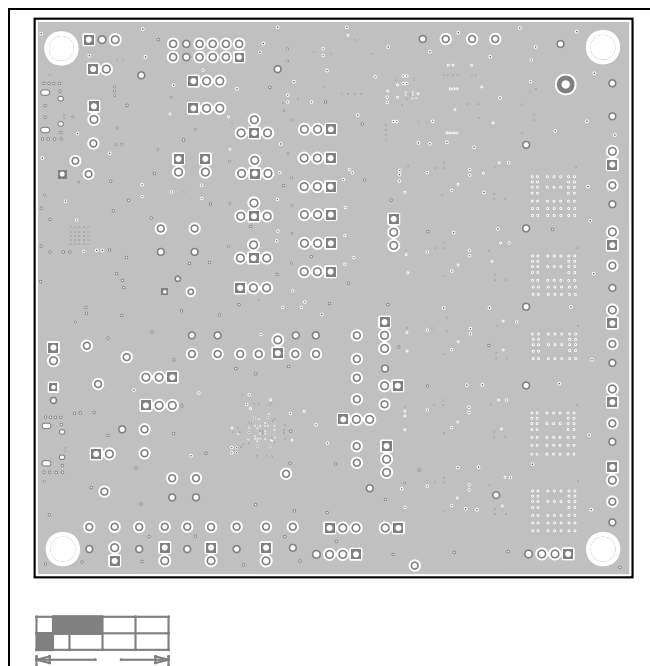


MAX20356 EV Kit PCB Layout—GND1

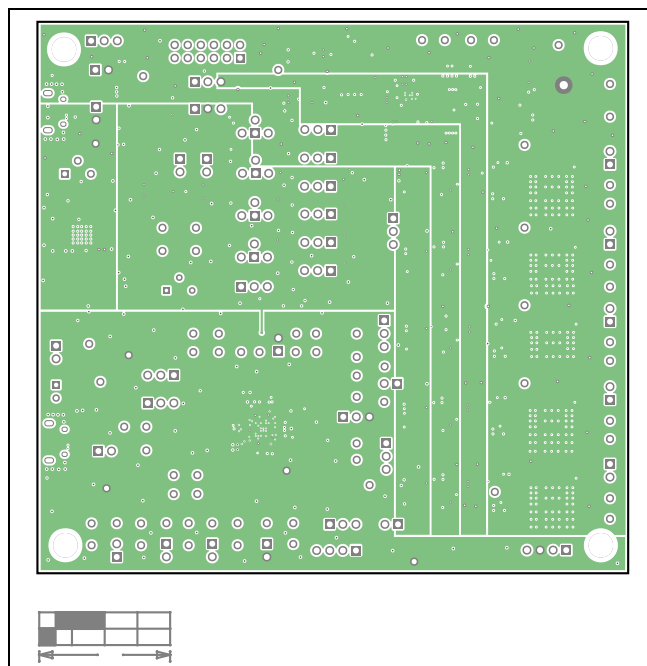


MAX20356 EV Kit PCB Layout—Power


MAX20356 EV Kit PCB Layouts (continued)

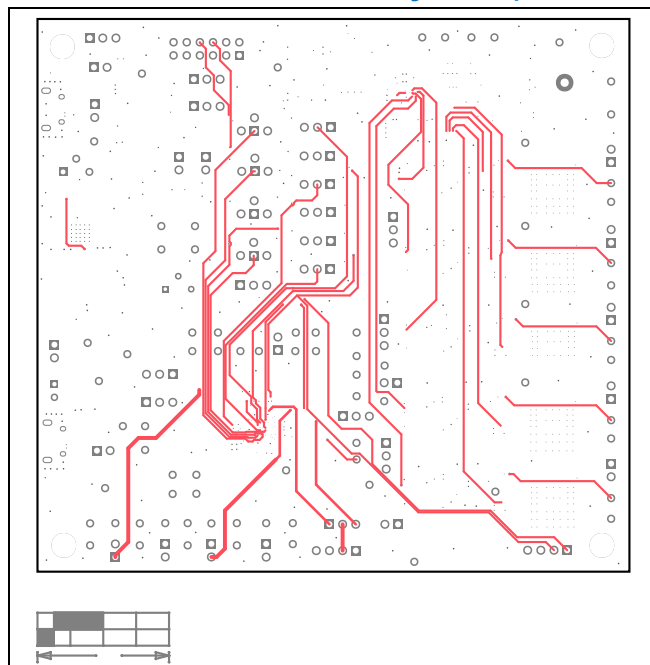


MAX20356 EV Kit PCB Layout—Signal

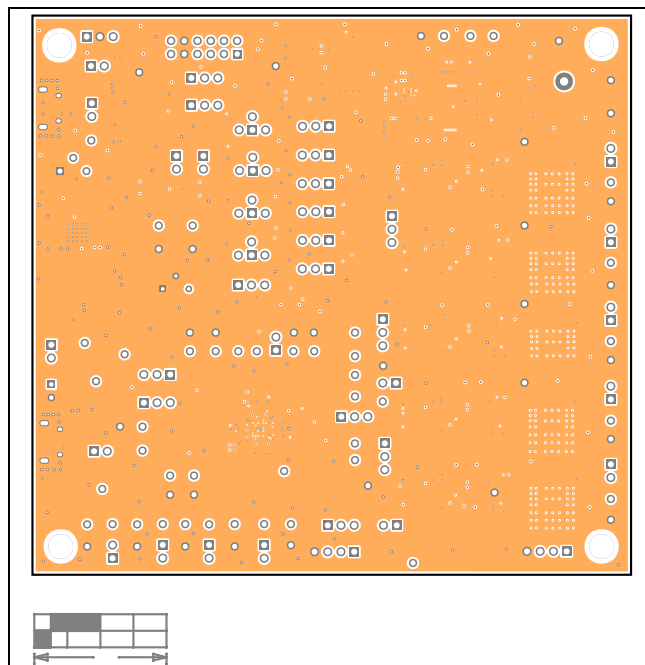

MAX20356 EV Kit PCB Layout—GND2

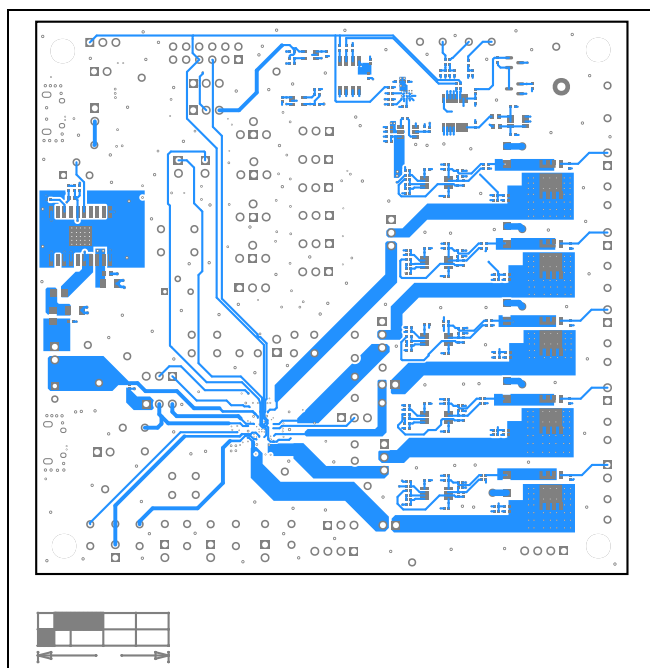

MAX20356 EV Kit PCB Layout—Bottom

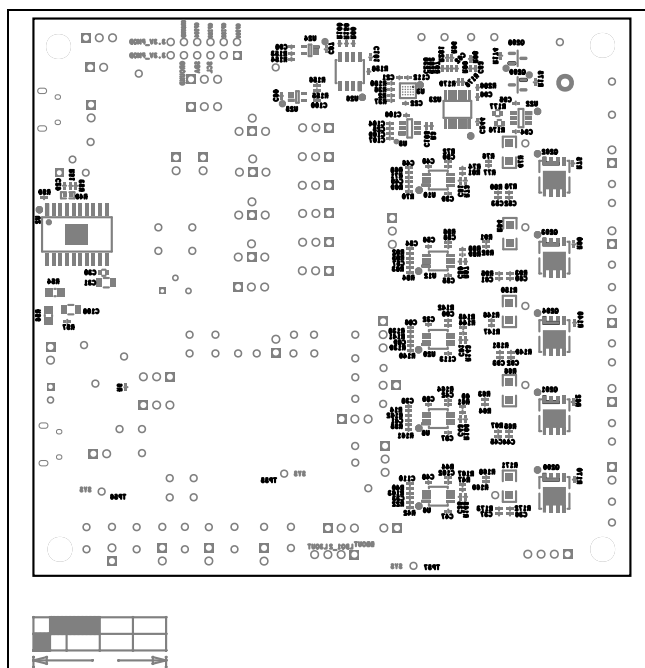

MAX20356 EV Kit Component Placement Guide—Bottom Silkscreen

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	1/23	Initial release	—
1	3/25	Added MAX20358	1

