

# Product data sheet

Specifications



Pilot light, Harmony 9001SK, plastic, polycarbonate, domed, green, 30mm, 110-120V

9001SKP1G9

## Main

Range of product	Harmony 9001SK
Product or component type	Pilot light
Device short name	9001SK
Lens type	Domed plastic
Light block supply	Via integral transformer 120 V AC 50/60 Hz 6 V)

## Complementary

Bezel material	Plastic
Mounting diameter	30 mm
Shape of signaling unit head	Round
Cap/operator or lens colour	Green
Light source	Incandescent
Bulb base	BA 9s
[Us] rated supply voltage	110...120 V AC 50/60 Hz
Tightening torque	0.8 N.m conforming to EN/IEC 60947-1
Shape of screw head	Cross slotted
Connections - terminals	Screw clamp terminals, 1 x 0.22...2 x 1.5 mm <sup>2</sup> conforming to EN/IEC 60947-1
[Ith] conventional free air thermal current	10 A
Short-circuit protection	10 A cartridge fuse conforming to EN/IEC 60947-5-1
[Ui] rated insulation voltage	250 V (pollution degree 2) conforming to EN/IEC 60947-1
[Uiimp] rated impulse withstand voltage	2.5 kV conforming to EN/IEC 60947-1
Operating position	Any position
CAD overall width	54 mm
CAD overall height	70 mm
CAD overall depth	42 mm
Product weight	0.181 kg
Device presentation	Complete product
Lens type	Domed
[Us] rated supply voltage	110...120 V
Light block supply	Via integral transformer
Supply frequency	50...60 Hz

<b>Lens material</b>	Polycarbonate
<b>Size</b>	30 mm
<b>Light source</b>	Incandescent bulb

## Environment

<b>Electrical shock protection class</b>	Class II conforming to IEC 61140
<b>Protective treatment</b>	TC
<b>IP degree of protection</b>	IP66 conforming to IEC 60529
<b>NEMA degree of protection</b>	NEMA 1 NEMA 12 NEMA 13 NEMA 2 NEMA 3 NEMA 3R NEMA 4 NEMA 4X
<b>Vibration resistance</b>	7 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
<b>Shock resistance</b>	50 gn conforming to IEC 60068-2-27
<b>Ambient air temperature for operation</b>	-25...70 °C
<b>Ambient air temperature for storage</b>	-40...70 °C
<b>Standards</b>	JIS C 852 CSA C22.2 No 14 EN/IEC 60947-5-1 EN/IEC 60947-1 JIS C8201-5-1 UL 508 EN/IEC 60947-5-4 JIS C8201-1
<b>Product certifications</b>	UL 508 NEMA

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	4.572 cm
<b>Package 1 Width</b>	5.588 cm
<b>Package 1 Length</b>	9.398 cm
<b>Package 1 Weight</b>	163.293 g

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

California proposition 65 WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

## Use Again

### Repack and remanufacture


End of life manual availability [End of Life Information](#)

Take-back No

WEEE Label The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Dimensions Drawings

## Dimensions

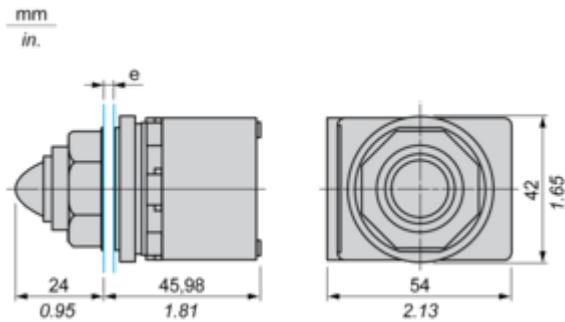

$e$  panel thickness: 1 to 6 mm / 0.04 to 0.24 in.

Image of product / Alternate images

Alternative

---



