

Product data sheet

Specifications



socket equipped with LED and protection circuit, Harmony Electromechanical Relays, for RSL1 relays, screw connec to r, 230V AC DC

RSLZVA4

Main

Range of product	Harmony Electromechanical Relays
Device short name	RSLZ
Product or component type	Socket
Device presentation	Basic element
Product compatibility	Plug-in relay RSL with 1 C/O contact at 60 V DC Plug-in relay RSL
Contacts type and composition	1 C/O
[Ith] conventional free air thermal current	6 A
Switching voltage	230 V AC/DC
Rated operational voltage limits	184...264.5 V
[Ue] rated operational voltage	< 300 V AC

Complementary

Group of product	RSL_CON_230
Shape of pin	Flat
Contact terminal arrangement	Separate
Connections - terminals	Connector, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 14) flexible with cable end Connector, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 14) solid without cable end
Compatibility code	RSLZ
Tightening torque	< 0.4 N.m for M2.5 screw(s)
Fixing mode	Plastic compression spring (35 mm symmetrical DIN rail)
[Uiimp] rated impulse withstand voltage	3.6 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
CAD overall width	6.2 mm
CAD overall height	78.6 mm
CAD overall depth	95 mm
Product weight	0.023 kg

Environment

IP degree of protection	IP20 conforming to IEC 60529
Standards	IEC 61984 UL 508
Product certifications	GOST CSA
Marking	CE
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.700 cm
Package 1 Width	8.000 cm
Package 1 Length	10.200 cm
Package 1 Weight	23.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	8.500 cm
Package 2 Width	7.000 cm
Package 2 Length	10.700 cm
Package 2 Weight	261.000 g
Unit Type of Package 3	S03
Number of Units in Package 3	300
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	8.380 kg

Contractual warranty

Warranty	18 months
----------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint

1

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

Use Again


Repack and remanufacture

Take-back


No

Dimensions Drawings

Dimensions

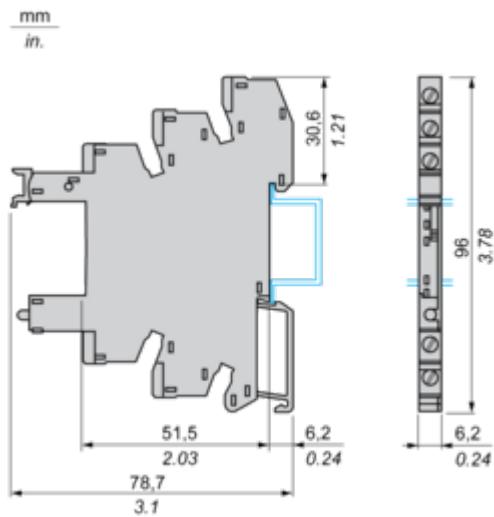


Connections and Schema

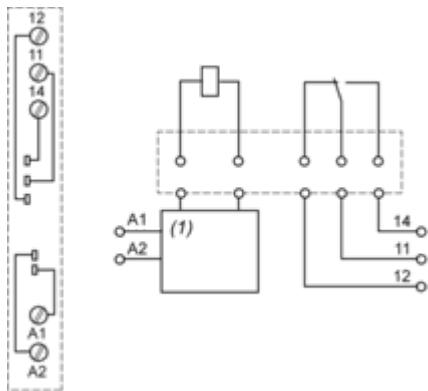Wiring Diagram

(1) Protection circuit

Example of RSLZ2 Bus Jumper Mounting on Sockets

Side View

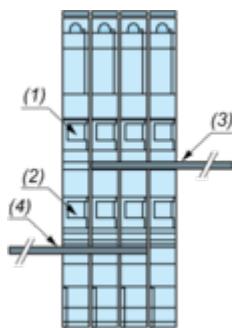

(1) A1

(2) A2

(3) Bus jumper polarity A1

(4) Bus jumper polarity A2

Technical Illustration

Dimensions

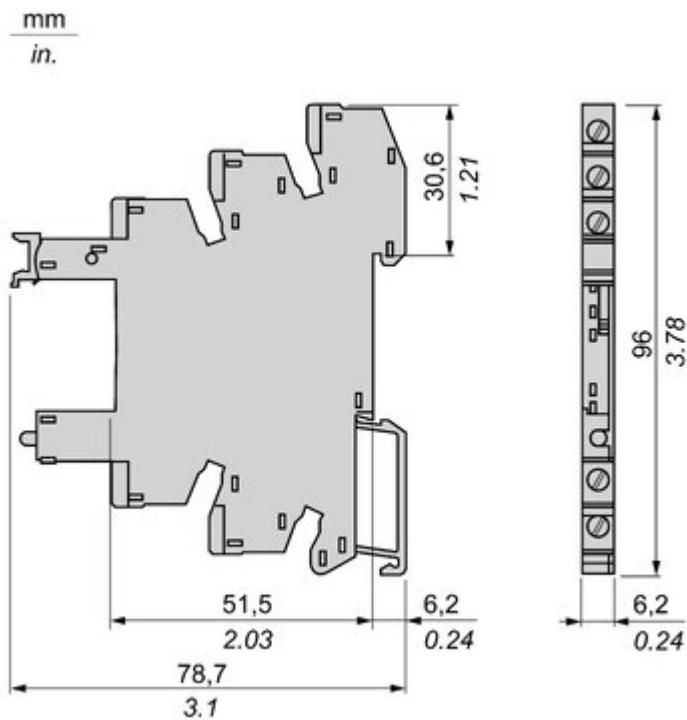


Image of product / Alternate images

Alternative

