



PANEL CUTOUT



PANEL THICKNESS	(x)
0.75 - 1.25	30.0
1.25 - 2.00	30.4
2.00 - 3.00	30.7

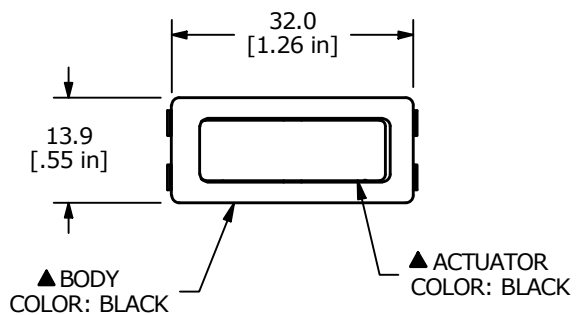

SWITCH FUNCTION		
POS. 3	POS. 2	POS. 1
ON	OFF	ON
2,3	OPEN	1,2

NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
- ▲ 5. CONTACT RATINGS:
ANSI/UL 1054
16A @ 125/250VAC [cURus]
6. CONTACT RESISTANCE: 20mΩ MAX. @ 50VAC INITIAL
7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
8. DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [cURus]
10. OPERATING TEMPERATURE: 0°C to 65°C [cURus]
- ▲ 11. ILLUMINATION VOLTAGE: NON-ILLUMINATED
12. ▲ DENOTES CRITICAL PARAMETER

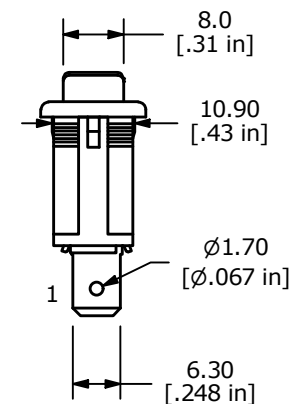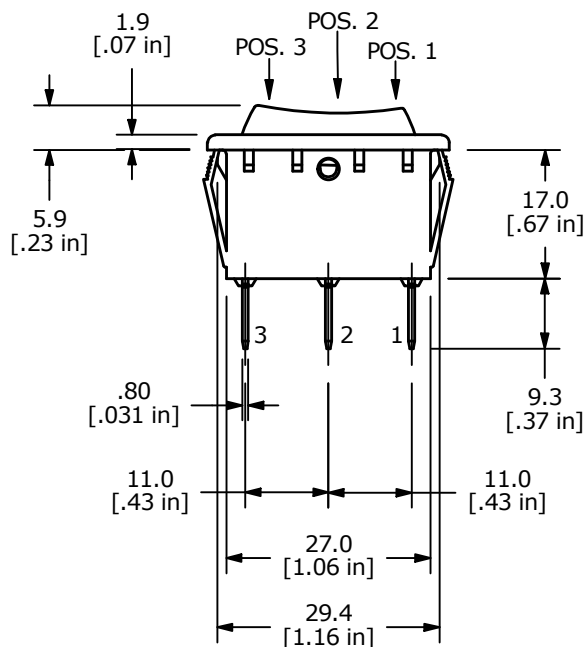

REV	ECO NO	DESCRIPTION	DATE	BY
D	ECO-101928	UPDATE HOUSING	06/07/23	JS



OBJECT ID
000000289

TITLE RB145E1100		SCALE 1:1	DATE 10/1/2010	DR CAB	DWG 14-RB145E1100	REV D
---------------------	--	--------------	-------------------	-----------	----------------------	----------