


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	9579200602	~

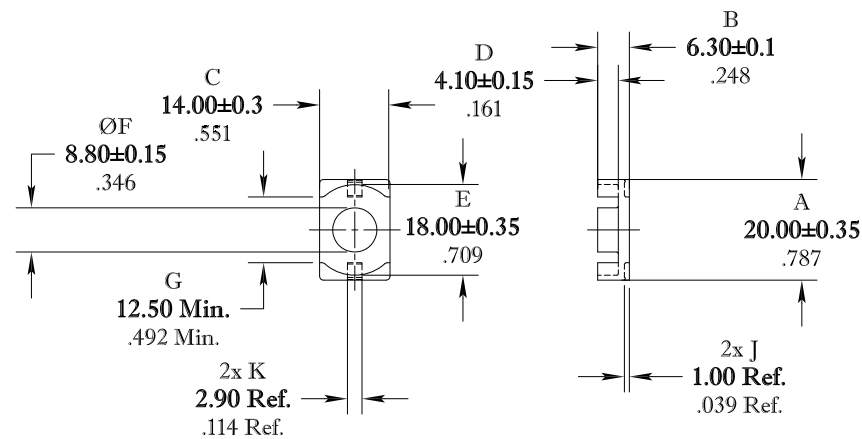

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS

$\Sigma l/A(\text{mm}^{-1})$	$l_e(\text{mm})$	$A_e(\text{mm}^2)$	$A_{\text{Min}}(\text{mm}^2)$	$V_e(\text{mm}^3)$	$A_L(\text{nH})$ @ 10 kHz <10gauss	$\tan \delta/\mu_i$ @ 500 kHz <1gauss
0.553	33.3	60.0	55.0	2000	2440±25%	≤15X10E-6

MATE PAIR: CLAMPING FORCE = 5 lbs.

POWER LOSS @ 100°C

f = 500 kHz, 500g P.L. < 0.36 Watts

FAIR-RITE PRODUCTS CORP.						
TITLE "EQ" CORE						
DRAWN BY D. FOOTE	DATE 10-21-2024	SIZE	PART NO.	REV.		
CHKD BY		B	9579200602	~		
APPRVD BY		SCALE	NONE	SHEET	1 of 1	

FR# 79