PART NUMBER	APPLICABLE WIRE SIZE (SINGLE CRIMP)	GRIP DIMENSIONS		MASS (g)
	METRIC (mm²)	W1	W2	
7196-1366-02	0.13	1.38	1.73	(0.11)
7196-1367-02	0.35 - 0.50	1.80	2.62	(0.13)
7196-1368-02	0.75 - 1.00	2.47	3.26	(0.15)
7196-1369-02	1.50	2.94	3.83	(0.16)

APPLICABLE WIRE SIZE MARK

(10/1)



7196-1366-02

(10/1)



7196-1367-02

(10/1)



7196-1368-02

(10/1)



7196-1369-02





FRONT ISOMETRIC VIEW
(5/1)



REAR ISOMETRIC VIEW
(5/1)



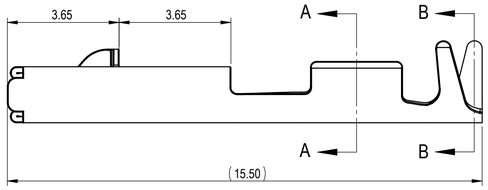



SECTION A-A



SECTION B-B

NOTES:

1. PARTS MUST BE PURCHASED FROM YAZAKI.
2. PARTS MUST BE FREE OF BURRS OR SHARP EDGES THAT MAY BE DETRIMENTAL TO SATISFACTORY ASSEMBLY, SAFE HANDLING OR FUNCTION OF THE PART.
3. MATERIAL: COPPER ALLOY
4. PLATING: TIN (Sn) PLATED
5. MATING PART NUMBER: 7195-1371-02:R DRAWING
6. △1 PART SATISFIES PF.90012, REV B, 10-APR-2017 (T2/V1/S1) (UTILIZES USCAR-2 RESISTANCE CRITERIA, 15mΩ MAX.)
7. PART TO COMPLY WITH YPES-31-038 REQUIREMENTS
8. THIS DRAWING IS TO BE USED FOR INTERNAL YAZAKI PSW SUBMISSION.
9. HANDLING MANUAL NUMBER: YPES-15-1673E

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
△1	12-04-2019	REVISED NOTE	C19-AA39	A.C.
-	09-17-2018	NEW	C18-A895	S.A.

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	250OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	ANGLE	ECCENT
A	±0.15	±0.20	±0.30	±0.50	±0.75	±0.20	±0.30	±0.50	±2.50	±3°	0.1
B	±0.20	±0.30	±0.55	±0.95	±1.40					±3°	0.1
Ⓒ	±0.30	±0.50	±0.80	±1.40	±2.00					±3°	0.15
SPECIFIED										MASS	SEE TABLE

CUSTOMER					
CUSTOMER PART NO.		CUSTOMER DWG NO.			
OFFICE	YNA	TRIAL PART NO.			
VENDOR					
VENDOR NO.					
DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	7196-1367-02:M △1	09-17-2018	mm	10/1	3
APPROVED	CHECKED	CHECKED	DESIGN	DRAWN	
Jeremy Gagnon Digitally signed by Jeremy Gagnon Date: 2019.12.10 15:56:24 -05'00'	James Littek 2019.12.10 11:14:39 -05'00'		W. LOK 03-05-2018	ALEJANDRO CALLEROS 12-04-2019	

MATL. SPEC.	SEE NOTES	TREAT. & FIN.	SEE NOTES
NAME	1.2mm YCO FEMALE TERMINAL		
PART NO. CH. CODE	7196-1367-02, ETC.		
DWG NO.	7196-1367-02:R		
	YAZAKI CORPORATION		