

XTV 6-TWIN-PE - Protective conductor terminal block



1329507

<https://www.phoenixcontact.com/us/products/1329507>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Protective conductor terminal block, number of connections: 3, number of positions: 1, connection method: Push-X-connection, Rated cross section: 6 mm², cross section: 0.5 mm² - 10 mm², mounting type: NS 35/7,5, NS 35/15, color: green-yellow



Your advantages

- Maximum ease of use thanks to the effortless and tool-free Push-X technology
- Quick installation of all types of conductors with and without ferrule
- Open clamping chambers guarantee quick wiring on site
- Clear identification of the conductor connection
- Full flexibility thanks to the standardized CLIPLINE complete bridging, marking, and testing accessories
- Meet the requirements of DIN EN 60947-7-2 or IEC 60947-7-2 for protective conductor connections
- High level of safety thanks to the low-resistance connection to the ground potential via the top-hat rail
- Direct contacting with the DIN rail enables fast, error-free grounding without additional wiring effort

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1329507 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | BE25 |
| Product key | BE2522 |
| GTIN | 4063151622541 |
| Weight per piece (including packing) | 28.614 g |
| Weight per piece (excluding packing) | 26 g |
| Customs tariff number | 85369010 |
| Country of origin | CN |

XTV 6-TWIN-PE - Protective conductor terminal block

1329507

<https://www.phoenixcontact.com/us/products/1329507>



Technical data

Product properties

| | |
|-----------------------|---|
| Product type | Ground terminal block |
| Product family | XTV |
| Area of application | Railway industry Machine building Plant engineering |
| Number of positions | 1 |
| Number of connections | 3 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|------|
| Rated surge voltage | 8 kV |
| Maximum power dissipation for nominal condition | 0 W |

Connection data

| | |
|---|--|
| Number of connections per level | 3 |
| Nominal cross section | 6 mm ² |
| Connection method | Push-X-connection |
| Stripping length | 10 mm ... 12 mm |
| Internal cylindrical gage | A5 B4 |
| Connection in acc. with standard | IEC 60947-7-2 |
| Conductor cross-section rigid | 0.5 mm ² ... 10 mm ² |
| Cross section AWG | 20 ... 8 (converted acc. to IEC) |
| Conductor cross-section flexible | 1.5 mm ² ... 10 mm ² |
| Conductor cross-section, flexible [AWG] | 14 ... 8 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 1.5 mm ² ... 6 mm ² |
| Flexible conductor cross-section (ferrule with plastic sleeve) | 1.5 mm ² ... 6 mm ² |
| Nominal cross section | 6 mm ² |

Dimensions

| | |
|--------------------|---------|
| Width | 8.2 mm |
| End cover width | 2.2 mm |
| Height | 76.7 mm |
| Depth | 57.6 mm |
| Depth on NS 35/7,5 | 59.1 mm |
| Depth on NS 35/15 | 66.6 mm |

XTV 6-TWIN-PE - Protective conductor terminal block



1329507

<https://www.phoenixcontact.com/us/products/1329507>

Material specifications

| | |
|--|--------------|
| Color | green-yellow |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Oscillation/broadband noise

| | |
|------------------------|--|
| Specification | DIN EN 50155 (VDE 0115-200):2018-05 |
| Spectrum | Long life test category 2, bogie-mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level | $6.12 \text{ (m/s}^2\text{)}^2/\text{Hz}$ |
| Acceleration | 3.12g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

Shocks

| | |
|--------------------------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2018-05 |
| Pulse shape | Half-sine |
| Acceleration | 30g |
| Shock duration | 18 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

Ambient conditions

| | |
|---|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |

XTV 6-TWIN-PE - Protective conductor terminal block

1329507

<https://www.phoenixcontact.com/us/products/1329507>



| | |
|--|-----------------|
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-2 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

XTV 6-TWIN-PE - Protective conductor terminal block


1329507

<https://www.phoenixcontact.com/us/products/1329507>



Drawings

Circuit diagram

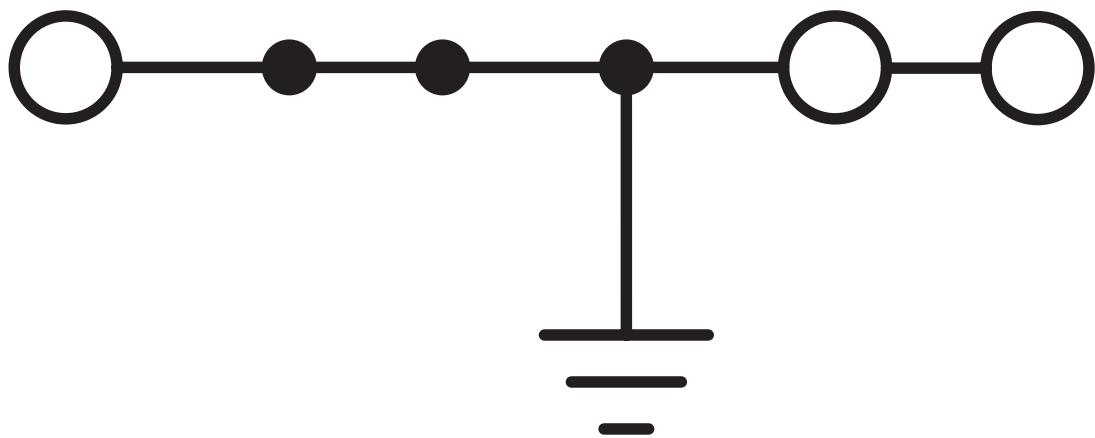

XTV 6-TWIN-PE - Protective conductor terminal block

1329507

<https://www.phoenixcontact.com/us/products/1329507>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1329507>

| | | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|---|--|-----------------------|-----------------------|-------------------|----------------------|
| B | | - | - | 14 - 8 | - |
| C | | - | - | 14 - 8 | - |

| | | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|---|--|-----------------------|-----------------------|-------------------|----------------------|
| B | | - | - | 14 - 8 | - |
| C | | - | - | 14 - 8 | - |

| DNV | | Approval ID: TAE000050T |
|-----|--|-------------------------|
| | | |

XTV 6-TWIN-PE - Protective conductor terminal block

1329507

<https://www.phoenixcontact.com/us/products/1329507>



Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27250103 |
| ECLASS-15.0 | 27250103 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000901 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

XTV 6-TWIN-PE - Protective conductor terminal block

1329507

<https://www.phoenixcontact.com/us/products/1329507>



Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com