



## **Model 66213RPZ1**

**Low cost embeddable accelerometer, 3-wire, MicroPower, 100 mV/g, TO5 housing, positive output, header pins**

### **Installation and Operating Manual**

**For assistance with the operation of this product,  
contact the PCB Piezotronics, Inc.**

**Toll-free: 800-959-4464  
24-hour SensorLine: 716-684-0001  
Fax: 716-684-3823  
E-mail: [imi@pcb.com](mailto:imi@pcb.com)  
Web: [www.imi-sensors.com](http://www.imi-sensors.com)**



Model Number  
66213RPZ1

## 3 WIRE LOW POWER EMBEDDABLE INDUSTRIAL ACCELEROMETER

Revision: NR  
ECN #: 54702

### Performance

|                              |               |                             |        |
|------------------------------|---------------|-----------------------------|--------|
| Sensitivity( $\pm 20\%$ )    | 100 mV/g      | 10.2 mV/(m/s <sup>2</sup> ) | [1][2] |
| Measurement Range            | $\pm 12.5$ g  | $\pm 123$ m/s <sup>2</sup>  |        |
| Frequency Range( $\pm 3$ dB) | 2 to 12.5k Hz | 2 to 12.5k Hz               | [3][4] |
| Resonant Frequency           | > 25 kHz      | > 25 kHz                    | [4]    |
| Broadband Resolution         | 400 $\mu$ g   | 3.9 mm/s <sup>2</sup>       | [5]    |
| Non-Linearity                | $\leq 1\%$    | $\leq 1\%$                  | [6]    |
| Transverse Sensitivity       | $\leq 7\%$    | $\leq 7\%$                  |        |

### Environmental


|                              |                |                         |     |
|------------------------------|----------------|-------------------------|-----|
| Overload Limit(Shock)        | 5,000 g pk     | 49k m/s <sup>2</sup> pk |     |
| Temperature Range(Operating) | -65 to +250 °F | -54 to +121 °C          |     |
| Temperature Response         | See Graph      | See Graph               | [5] |

### Electrical

|                                              |                                |                                                 |     |
|----------------------------------------------|--------------------------------|-------------------------------------------------|-----|
| Settling Time(Within 10% of the output bias) | 350 $\mu$ s                    | 350 $\mu$ s                                     | [5] |
| Discharge Time Constant                      | $\geq 0.08$ sec                | $\geq 0.08$ sec                                 |     |
| Excitation Voltage                           | 3 to 5.5 VDC                   | 3 to 5.5 VDC                                    |     |
| Output Impedance                             | < 1,000 Ohm                    | < 1,000 Ohm                                     |     |
| Current Draw                                 | 60 $\mu$ A                     | 60 $\mu$ A                                      | [5] |
| Output Bias Voltage( $\pm 5\%$ )             | 1.5 VDC                        | 1.5 VDC                                         |     |
| Spectral Noise(10 Hz)                        | 24 $\mu$ g/ $\sqrt{\text{Hz}}$ | 235 ( $\mu\text{m/sec}^2$ )/ $\sqrt{\text{Hz}}$ | [5] |
| Spectral Noise(100 Hz)                       | 8 $\mu$ g/ $\sqrt{\text{Hz}}$  | 78 ( $\mu\text{m/sec}^2$ )/ $\sqrt{\text{Hz}}$  | [5] |
| Spectral Noise(1 kHz)                        | 4 $\mu$ g/ $\sqrt{\text{Hz}}$  | 39 ( $\mu\text{m/sec}^2$ )/ $\sqrt{\text{Hz}}$  | [5] |

### Physical

|                                |                     |                     |
|--------------------------------|---------------------|---------------------|
| Size (Lip Diameter x Height)   | 0.36 x 0.38 in      | 9.1 mm x 9.7 mm     |
| Weight                         | 0.1 oz              | 3 gm                |
| Mounting                       | Adhesive/Solder     | Adhesive/Solder     |
| Sensing Element                | Ceramic             | Ceramic             |
| Sensing Geometry               | Shear               | Shear               |
| Housing Material               | Stainless Steel     | Stainless Steel     |
| Sealing                        | Welded Hermetic     | Welded Hermetic     |
| Electrical Connector           | Header Pins         | Header Pins         |
| Electrical Connection Position | Bottom              | Bottom              |
| Electrical Connections(Pin 1)  | Acceleration Output | Acceleration Output |
| Electrical Connections(Pin 2)  | Case                | Case                |
| Electrical Connections(Pin 3)  | Neg (-) Ground      | Neg (-) Ground      |
| Electrical Connections(Pin 4)  | Pos (+) Power       | Pos (+) Power       |

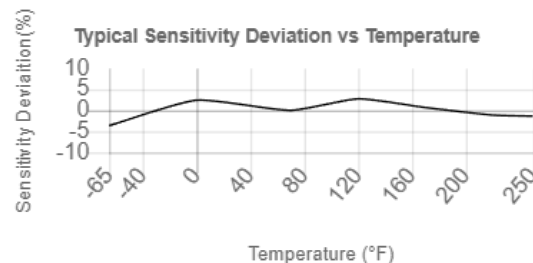

CE  
UK  
CA<sup>[7]</sup>

All specifications are at room temperature unless otherwise specified.  
In the interest of constant product improvement, we reserve the right to change specifications without notice.

### OPTIONAL VERSIONS

Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

### NOTES:

- [1]Positive output along Z-axis (in upward direction when pin mounted).
- [2]Conversion Factor 1g = 9.81 m/s<sup>2</sup>.
- [3]The high frequency tolerance is accurate within  $\pm 10\%$  of the specified frequency.
- [4]Performance depends on mounting
- [5]Typical.
- [6]Zero-based, least-squares, straight line method.
- [7]See PCB Declaration of Conformance PS274 for details

### SUPPLIED ACCESSORIES:

Model ICS-2 NIST-traceable single-point amplitude response calibration at 6000 cpm (100 Hz) for each axis (1)

|                  |                  |                  |                  |              |
|------------------|------------------|------------------|------------------|--------------|
| Entered: ND      | Engineer: LAB    | Sales: JL        | Approved: NJF    | Spec Number: |
| Date: 04/17/2024 | Date: 04/17/2024 | Date: 04/17/2024 | Date: 04/17/2024 | 78745        |

**IMI SENSORS**  
A PCB PIEZOTRONICS DIV.  
3425 Walden Avenue, Depew, NY 14043

Phone: 800-959-4464  
Fax: 716-684-3823  
E-Mail: [imi@pcb.com](mailto:imi@pcb.com)

2



1

PCB Piezotronics Inc. claims proprietary rights in the information disclosed hereon. Neither it nor any reproduction thereof will be disclosed to others without the written consent of PCB Piezotronics Inc.

## REVISIONS

| REV | DESCRIPTION                  | DIN   |
|-----|------------------------------|-------|
| A   | ADD FIELD NOTE 1 TO CASE PIN | 55601 |

78683

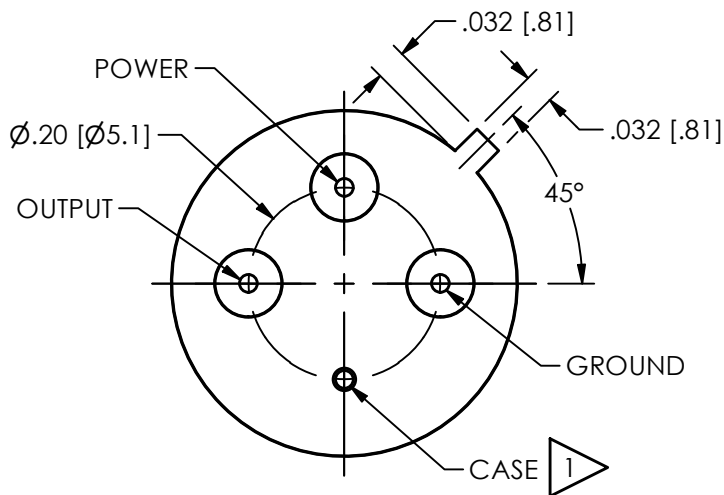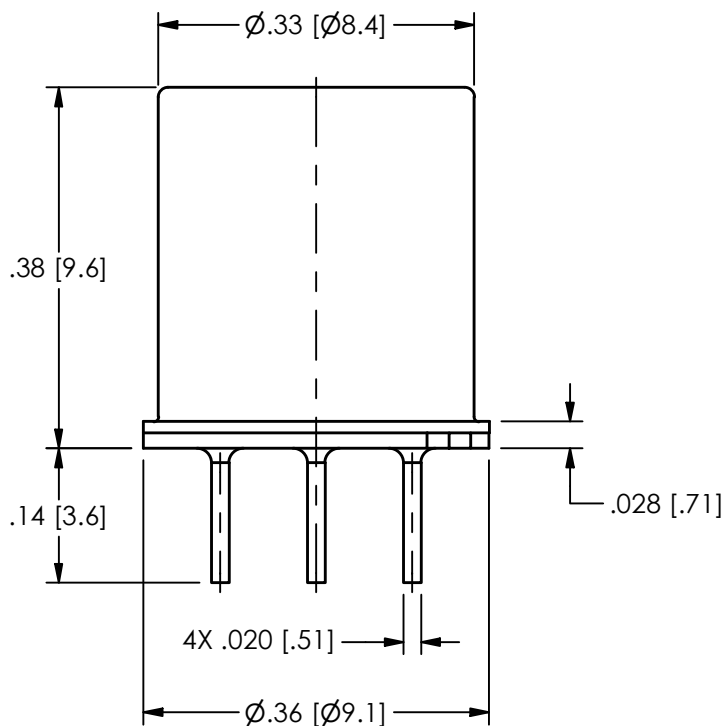

1 DO NOT CONNECT CASE TO ANY OTHER CONNECTION POINT INCLUDING GROUND OR EARTH GROUND

## UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:

## DRAWN

## CHECKED

## ENGINEER



**PCB PIEZOTRONICS**  
AN AMPHENOL COMPANY

3425 WALDEN AVE. DEPEW, NY 14043

(716) 684-0001 E-MAIL: sales@pcb.com

CODE  
IDENT. NO.  
52681

SIZE  
A

DWG. NO.  
78683

SCALE: 5X

SHEET 1 OF 1

DIMENSIONS IN INCHES  
DECIMALS XX ±.03  
XXX ±.010  
ANGLES ± 2 DEGREES

DIMENSIONS IN MILLIMETERS  
[IN BRACKETS]  
DECIMALS X ± 0.8  
XX ± 0.25  
ANGLES ± 2 DEGREES

CABLE TOLERANCES IN ENGLISH  
1" ≤ LENGTH < 1' = +1" / - 0  
1' ≤ LENGTH < 5' = +2" / - 0  
5' ≤ LENGTH < 100' = +6" / - 0  
100' ≤ LENGTH = +1' / - 0

CABLE TOLERANCES IN METRIC  
2.54cm ≤ LENGTH < 30.5cm = +2.54cm / - 0  
30.5cm ≤ LENGTH < 1.5m = +5.1cm / - 0  
1.5m ≤ LENGTH < 30.5m = +15.2cm / - 0  
30.5m ≤ LENGTH = +30.5cm / - 0

FILLETS AND RADII  
.003 - .005

FILLETS AND RADII  
0.07 - 0.13

TITLE  
OUTLINE DRAWING  
MODEL 660 SERIES  
LOW POWER 3-WIRE ACCELEROMETER

2

1

## Repair and Maintenance

PCB guarantees Total Customer Satisfaction through its “Lifetime Warranty Plus” on all Platinum Stock Products sold by PCB and through its limited warranties on all other PCB Stock, Standard and Special products. Due to the sophisticated nature of our sensors and associated instrumentation, **field servicing and repair is not recommended and, if attempted, will void the factory warranty.**

Beyond routine calibration and battery replacements where applicable, our products require no user maintenance. Clean electrical connectors, housings, and mounting surfaces with solutions and techniques that will not harm the material of construction. Observe caution when using liquids near devices that are not hermetically sealed. Such devices should only be wiped with a dampened cloth—never saturated or submerged.

In the event that equipment becomes damaged or ceases to operate, our Application Engineers are here to support your troubleshooting efforts 24 hours a day, 7 days a week. Call or email with model and serial number as well as a brief description of the problem.

## Calibration

Routine calibration of sensors and associated instrumentation is necessary to maintain measurement accuracy. We recommend calibrating on an annual basis, after exposure to any extreme environmental influence, or prior to any critical test.

PCB Piezotronics is an ISO-9001 certified company whose calibration services are accredited by A2LA to ISO/IEC 17025, with full traceability to SI through N.I.S.T. In addition to our standard calibration services, we also offer specialized tests, including: sensitivity at elevated or cryogenic temperatures, phase response, extended high or low frequency response, extended range, leak testing, hydrostatic pressure testing, and others. For more information, contact your local PCB Piezotronics distributor, sales representative, or factory customer service representative.

## Returning Equipment

If factory repair is required, our representatives will provide you with a Return Material Authorization (RMA) number, which we use to reference any information you have already provided and expedite the repair process. This number should be clearly marked on the outside of all returned package(s) and on any packing list(s) accompanying the shipment.

## Contact Information

PCB Piezotronics, Inc.  
3425 Walden Ave.  
Depew, NY14043 USA  
Toll-free: (800) 828-8840  
24-hour SensorLine: (716) 684-0001  
General inquiries: [info@pcb.com](mailto:info@pcb.com)  
Repair inquiries: [rma@pcb.com](mailto:rma@pcb.com)

For a complete list of distributors, global offices and sales representatives, visit our website, [www.pcb.com](http://www.pcb.com).

## Safety Considerations

This product is intended for use by qualified personnel who recognize shock hazards and are familiar with the precautions required to avoid injury. While our equipment is designed with user safety in mind, the protection provided by the equipment may be impaired if equipment is used in a manner not specified by this manual.

Discontinue use and contact our 24-Hour Sensorline if:

- Assistance is needed to safely operate equipment
- Damage is visible or suspected
- Equipment fails or malfunctions

For complete equipment ratings, refer to the enclosed specification sheet for your product.

## Definition of Terms and Symbols

The following symbols may be used in this manual:



### DANGER

Indicates an immediate hazardous situation, which, if not avoided, may result in death or serious injury.

**CAUTION**

Refers to hazards that could damage the instrument.

**NOTE**

Indicates tips, recommendations and important information. The notes simplify processes and contain additional information on particular operating steps.

**The following symbols may be found on the equipment described in this manual:**



This symbol on the unit indicates that high voltage may be present. Use standard safety precautions to avoid personal contact with this voltage.



This symbol on the unit indicates that the user should refer to the operating instructions located in the manual.



This symbol indicates safety, earth ground.

PCB- PCB工业监测和测量设备 - 中国RoHS 公布表  
PCB Industrial Monitoring and Measuring Equipment - China RoHS Disclosure Table

| 部件名称<br>Part Name                   | 有毒和危险品<br>Toxic and Hazardous Substances or Elements |            |           |                     |                   |                      |                                  |                       |                         |                         |
|-------------------------------------|------------------------------------------------------|------------|-----------|---------------------|-------------------|----------------------|----------------------------------|-----------------------|-------------------------|-------------------------|
| Part                                | 铅<br>(Pb)                                            | 水银<br>(Hg) | 镉<br>(Cd) | 六价<br>铬<br>(Cr(VI)) | 多溴化<br>苯<br>(PBB) | 多溴化二苯<br>醚<br>(PBDE) | 邻苯二甲酸<br>二(2-乙基)<br>己酯<br>(DEHP) | 邻苯二甲丁<br>基苈酯<br>(BBP) | 邻苯二甲酸<br>二酸正丁酯<br>(DBP) | 邻苯二甲酸<br>二异丁酯<br>(DIBP) |
| 电气外壳<br>(Electrical Enclosures)     | X                                                    | O          | O         | O                   | O                 | O                    | O                                | O                     | O                       | O                       |
| 紧固件和弹簧<br>(Fasteners)               | X                                                    | O          | O         | O                   | O                 | O                    | O                                | O                     | O                       | O                       |
| 电缆组件<br>(Cable Assembly)            | X                                                    | O          | O         | O                   | O                 | O                    | O                                | O                     | O                       | O                       |
| 印刷电路板组装<br>(PCBAs)                  | X                                                    | O          | O         | O                   | O                 | O                    | O                                | O                     | O                       | O                       |
| 机械零件(Mechanical<br>Parts)           | O                                                    | O          | O         | O                   | O                 | O                    | O                                | O                     | O                       | O                       |
| 塑料和橡胶零件<br>(Plastic & Rubber Parts) | O                                                    | O          | O         | O                   | O                 | O                    | O                                | O                     | O                       | O                       |
| 金属零件<br>(Metal Parts)               | X                                                    | O          | O         | O                   | O                 | O                    | O                                | O                     | O                       | O                       |

本表格依据 SJ/T 11364 的规定编制

O =表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下 (indicates that the content of the toxic and hazardous substance in all the Homogeneous Materials of the part is below the concentration limit requirement as described in GB/T 26572).

X =表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求 (indicates that the content of the toxic and hazardous substance in at least one Homogeneous Material of the part exceeds the concentration limit requirement as described in GB/T 26572).