

T-Coupler M8 male / 2x M8 female A-cod.

3-pol. / 2x 3-pol.

Art.No.: 7000-88611-0000000

Weight: 0.016 kg

Country of origin: DE

Model designation: MSH02RL0-FR-FR

T-coupler

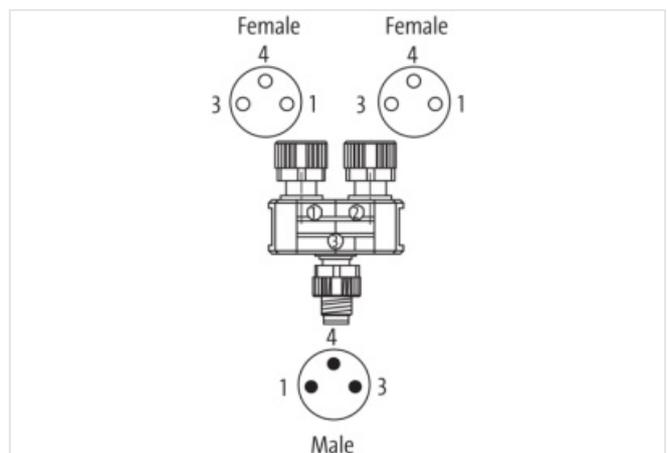
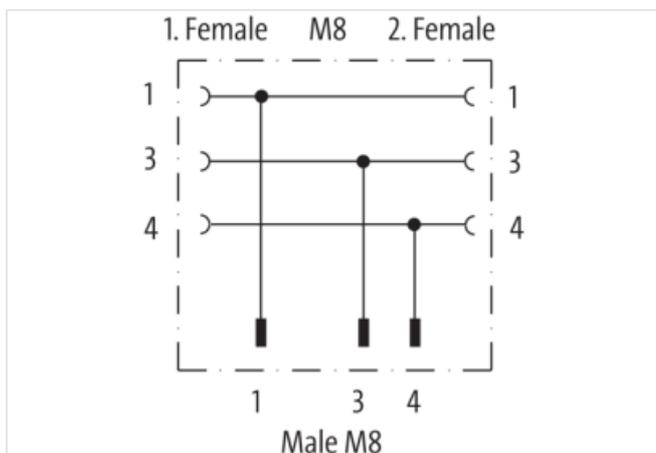
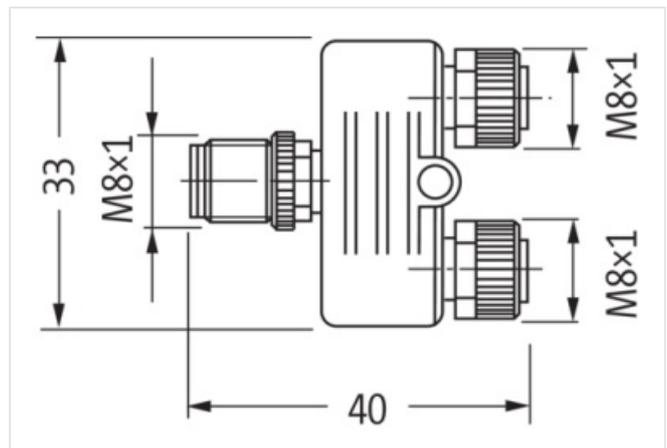
Male straight – females straight

M8 – M8, 3-pole

Parallel circuit

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Header**

Material short text

MSH02RL0-FR-FR

Commercial data

URL Webshop	https://shop.murrelektronik.com/7000-88611-0000000
GTIN	4048879333177
ECLASS-6.0	27143423
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-7.1	27440104
ECLASS-8.0	27440104
ECLASS-8.1	27440104
ECLASS-9.0	27440106
ECLASS-9.1	27440106
ECLASS-10.0.1	27440106
ECLASS-10.1	27440106
ECLASS-11.0	27440106
ECLASS-11.1	27440106
ECLASS-12.0	27440106
ECLASS-13.0	27440106
ECLASS-14.0	27440106
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
customs tariff number	85366990
EAN	4048879333177
Packaging unit	1

Electrical data | Supply

Operating voltage AC max.	50 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Operating voltage AC max. (UL-listed)	30 V
Operating voltage DC max. (UL-listed)	30 V

Installation | Connection

Tightening torque	0,4 Nm
Mounting set	M8 x 1

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	1,5 kV

Mechanical data | Mounting data

Mounting method	inserted, screwed, Shaking protection
-----------------	---------------------------------------

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
Operating temperature max.	85 °C

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.