

Special



Image for illustrative purpose only

Summary

[Request a quote](#)

[M series](#)

[Application leaflet Security Defence](#)

Number of contacts Low Voltage	114
Wire Size/AWG	26 - 22
Gender	Reverse Gender
Plug	Plug - Straight
Locking system	Ratchet
Jacket cable outside diameter [mm]	14.25 - 28.50 mm
Size	5M
Suggested matching part	PMX.5M.114.XLCT PHX.5M.114.XLCT
Series	M - Rugged Ratchet coupling

Technical details

Electrical Configuration

Number of contacts Low Voltage	114
Contact Termination Low voltage	Crimp
Insert configuration value	5M.114 - 114 Low Voltage
Insulator	L: PEEK
Rated current	2 A
Test voltage contact-contact	1.95 kV DC
Test voltage contact-shell	1.9 kV DC
Contact Dia.	0.7
Wire Size/AWG	26 - 22
Gender	Reverse Gender

Form & Material

Shell style / Model id	FM - Straight plug, key (N) or keys (P, R, S, T, U, V, W and X) with knurled grip and mold stop
Plug	Straight
Housing material	Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces bronze/brass
Locking system	Ratchet
Keying	X: 5 keys (alpha=100, beta=125, gamma=40, delta=20, plug: female contacts, receptacle: male contacts)
Colour	Grey
Weight	51.6 g



Environment

Technical domain	Motorsport, Security and Defence, Transportation, Aerospace and UAV
Environmental sealing (IP rating)	IP68
Temperature range	-55°C / +200°C (max. temperature valid for short periods of use.)
EMI Shielding EIA 364-66A	>= 80 dB (1 GHz), >=70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)
Gunfire vibration	25 Hz - 2000 Hz, 3 axis (Apache helicopter)
Humidity (max)	21 days at 95%
Lighting strike EIA 364-76	10K amps - 6 times
Shock Resistance	300 g [3 ms]
Thermal shock	5 cycles: -65°C to +150°C
Vibration-Random	37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]
Vibration-Sine	30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]
Salt Spray Corrosion	max. 48 hr

Cable fixation

Cable termination protection	For overmolding
Fixation type	Mold stop (overmolding)
Jacket cable outside diameter [mm]	14.25 - 28.50 mm

Drawings

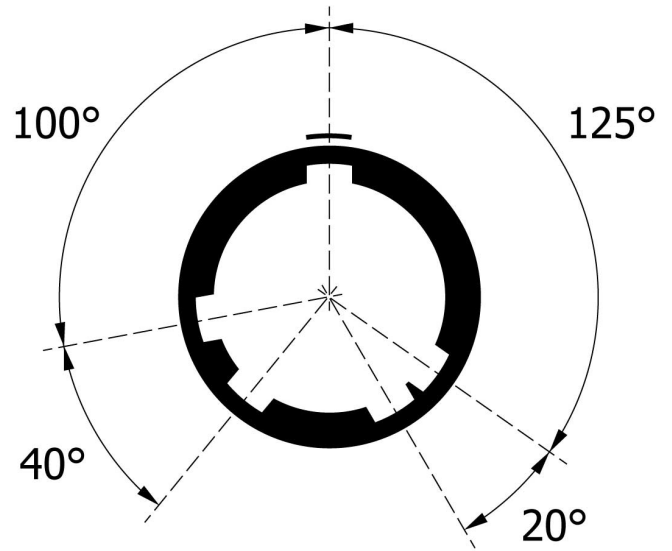

Dimensions

	A	B	C	D	F	Ls	Lr	M	P	X
mm.	34	29.7	33.5	28.5	31.4	31.6	31.6	10.6	3.4	7.6
in.	1.34	1.17	1.32	1.12	1.24	1.24	1.24	0.42	0.13	0.3

Recommended By Lemo

Contacts

Replacement contact [EGW.TM.655.ZZM](#)

Caps

Compatible cap [BMF.5M.100.XAV](#)

Tools

Positionner [DCE.91.07T.5MVM](#)

Extraction tool [DCC.07.04B.LAG](#)

Crimp tool [DPC.91.701.V](#)