

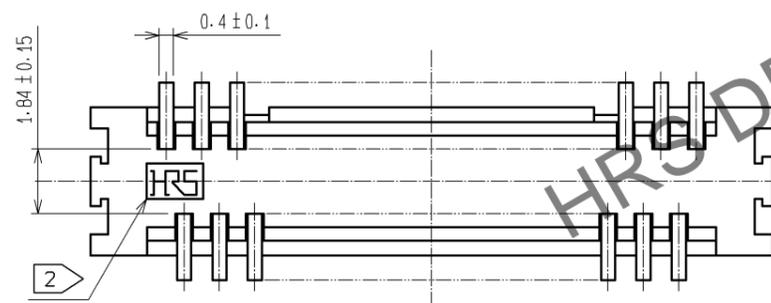
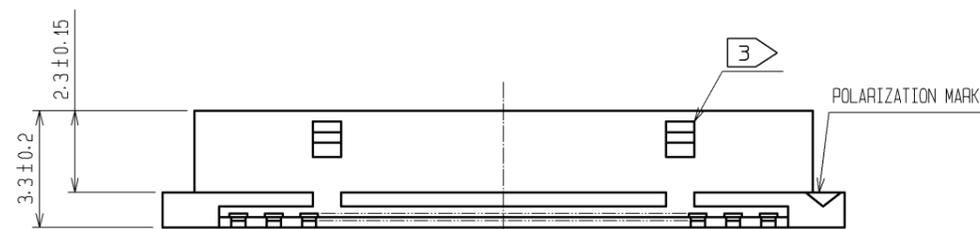


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

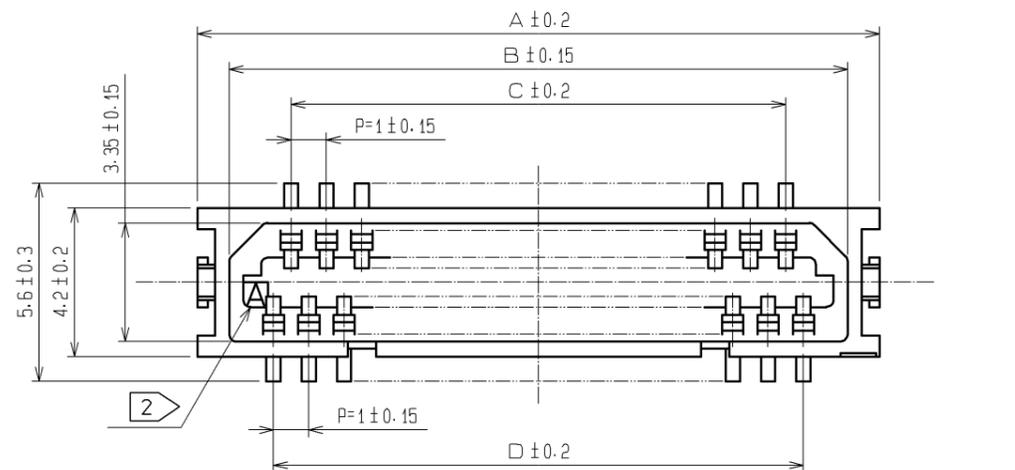

RECOMMENDED PATTERN

9 TO 25 CONTACTS : $1.84^{+0.1}_0$
31 TO 41 CONTACTS : $3^{+0.1}_{-0.1}$

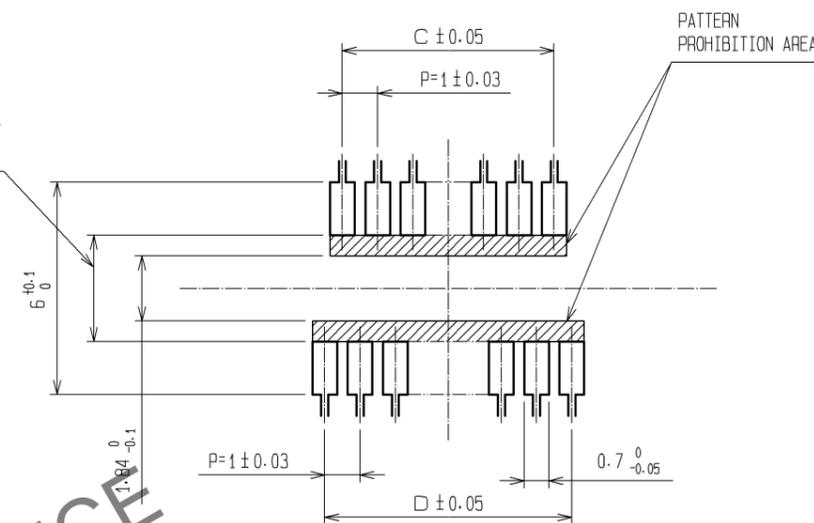


PART No.	CODE No.	NUMBER OF CONTACTS	A	B	C	D
DF9C-9S-1V(22)	-	9	8.3	6.5	3	4
DF9C-11S-1V(22)	-	11	9.3	7.5	4	5
DF9C-13S-1V(22)	-	13	10.3	8.5	5	6
DF9C-15S-1V(22)	-	15	11.3	9.5	6	7
DF9C-17S-1V(22)	-	17	12.3	10.5	7	8
DF9C-19S-1V(22)	-	19	13.3	11.5	8	9
DF9C-21S-1V(22)	-	21	14.3	12.5	9	10
DF9C-23S-1V(22)	-	23	15.3	13.5	10	11
DF9C-25S-1V(22)	-	25	16.3	14.5	11	12
DF9C-31S-1V(22)	CL540-0237-0-22	31	19.3	17.5	14	15
DF9C-41S-1V(22)	CL540-0224-8-22	41	24.3	22.5	19	20

- NOTES 1 : LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.
 ② HRS MARK AND CAV NO. ARE INDICATED IN APPROX POSITION SHOWN.
 ③ 9 TO 25 CONTACT CONNECTORS HAVE ONE LOCK AT CENTER OF HOUSING.
 31 TO 41 CONTACT CONNECTORS HAVE TWO LOCKS AS PER DRAWING.

3	PS	CLEAR(EMBOSSD CARRIER TAPE)	7	PS	REINFORCEMENT COLLAR		
2	PHOSPHOR BRONZE	TIN PLATED(HOT DIP) 1μm min	6	PS	BLACK(PLASTIC REEL)		
1	POLYAMIDE	BEIGE, UL94V-0	5	POLYIMIDE	BROWN(HEAT-RESISTANCE TAPE)		
			4	POLYESTER	CLEAR(COVER TAPE)		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
APPROVED : KH. IKEDA 12.02.21			DRAWING NO. EDC3-310851-02				
CHECKED : AR. TAKAHASHI 12.02.21			PART NO. DF9C- * S - 1V(22)				
DESIGNED : SH. HOSODA 12.02.21			CODE NO. CL540-				
DRAWN : KR. AJITO 12.02.20			1/2				

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

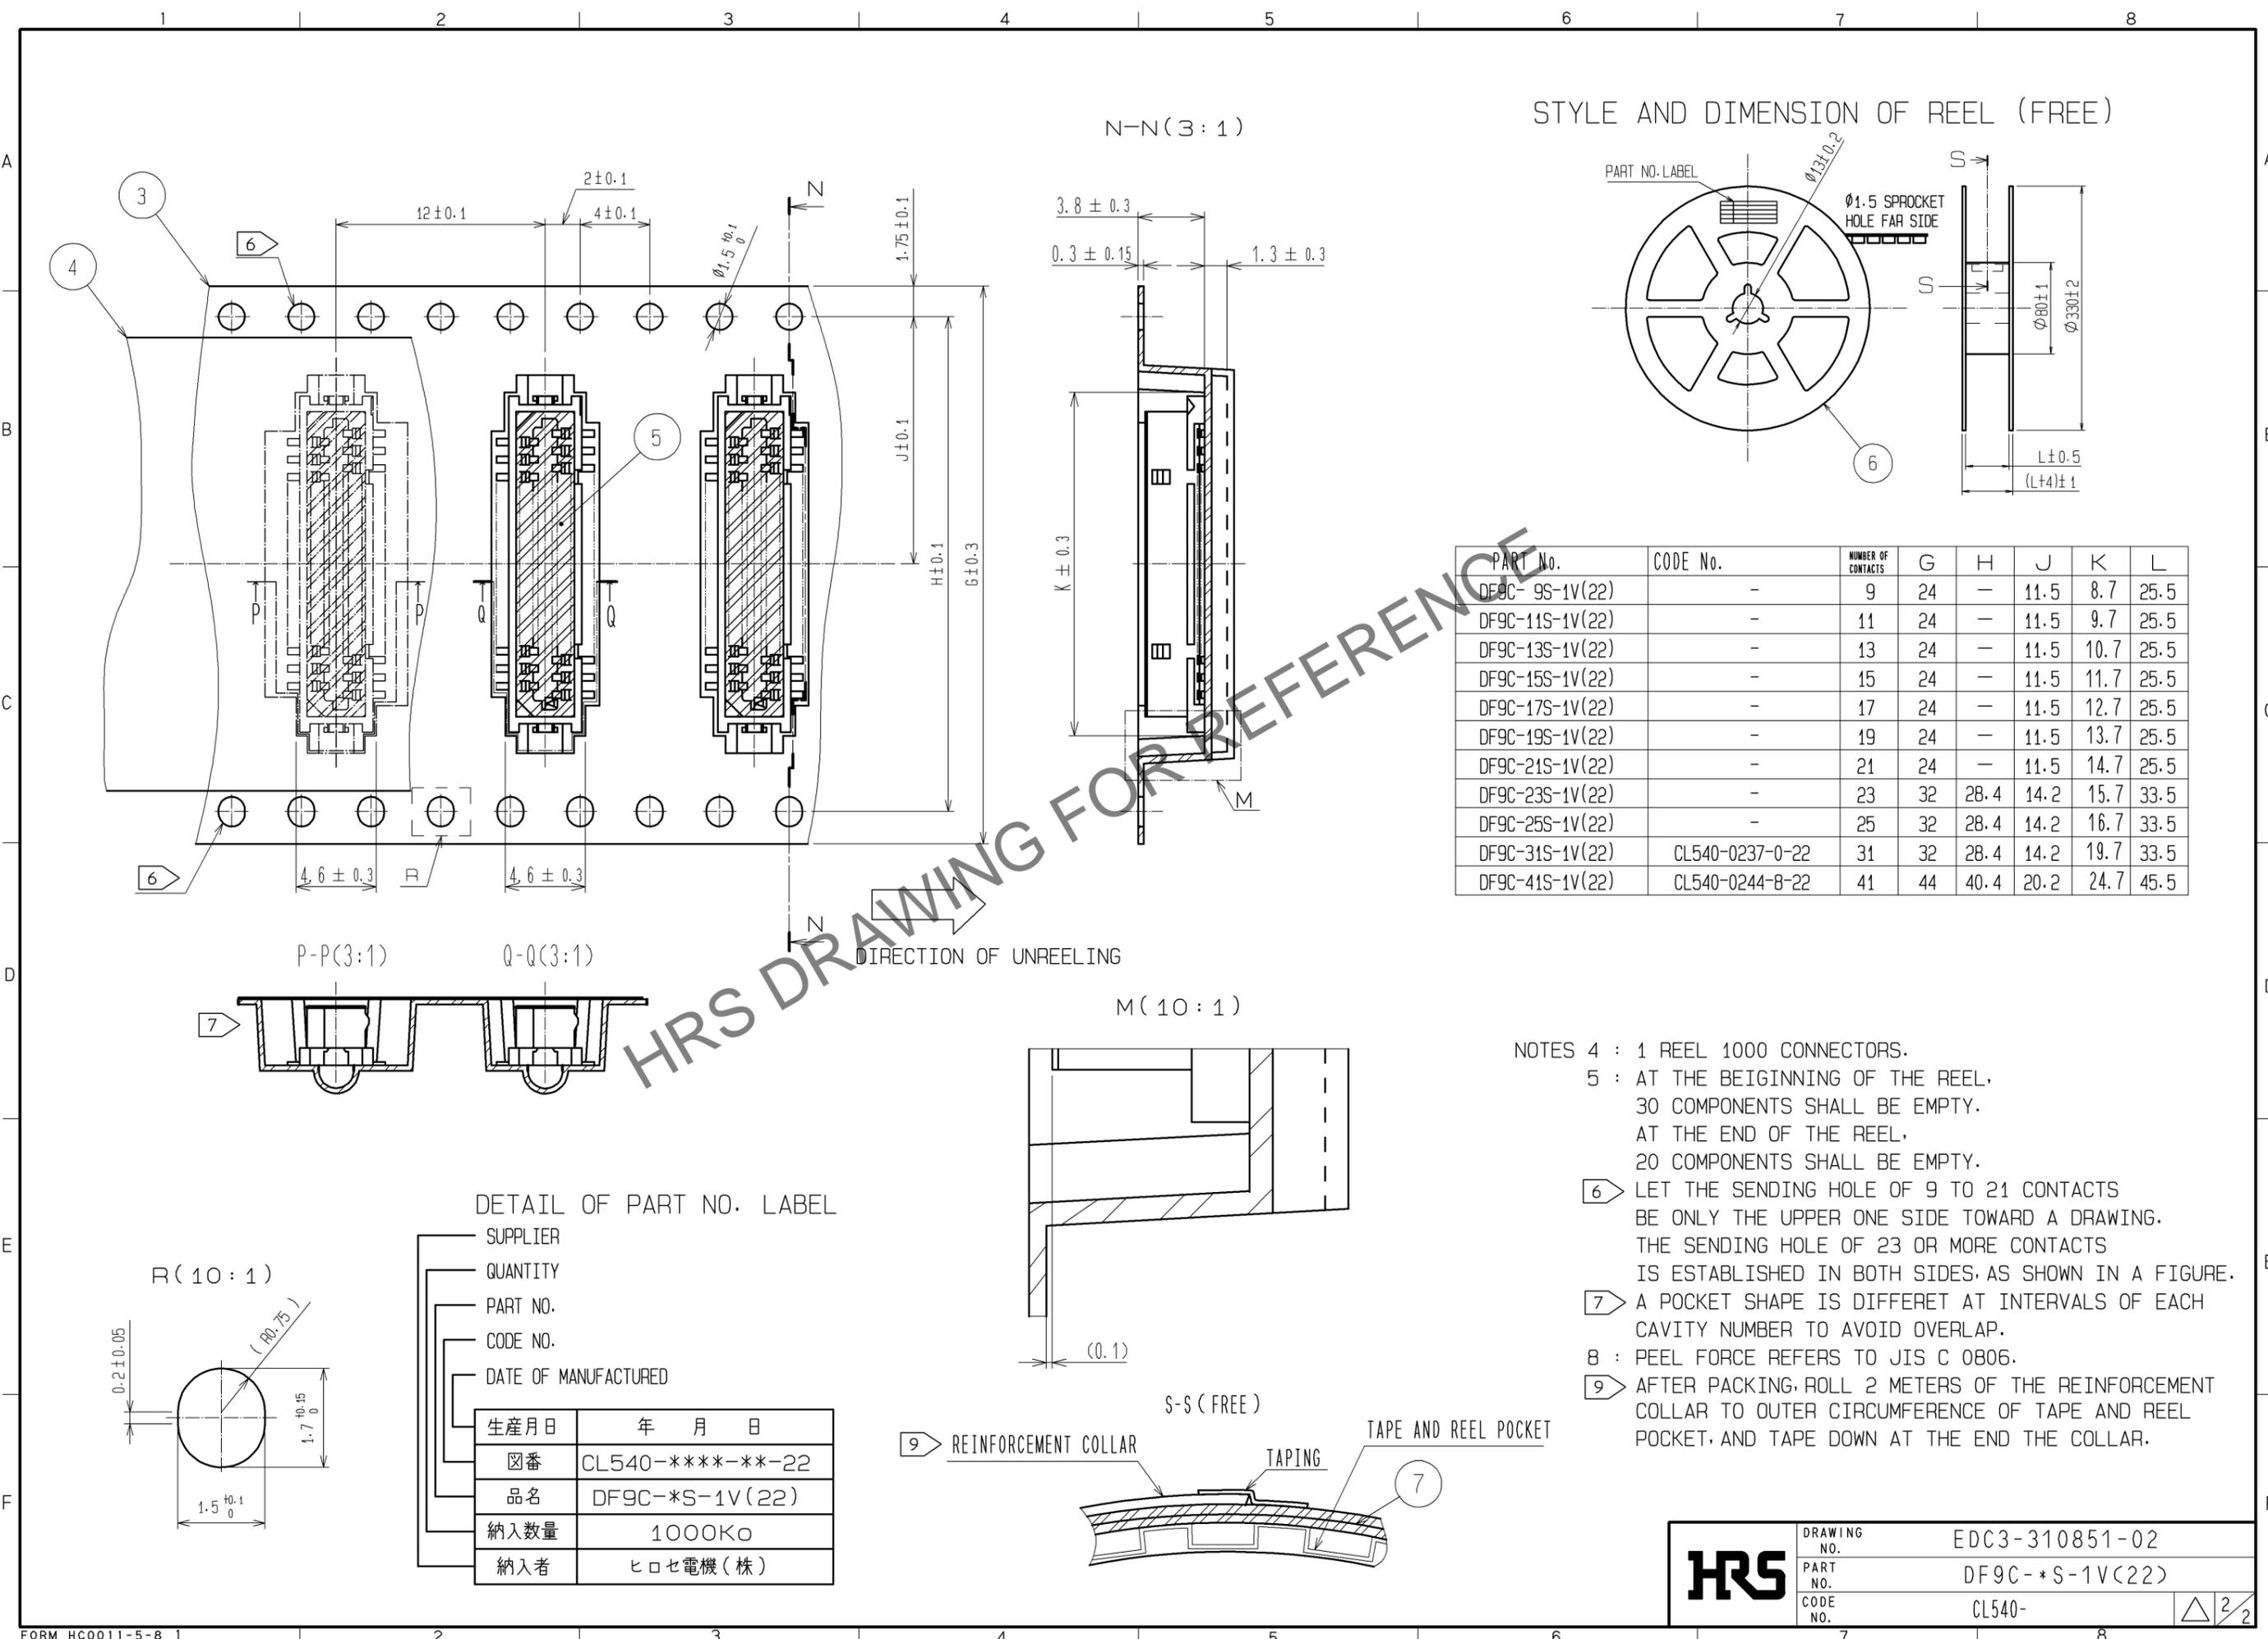

STYLE AND DIMENSION OF REEL (FREE)

PART No.	CODE No.	NUMBER OF CONTACTS	G	H	J	K	L
DF9C-9S-1V(22)	-	9	24	-	11.5	8.7	25.5
DF9C-11S-1V(22)	-	11	24	-	11.5	9.7	25.5
DF9C-13S-1V(22)	-	13	24	-	11.5	10.7	25.5
DF9C-15S-1V(22)	-	15	24	-	11.5	11.7	25.5
DF9C-17S-1V(22)	-	17	24	-	11.5	12.7	25.5
DF9C-19S-1V(22)	-	19	24	-	11.5	13.7	25.5
DF9C-21S-1V(22)	-	21	24	-	11.5	14.7	25.5
DF9C-23S-1V(22)	-	23	32	28.4	14.2	15.7	33.5
DF9C-25S-1V(22)	-	25	32	28.4	14.2	16.7	33.5
DF9C-31S-1V(22)	CL540-0237-0-22	31	32	28.4	14.2	19.7	33.5
DF9C-41S-1V(22)	CL540-0244-8-22	41	44	40.4	20.2	24.7	45.5

HRS DRAWING FOR REFERENCE

- NOTES
- 4 : 1 REEL 1000 CONNECTORS.
 - 5 : AT THE BEGGINING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY. AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
 - 6 : LET THE SENDING HOLE OF 9 TO 21 CONTACTS BE ONLY THE UPPER ONE SIDE TOWARD A DRAWING. THE SENDING HOLE OF 23 OR MORE CONTACTS IS ESTABLISHED IN BOTH SIDES, AS SHOWN IN A FIGURE.
 - 7 : A POCKET SHAPE IS DIFFERET AT INTERVALS OF EACH CAVITY NUMBER TO AVOID OVERLAP.
 - 8 : PEEL FORCE REFERS TO JIS C 0806.
 - 9 : AFTER PACKING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

DETAIL OF PART NO. LABEL

SUPPLIER	
QUANTITY	
PART NO.	
CODE NO.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL540-****-**-22
品名	DF9C-*S-1V(22)
納入数量	1000K0
納入者	ヒロセ電機(株)

HRS	DRAWING NO.	EDC3-310851-02
	PART NO.	DF9C-*S-1V(22)
	CODE NO.	CL540-
		△ 2/2