



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					

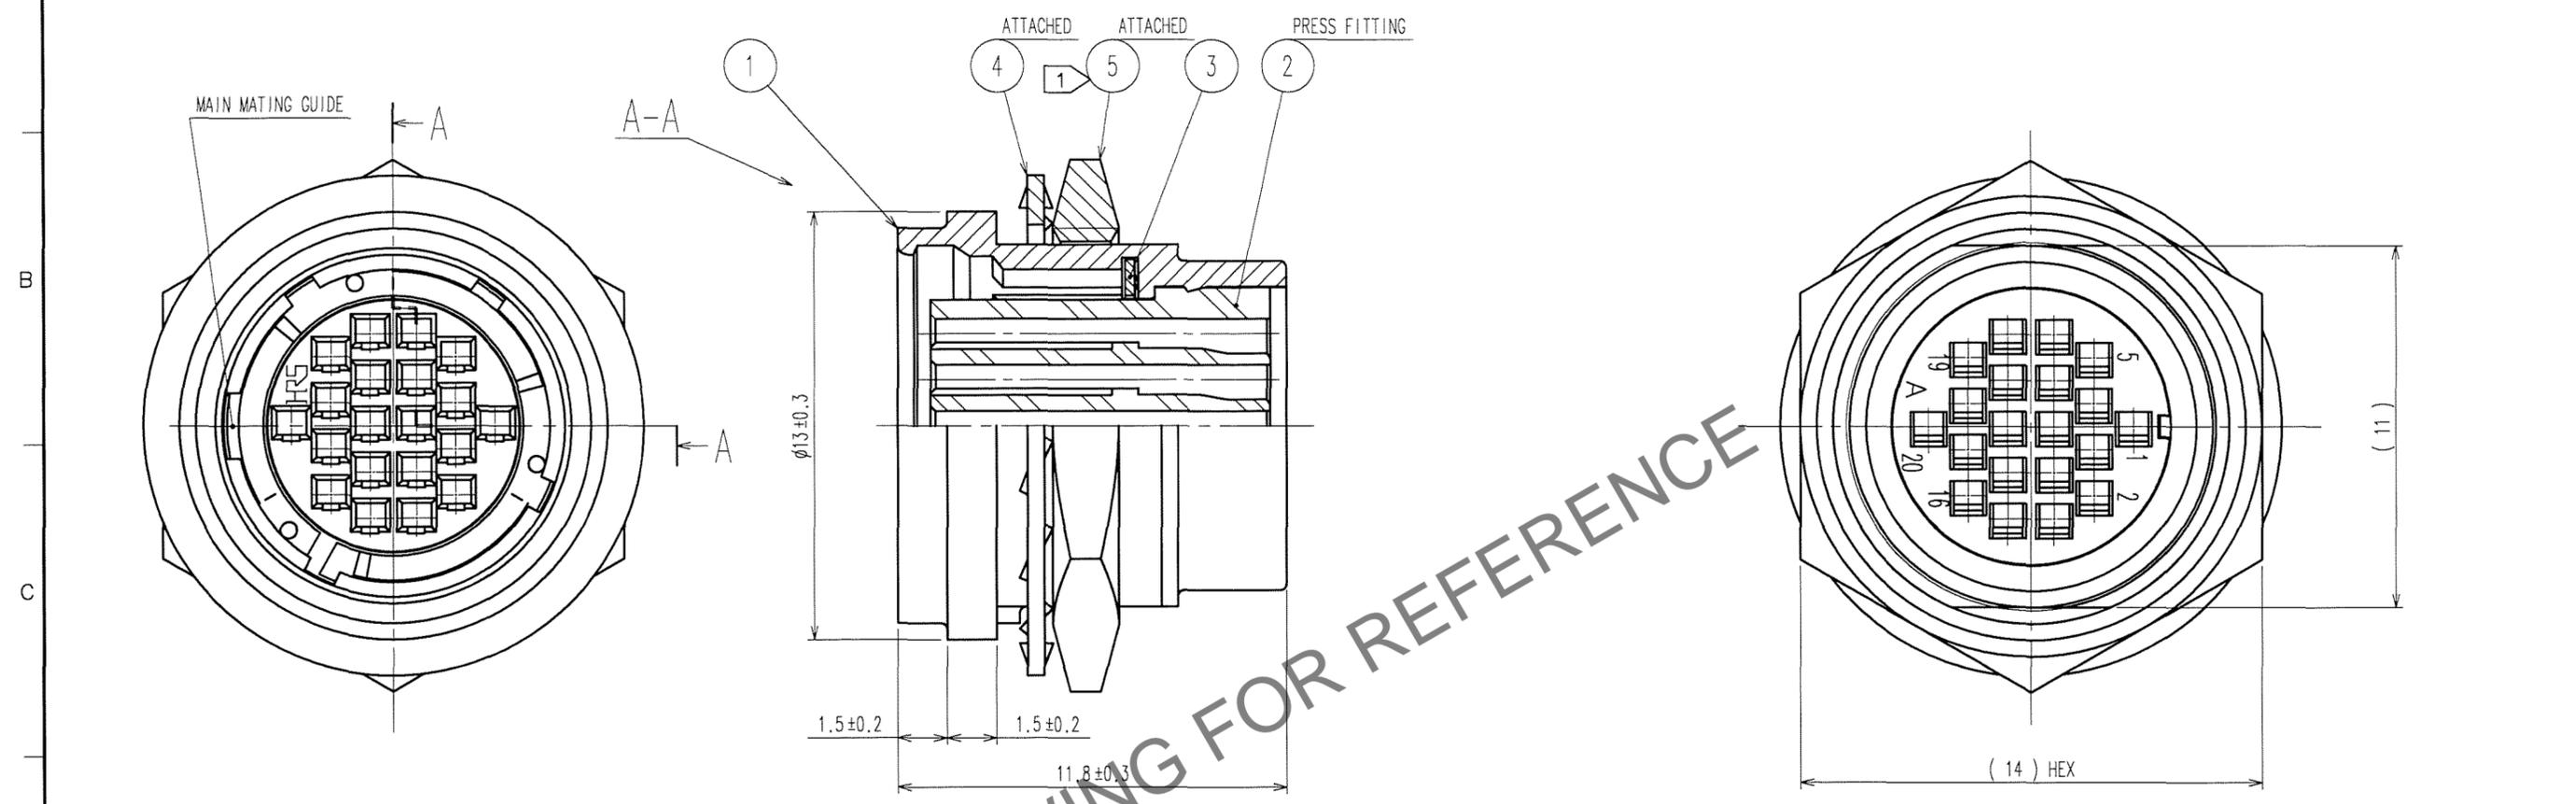

PANEL CUTOUT  
PANEL THICKNESS : 0.7 TO 2

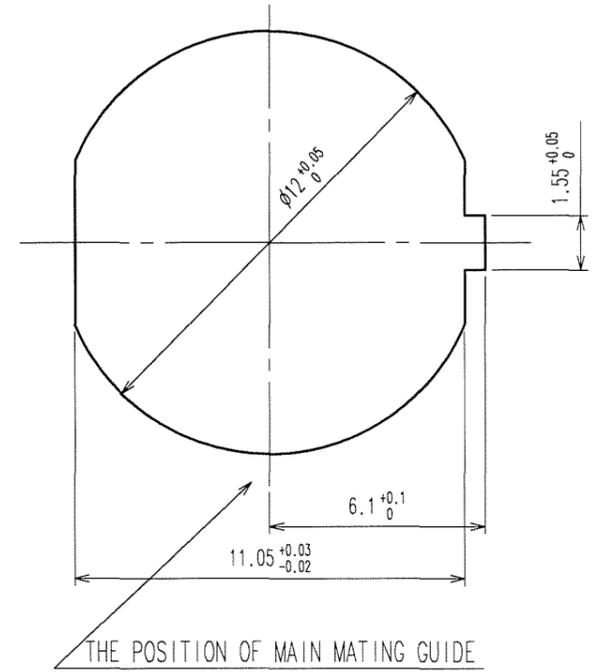

HRS DRAWING FOR REFERENCE

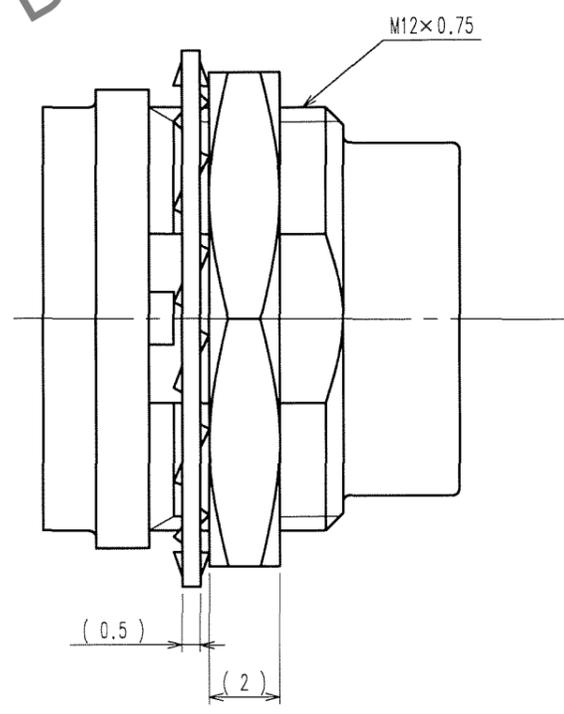

- NOTES
- 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑤ TO BE 1.5 N · m. COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.
  - 2 APPLICABLE CRIMP CONTACT: HR25-SC-111 (CL125-0421-3) (AWG#30, JACKET OUTSIDE DIA: 0.71 MAX.)
  - 3 APPLICABLE CRIMP CONTACT EXTRACTION TOOL: HR25-TP (CL125-0091-0)

3	BERYLLIUM COPPER	NICKEL PLATING	5	BRASS	NICKEL PLATING
2	POLYPHENYLENE SULFIDE	(BLACK) 94V-0	4	STEEL	ZINC CHROMATIZED (TRIVALENT CHROMIUM)
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN M. SATO '06 09 26	DESIGNED Y. YAMADA '06 09 27	CHECKED .	APPROVED M. SATO '06 09 27	RELEASED .
----------------------	-------------------------------	------------------------------------	--------------	----------------------------------	---------------

SCALE 5 : 1	DRAWING NO. EDC3-115097	PART NO. HR25A-9R-20SC
UNITS mm	<b>HRS</b> HIROSE ELECTRIC CO., LTD	CODE NO. CL125-0655-4-00

TO
R