


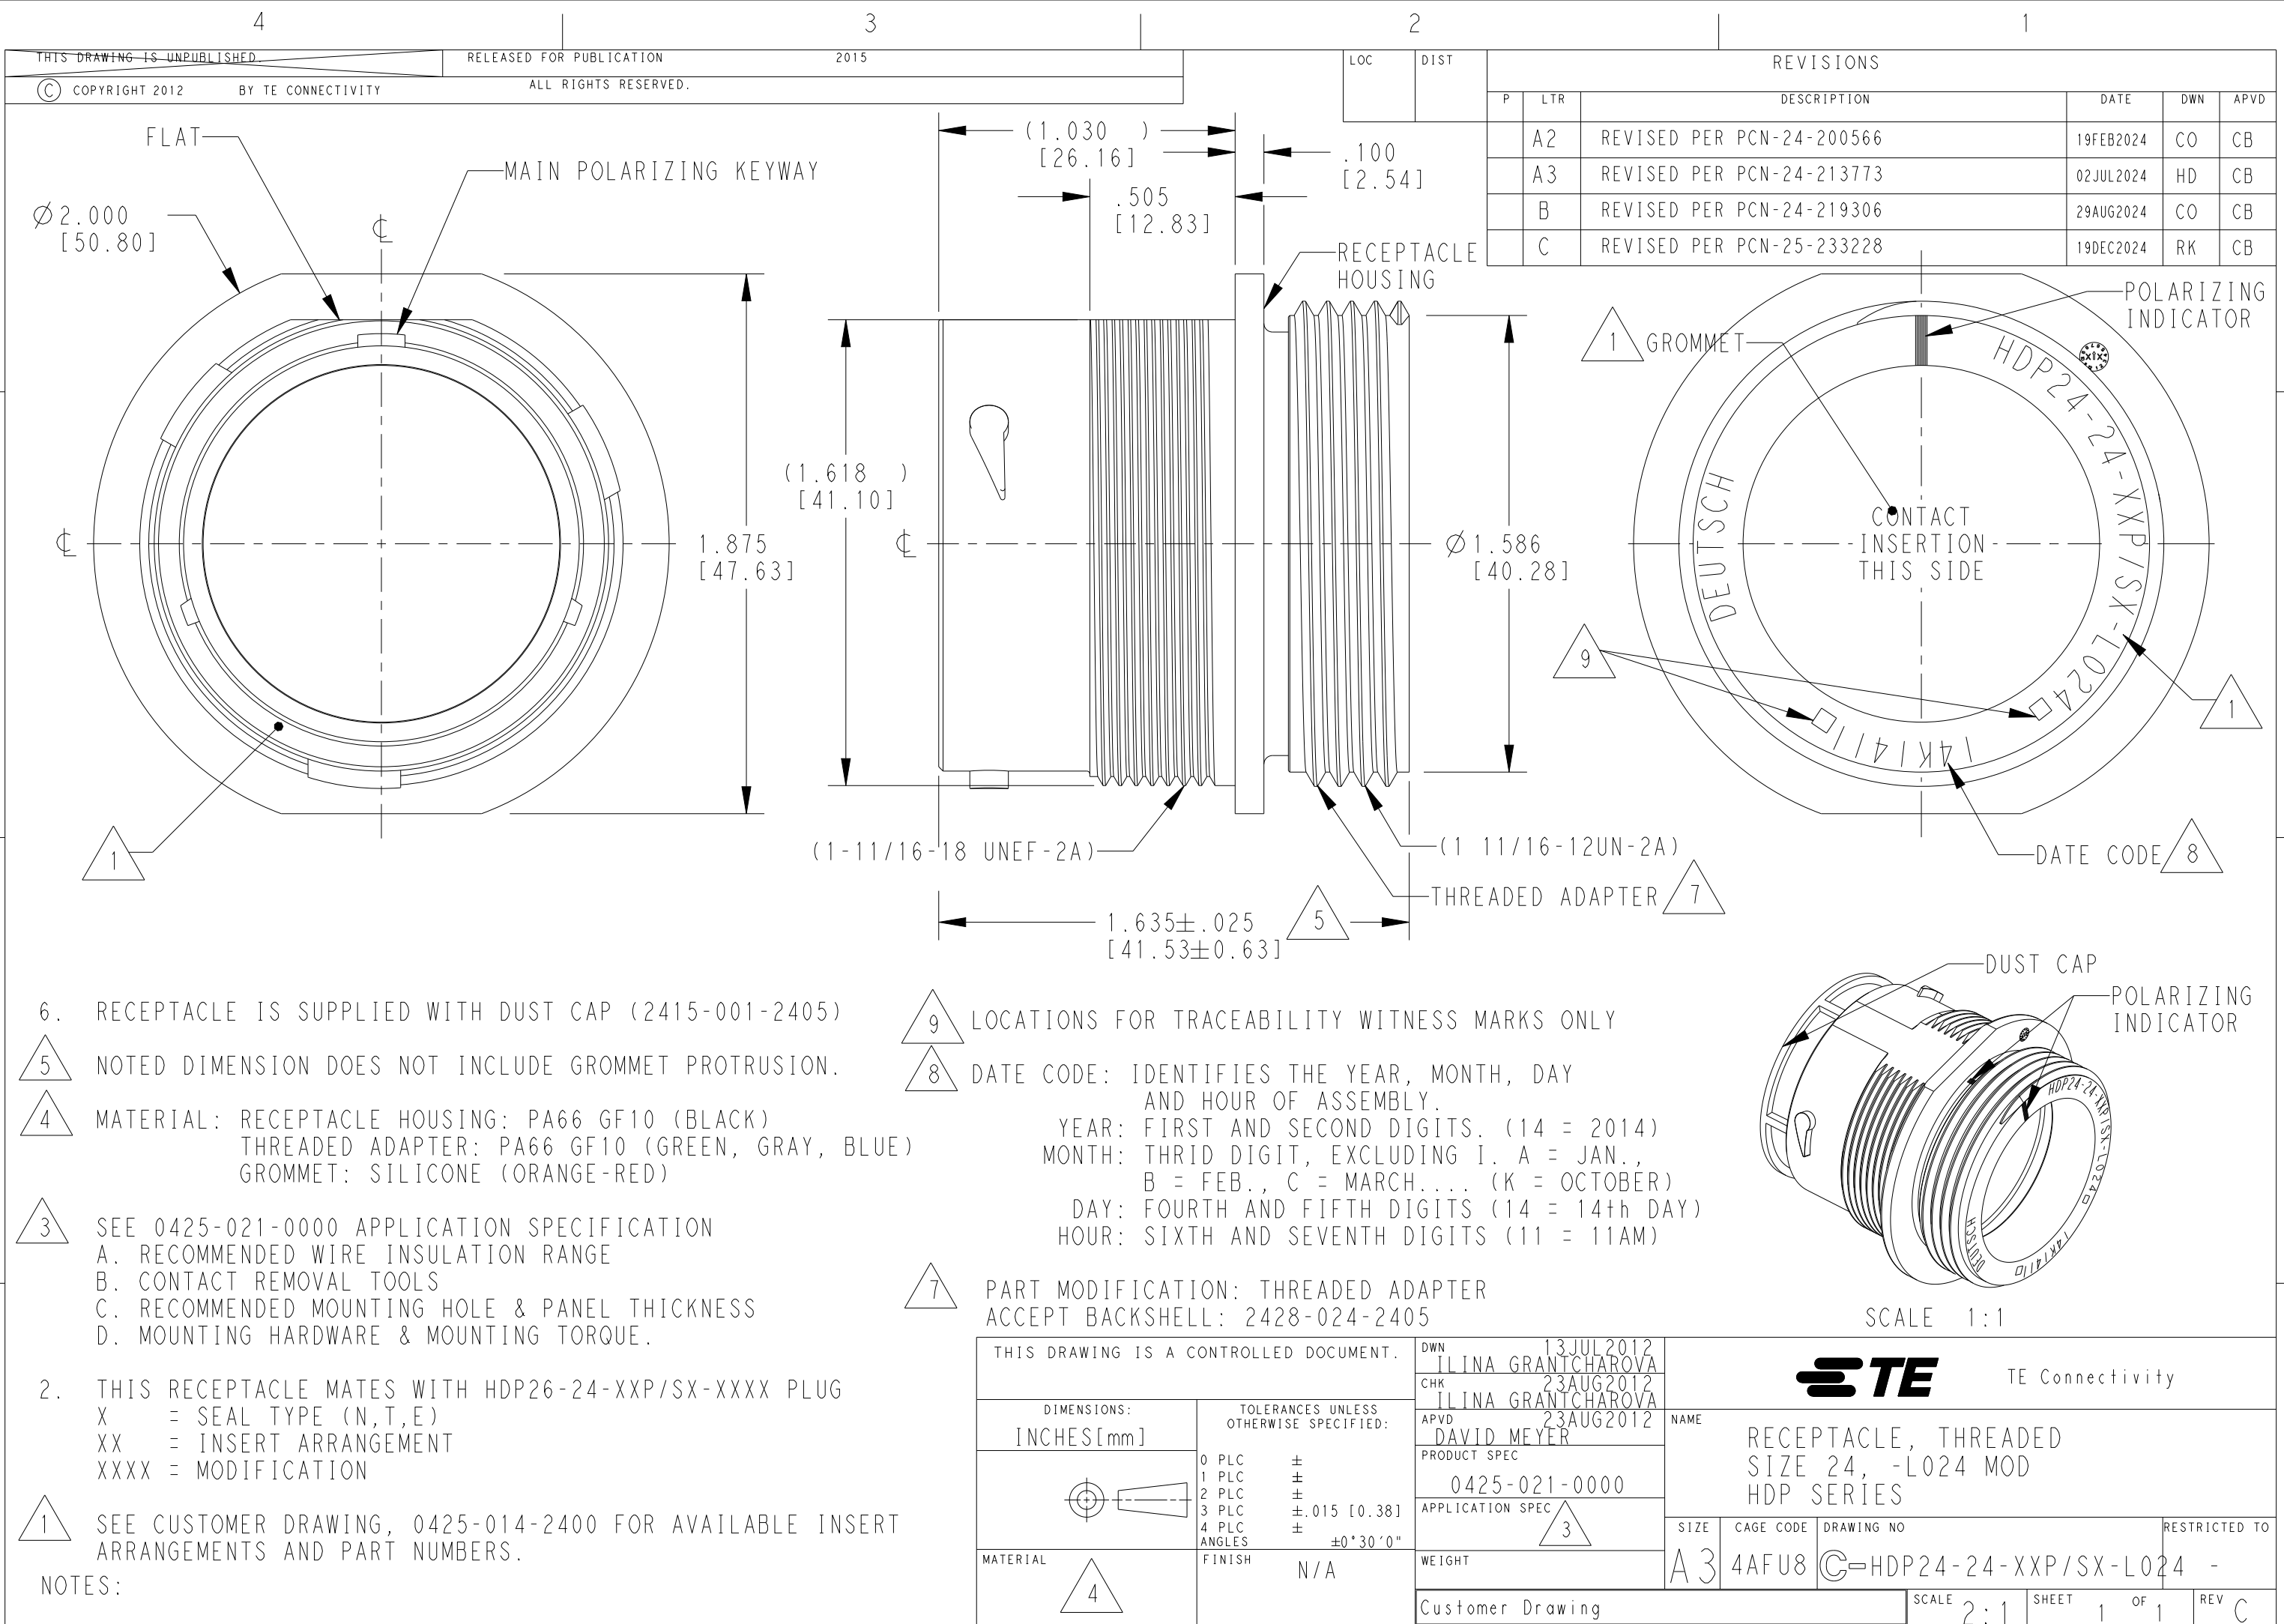

6. RECEPTACLE IS SUPPLIED WITH DUST CAP (2415-001-2405)

5. NOTED DIMENSION DOES NOT INCLUDE GROMMET PROTRUSION.

4. MATERIAL: RECEPTACLE HOUSING: PA66 GF10 (BLACK)
THREADED ADAPTER: PA66 GF10 (GREEN, GRAY, BLUE)
GROMMET: SILICONE (ORANGE-RED)

3. SEE 0425-021-0000 APPLICATION SPECIFICATION
A. RECOMMENDED WIRE INSULATION RANGE
B. CONTACT REMOVAL TOOLS
C. RECOMMENDED MOUNTING HOLE & PANEL THICKNESS
D. MOUNTING HARDWARE & MOUNTING TORQUE.

2. THIS RECEPTACLE MATES WITH HDP26-24-XXP/SX-XXXX PLUG
X = SEAL TYPE (N,T,E)
XX = INSERT ARRANGEMENT
XXXX = MODIFICATION


1. SEE CUSTOMER DRAWING, 0425-014-2400 FOR AVAILABLE INSERT ARRANGEMENTS AND PART NUMBERS.

NOTES:

9. LOCATIONS FOR TRACEABILITY WITNESS MARKS ONLY

8. DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGITS. (14 = 2014)
MONTH: THRID DIGIT, EXCLUDING I. A = JAN., B = FEB., C = MARCH.... (K = OCTOBER)
DAY: FOURTH AND FIFTH DIGITS (14 = 14th DAY)
HOUR: SIXTH AND SEVENTH DIGITS (11 = 11AM)

7. PART MODIFICATION: THREADED ADAPTER
ACCEPT BACKSHELL: 2428-024-2405

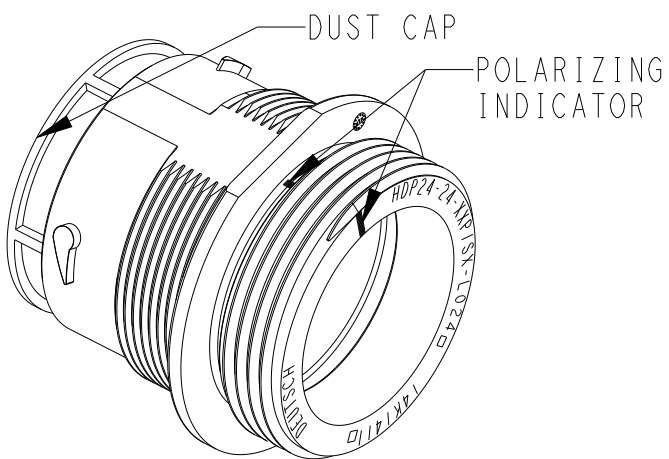

SCALE 1:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	13JUL2012	TE Connectivity		
		CHK	23AUG2012			
		APVD	23AUG2012	NAME		
		PRODUCT SPEC	DAVID MEYER			
		APPLICATION SPEC	0425-021-0000	RECEPTACLE, THREADED SIZE 24, -L024 MOD HDP SERIES		
			3			
		WEIGHT		SIZE	CAGE CODE	DRAWING NO
				A3	4AFU8	C-HDP24-24-XXP/SX-L024
		Customer Drawing		SCALE	SHEET	OF
				2:1	1	1
					REV	C