

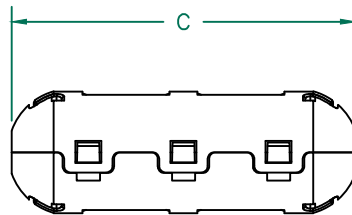


CORE DIMENSIONS

A	15.00 [.591]	+	0.50 [.020]
B	6.55 [.258]	+	0.30 [.012]
C	39.78 [1.566]	+	0.60 [.024]
D	7.16 [.282]	+	0.35 [.014]

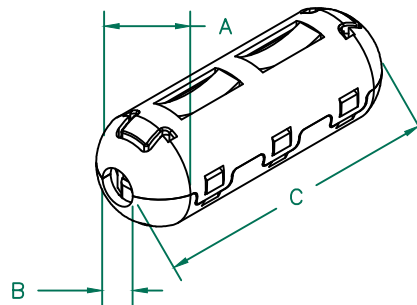


CASE DIMENSIONS:

A	18.75 [.738]	+	REF.
B	6.75 [.266]	+	REF.
C	52.91 [2.083]	+	REF.
D	18.75 [.738]	+	REF.
E	3.24 [.128]	+	REF.

IMPEDANCE (Z)

Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	186 Ω	407 Ω	575 Ω
Minimum	- Ω	305 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

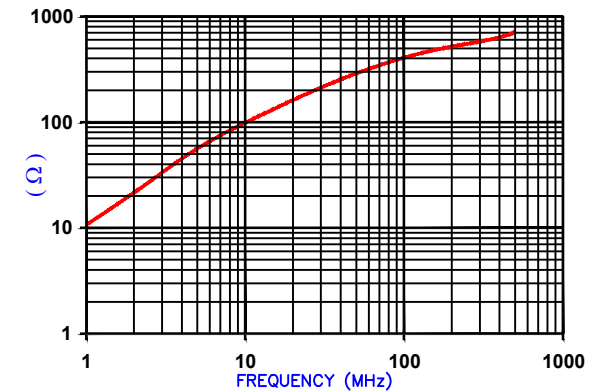

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture. TEST REF. 4095

NOTES:

1. ASSEMBLED PART #: 28A0593-0A2
2. CASE COLOR: BLACK-0A2.
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon
5. COSMETIC SPECIFICATION REFER TO WI-QA-038.

DIMENSIONS ARE IN mm [INCHES].

L	ADD NOTE 5	11/22/18	XIAN
K	UPDATED CORE TOL	12/23/15	Jcai
J	UPDATED Z SPEC	11/24/14	Jcai
H	UPDATED NOTE 3	09/15/10	JUN
G	ADD NOTES 3 AND 4	01/27/09	JRK
F	ADD MISSING DIM CALLOUTS "D & E" TO CASE UPDATE COMPANY LOGO	05/07/08	TMB
E	UPDATE 100MHz MINIMUM VALUE UPDATE COMPANY LOGO TOLERANCES TO REF VIEWS UPDATE NOTES	06/26/07	TMB
D	REV CASE DIM C TO MATCH CASE PRINT	01/11/07	TMB
REV	DESCRIPTION	DATE	INT

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.

PROJECT/PART NUMBER:

28A0593-0A2

DATE: 11/22/18

CAD # 28A0593-0A2-L

Laird

REV L

PART TYPE:
FERRITE
SNAP-ON

DRAWN BY:
XIAN

SCALE: N.T.S.

TOOL # -

MATERIAL:
Ferrite