

# Panasonic

# 2015

CATALOG

Fixed Resistors



## Fixed Resistors CONTENTS

Classification	Product Item	Part No.	Page		
Safety Precautions (Common precautions for Fixed Resistors)			2		
Surface Mount Resistors	Chip Resistors	Thick Film Chip Resistors	ERJ XG, 1G, 2G, 3G, 6G, 8G, 14, 12, 12Z, 1T	3	
		Precision Thick Film Chip Resistors	ERJ XG, 1G, 1R, 2R, 3R, 6R, 3E, 6E, 8E, 14, 12, 1T	5	
	High Precision	Metal Film (Thin Film) Chip Resistors, High Reliability Type	ERA 1A, 2A, 3A, 6A, 8A	8	
		Thick Film Chip Resistors / Low Resistance Type	ERJ 2LW, 3LW, 2B, 3B, 6B, 8B, 14B, 8C, 3R, 6R, 8R, 14R, 12R ERJ 12Z, 1TR, L03, L06, L08, L14, L12, L1D, L1W	10	
	Current Sensing	Current Sensing Resistors, Metal Plate Type	ERJ MS4S, MS4H, MS6S	14	
		Current Sensing Resistors, Metal Plate Type	ERJ M1WS, M1WT	18	
		High Power Chip Resistors / Wide Terminal Type	ERJ A1, B1, B2, B3	20	
		Small&High Power	Anti-Surge Thick Film Chip Resistors	ERJ P03, PA3, P06, P08, P14	23
	Anti-Pulse Thick Film Chip Resistors		ERJ T06, T08, T14	25	
	Anti-Sulfurated	Anti-Sulfurated Thick Film Chip Resistors	ERJ S02, S03, S06, S08, S14, S12, S1D, S1T ERJ U01, U02, U03, U06, U08, U14, U12, U1D, U1T ERJ U6S, U6Q	27	
		Anti-Sulfurated High Power Chip Resistors / Wide Terminal Type	ERJ C1	30	
		Resistor Network/Array	Chip Resistor Array	EXB 14V, 18V, 24V, 28V, N8V, 2HV, 34V, V4V, 38V, V8V, S8V	32
			Metal Film Chip Resistor Array	ERA38V	35
	Anti-Sulfurated Chip Resistor Array		EXB U2, U3	37	
	Chip Resistor Networks		EXB D, E, A, Q	39	
	Chip Attenuator		EXB 14AT, 24AT	41	
	Common specifications	Packaging Methods (Taping)		43	
		Recommended Land Pattern		47	
		Recommended Soldering Conditions		49	
		Safety Precautions (Common precautions for Surface Mount Resistors)		50	
Power Type Resistors (Leaded)	Metal (Oxide) Film Resistors, Flame-Retardant	ERG 12S, 1S, 1F, 2S, 2F, 3S, 3F, 5S, 5F ERX 12S, 1S, 1F, 2S, 2F, 3S, 3F, 5S, 5F	51		
	Anti-Pulse Power Resistors	ERG 12D, 1D, 2D, 3D	58		
	Metal Film Resistors / Low Resistance Value	ERX 12L, 1L, 2L	60		
Fusing Resistors	Metal Film Fusing Resistors	ERQ 1Z, 2Z, 12Z, 14Z ERQ 1AB, 2AB, 12A, 14A	62		
Fixed Resistors Appendix			68		

All products in this catalog comply with the RoHS Directive.

The RoHS Directive is “the Directive (2011/65/EU) on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment “ and its revisions.

## △Safety Precautions (Common precautions for Fixed Resistors)

- When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance. The design and specifications in this catalog are subject to change without prior notice.
- Do not use the products beyond the specifications described in this catalog.
- This catalog explains the quality and performance of the products as individual components. Before use, check and evaluate their operations when installed in your products.
- Install the following systems for a failsafe design to ensure safety if these products are to be used in equipment where a defect in these products may cause the loss of human life or other significant damage, such as damage to vehicles (automobile, train, vessel), traffic lights, medical equipment, aerospace equipment, electric heating appliances, combustion/gas equipment, rotating equipment, and disaster/crime prevention equipment.

\* Systems equipped with a protection circuit and a protection device  
\* Systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault

### (1) Precautions for use

- These products are designed and manufactured for general and standard use in general electronic equipment (e.g. AV equipment, home electric appliances, office equipment, information and communication equipment)
- These products are not intended for use in the following special conditions. Before using the products, carefully check the effects on their quality and performance, and determine whether or not they can be used.
  1. In liquid, such as water, oil, chemicals, or organic solvent
  2. In direct sunlight, outdoors, or in dust
  3. In salty air or air with a high concentration of corrosive gas, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, or NO<sub>2</sub>
  4. Electric Static Discharge (ESD) Environment  
These components are sensitive to static electricity and can be damaged under static shock (ESD).  
Please take measures to avoid any of these environments.  
Smaller components are more sensitive to ESD environment.
- 5. Electromagnetic Environment  
Avoid any environment where strong electromagnetic waves exist.
- 6. In an environment where these products cause dew condensation
- 7. Sealing or coating of these products or a printed circuit board on which these products are mounted, with resin or other materials

• These products generate Joule heat when energized. Carefully position these products so that their heat will not affect the other components.

• Carefully position these products so that their temperatures will not exceed the category temperature range due to the effects of neighboring heat-generating components. Do not mount or place heat-generating components or inflammables, such as vinyl-coated wires, near these products.

• Note that non-cleaning solder, halogen-based highly active flux, or water-soluble flux may deteriorate the performance or reliability of the products.

• Carefully select a flux cleaning agent for use after soldering. An unsuitable agent may deteriorate the performance or reliability. In particular, when using water or a water-soluble cleaning agent, be careful not to leave water residues. Otherwise, the insulation performance may be deteriorated.

### (2) Precautions for storage

The performance of these products, including the solderability, is guaranteed for a year from the date of arrival at your company, provided that they remain packed as they were when delivered and stored at a temperature of 5 °C to 35 °C and a relative humidity of 45 % to 85 %.

Even within the above guarantee periods, do not store these products in the following conditions. Otherwise, their electrical performance and/or solderability may be deteriorated, and the packaging materials (e.g. taping materials) may be deformed or deteriorated, resulting in mounting failures.

1. In salty air or in air with a high concentration of corrosive gas, such as Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, or NO<sub>2</sub>
2. In direct sunlight

This is all for the common precautions. Also refer to the "CAUTION AND WARNING" section located on the back of the front cover of this catalog and precautions for individual products shown in the subsequent pages.

#### <Package markings>

Package markings include the product number, quantity, and country of origin.  
In principle, the country of origin should be indicated in English.

## Thick Film Chip Resistors

Type: **ERJ XG, 1G, 2G, 3G, 6G, 8G, 14, 12, 12Z, 1T**

102

102

102

102

### Features

- Small size and lightweight
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Compatible with placement machines  
Taping packaging available
- Suitable for both reflow and flow soldering
- Reference Standards  
IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified (Exemption ERJXG)
- RoHS compliant

### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files


### Explanation of Part Numbers

- ERJXGN, 1GN, 2GE, 3GE, 6GE, 8GE, 14, 12, 12Z, 1T Type,  $\pm 5\%$


1	2	3	4	5	6	7	8	9	10	11	12
E	R	J	3	G	E	Y	J	1	0	2	V
Product Code											
Thick Film Chip Resistors											
Size, Power Rating											
Code Inch Power R.											
XGN 01005 0.031 W											
1GN 0201 0.05 W											
2GE 0402 0.1 W											
3GE 0603 0.1 W											
6GE 0805 0.125 W											
8GE 1206 0.25 W											
14 1210 0.5 W											
12 1812 0.75 W											
12Z 2010 0.75 W											
1T 2512 1 W											
Marking											
Code Marking											
Y Value Marking on black side											
*Nil No marking											
Resistance Tolerance											
Code Tolerance											
J $\pm 5\%$											
0 Jumper											
Resistance Value											
The first two digits are significant figures of resistance and the third one denotes number of zeros following. Decimal Point is expressed by R as 4.7 = 4R7. Jumper is expressed by R00.											
Packaging Methods											
Code Packaging Part No.											
Y Pressed Carrier Taping W8P2, 20,000 pcs.											
U Embossed Carrier Taping W4P1, 40,000 pcs.											
C Pressed Carrier Taping 2 mm pitch, 15,000 pcs.											
X Punched Carrier Taping 2 mm pitch, 10,000 pcs.											
Y Punched Carrier Taping 2 mm pitch, 20,000 pcs.											
V Punched Carrier Taping 4 mm pitch, 5,000 pcs.											
U Embossed Carrier Taping 4 mm pitch, 5,000 pcs.											
U Embossed Carrier Taping 4 mm pitch, 4,000 pcs.											

\* When omitted, the rest of the P/N factors shall be moved up respectively.  
(Only XGN, 1GN, 2GE type)

## Construction

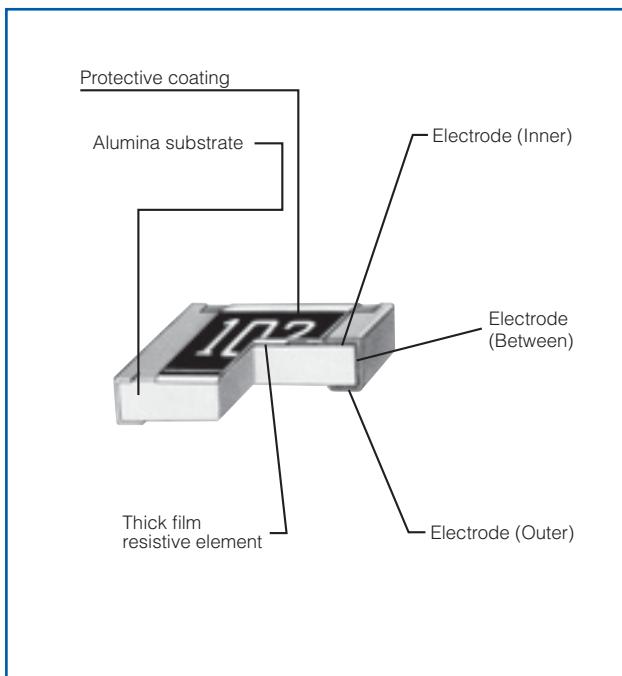

## Dimensions in mm (not to scale)

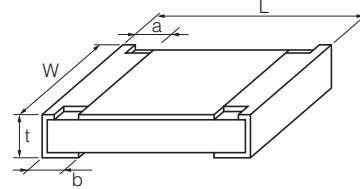

Part No. (inch size)	Dimensions (mm)					Mass (Weight) (g/1000 pcs.)
	L	W	a	b	t	
ERJXG (01005)	0.40 <sup>±0.02</sup>	0.20 <sup>±0.02</sup>	0.10 <sup>±0.03</sup>	0.10 <sup>±0.03</sup>	0.13 <sup>±0.02</sup>	0.04
ERJ1G (0201)	0.60 <sup>±0.03</sup>	0.30 <sup>±0.03</sup>	0.10 <sup>±0.05</sup>	0.15 <sup>±0.05</sup>	0.23 <sup>±0.03</sup>	0.15
ERJ2G (0402)	1.00 <sup>±0.05</sup>	0.50 <sup>±0.05</sup>	0.20 <sup>±0.10</sup>	0.25 <sup>±0.05</sup>	0.35 <sup>±0.05</sup>	0.8
ERJ3G (0603)	1.60 <sup>±0.15</sup>	0.80 <sup>±0.15</sup>	0.30 <sup>±0.20</sup>	0.30 <sup>±0.15</sup>	0.45 <sup>±0.10</sup>	2
ERJ6G (0805)	2.00 <sup>±0.20</sup>	1.25 <sup>±0.10</sup>	0.40 <sup>±0.20</sup>	0.40 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	4
ERJ8G (1206)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.15</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	10
ERJ14 (1210)	3.20 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	16
ERJ12 (1812)	4.50 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	27
ERJ12Z (2010)	5.00 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	27
ERJ1T (2512)	6.40 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.65 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	45

## Ratings

### [For Resistor]

Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJXG (01005)	0.031	15	30	±5	4.7 to 1 M (E24)	<10 Ω: -100 to +600 10 Ω to 100 Ω: ±300 100 Ω <: ±200	-55 to +125
ERJ1G (0201)	0.05	25	50	±5	1 to 10 M (E24)	<10 Ω: -100 to +600	-55 to +125
ERJ2G (0402)	0.1	50	100	±5	1 to 10 M (E24)		-55 to +155
ERJ3G (0603)	0.1	75	150	±5	1 to 10 M (E24)		-55 to +155
ERJ6G (0805)	0.125	150	200	±5	1 to 10 M (E24)		-55 to +155
ERJ8G (1206)	0.25	200	400	±5	1 to 10 M (E24)	10 Ω to 1 MΩ: ±200	-55 to +155
ERJ14 (1210)	0.5	200	400	±5	1 to 10 M (E24)		-55 to +155
ERJ12 (1812)	0.75	200	500	±5	1 to 10 M (E24)		-55 to +155
ERJ12Z (2010)	0.75	200	500	±5	1 to 10 M (E24)		-55 to +155
ERJ1T (2512)	1	200	500	±5	1 to 1 M (E24)	1 MΩ <: -400 to +150	-55 to +155
							-55 to +155

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $\text{RCWV} = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.


(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $\text{SOTV} = 2.5$  (Only ERJ2G=2.0)  $\times$  Power Rating or max. Overload Voltage listed above whichever less.

### [For Jumper]

Part No. (inch size)	Rated Current (A)	Maximum Overload Current (A)
ERJXG (01005)	0.5	1
ERJ1G (0201)		
ERJ2G (0402)	1	2
ERJ3G (0603)		
ERJ6G (0805)		
ERJ8G (1206)		
ERJ14 (1210)	2	4
ERJ12 (1812)		
ERJ12Z (2010)		
ERJ1T (2512)		

### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure below.

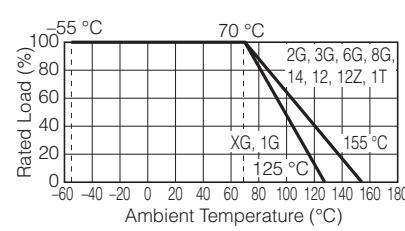

## Precision Thick Film Chip Resistors

Type: **ERJ XG, 1G**  
**ERJ 1R, 2R, 3R, 6R**  
**ERJ 3E, 6E, 8E, 14, 12, 1T**



### Features


- Small size and lightweight
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Compatible with placement machines  
Taping packaging available
- Suitable for both reflow and flow soldering
- Low Resistance Tolerance  
ERJXG, 1G, 2R, 3E, 6E, 8E, 14, 12, 1T Type :  $\pm 1\%$   
ERJ1R, 2R, 3R, 6R Type :  $\pm 0.5\%$
- Reference Standards  
IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified (Exemption ERJXG, ERJ1R)
- RoHS compliant

### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files


### Explanation of Part Numbers

- ERJ1R, 2R, 3R, 6R Type,  $\pm 0.5\%$

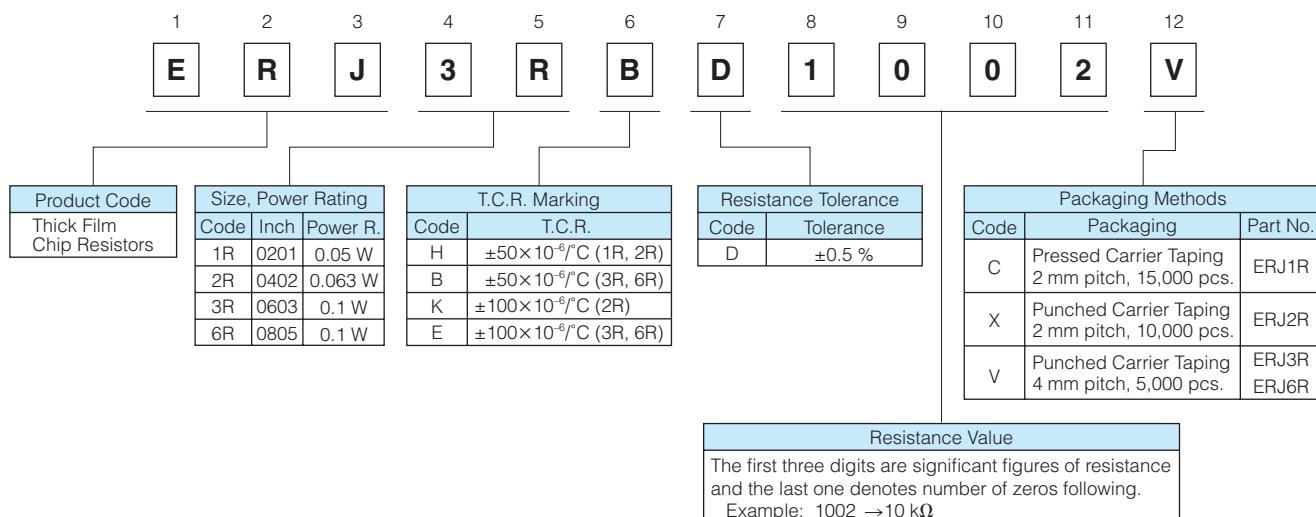

- ERJXG, 1G, 2R, 3E, 6E, 8E, 14, 12, 1T Type,  $\pm 1\%$

1 <b>E</b>	2 <b>R</b>	3 <b>J</b>	4 <b>8</b>	5 <b>E</b>	6 <b>N</b>	7 <b>F</b>	8 <b>1</b>	9 <b>0</b>	10 <b>0</b>	11 <b>2</b>	12 <b>V</b>																													
<hr/>																																								
Product Code											Size, Power Rating																													
Thick Film Chip Resistors											Code Inch Power R.																													
<table border="1"> <tr> <td>XGN</td><td>01005</td><td>0.031 W</td></tr> <tr> <td>1GN</td><td>0201</td><td>0.05 W</td></tr> <tr> <td>2RK</td><td>0402</td><td>0.1 W</td></tr> <tr> <td>3EK</td><td>0603</td><td>0.1 W</td></tr> <tr> <td>6EN</td><td>0805</td><td>0.125 W</td></tr> <tr> <td>8EN</td><td>1206</td><td>0.25 W</td></tr> <tr> <td>14N</td><td>1210</td><td>0.5 W</td></tr> <tr> <td>12N</td><td>1812</td><td>0.75 W</td></tr> <tr> <td>12S</td><td>2010</td><td>0.75 W</td></tr> <tr> <td>1TN</td><td>2512</td><td>1 W</td></tr> </table>											XGN	01005	0.031 W	1GN	0201	0.05 W	2RK	0402	0.1 W	3EK	0603	0.1 W	6EN	0805	0.125 W	8EN	1206	0.25 W	14N	1210	0.5 W	12N	1812	0.75 W	12S	2010	0.75 W	1TN	2512	1 W
XGN	01005	0.031 W																																						
1GN	0201	0.05 W																																						
2RK	0402	0.1 W																																						
3EK	0603	0.1 W																																						
6EN	0805	0.125 W																																						
8EN	1206	0.25 W																																						
14N	1210	0.5 W																																						
12N	1812	0.75 W																																						
12S	2010	0.75 W																																						
1TN	2512	1 W																																						
Resistance Tolerance																																								
<table border="1"> <tr> <td>Code</td><td>Tolerance</td></tr> <tr> <td>F</td><td><math>\pm 1\%</math></td></tr> </table>												Code	Tolerance	F	$\pm 1\%$																									
Code	Tolerance																																							
F	$\pm 1\%$																																							
Resistance Value																																								
<p>The first three digits are significant figures of resistance and the last one denotes number of zeros following. Decimal point is expressed by "R". Example : 1002 → 10 k<math>\Omega</math></p>																																								
Packaging Methods																																								
<table border="1"> <tr> <td>Code</td><td>Packaging</td><td>Part No.</td></tr> <tr> <td>Y</td><td>Pressed Carrier Taping 2 mm pitch, 20,000 pcs.</td><td>ERJXGN</td></tr> <tr> <td>C</td><td>Pressed Carrier Taping 2 mm pitch, 15,000 pcs.</td><td>ERJ1GN</td></tr> <tr> <td>X</td><td>Punched Carrier Taping 2 mm pitch, 10,000 pcs.</td><td>ERJ2RK</td></tr> <tr> <td>V</td><td>Punched Carrier Taping 4 mm pitch, 5,000 pcs.</td><td>ERJ3EK ERJ6EN ERJ8EN</td></tr> <tr> <td>U</td><td>Embossed Carrier Taping 4 mm pitch, 5,000 pcs.</td><td>ERJ14N ERJ12N ERJ12S</td></tr> <tr> <td></td><td>Embossed Carrier Taping 4 mm pitch, 4,000 pcs.</td><td>ERJ1TN</td></tr> </table>												Code	Packaging	Part No.	Y	Pressed Carrier Taping 2 mm pitch, 20,000 pcs.	ERJXGN	C	Pressed Carrier Taping 2 mm pitch, 15,000 pcs.	ERJ1GN	X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	ERJ2RK	V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ3EK ERJ6EN ERJ8EN	U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ14N ERJ12N ERJ12S		Embossed Carrier Taping 4 mm pitch, 4,000 pcs.	ERJ1TN								
Code	Packaging	Part No.																																						
Y	Pressed Carrier Taping 2 mm pitch, 20,000 pcs.	ERJXGN																																						
C	Pressed Carrier Taping 2 mm pitch, 15,000 pcs.	ERJ1GN																																						
X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	ERJ2RK																																						
V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ3EK ERJ6EN ERJ8EN																																						
U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ14N ERJ12N ERJ12S																																						
	Embossed Carrier Taping 4 mm pitch, 4,000 pcs.	ERJ1TN																																						

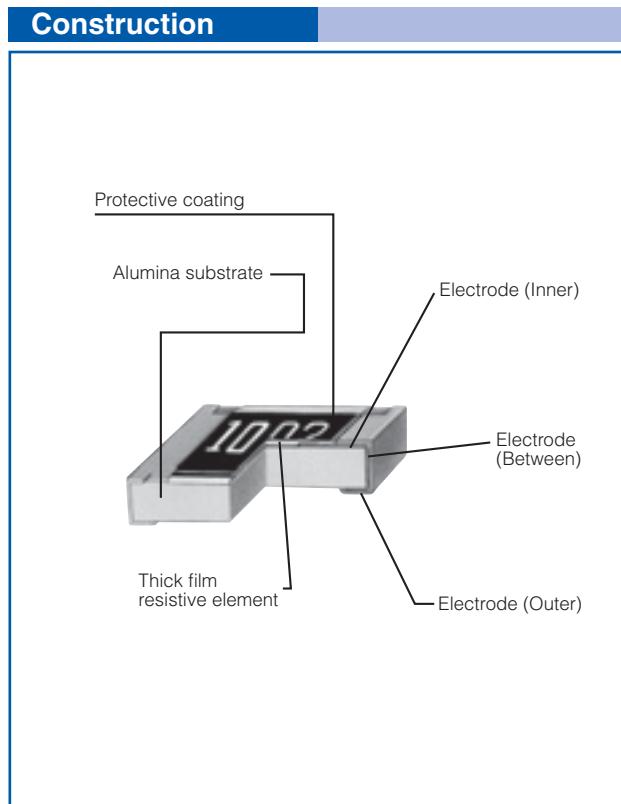

### Dimensions in mm (not to scale)

Dimensions in mm (not to scale)

Part No. (inch size)	Dimensions (mm)					Mass (Weight) [g/1000pcs.]
	L	W	a	b	t	
ERJXG (01005)	$0.40^{+0.02}$	$0.20^{+0.02}$	$0.10^{+0.03}$	$0.10^{+0.03}$	$0.13^{+0.02}$	0.04
ERJ1G, 1R (0201)	$0.60^{+0.03}$	$0.30^{+0.03}$	$0.10^{+0.05}$	$0.15^{+0.05}$	$0.23^{+0.03}$	0.15
ERJ2RK (0402)	$1.00^{+0.05}$	$0.50^{+0.05}$	$0.20^{+0.10}$	$0.25^{+0.05}$	$0.35^{+0.05}$	0.8
ERJ3RK ERJ3EK (0603)	$1.60^{+0.15}$	$0.80^{+0.15}_{-0.05}$	$0.30^{+0.20}$	$0.30^{+0.15}$	$0.45^{+0.10}$	2
ERJ6RN ERJ6EN (0805)	$2.00^{+0.20}$	$1.25^{+0.10}$	$0.40^{+0.20}$	$0.40^{+0.20}$	$0.60^{+0.10}$	4
ERJ8EN (1206)	$3.20^{+0.20}_{-0.20}$	$1.60^{+0.20}_{-0.15}$	$0.50^{+0.20}$	$0.50^{+0.20}$	$0.60^{+0.10}$	10
ERJ14N (1210)	$3.20^{+0.20}$	$2.50^{+0.20}$	$0.50^{+0.20}$	$0.50^{+0.20}$	$0.60^{+0.10}$	16
ERJ12N (1812)	$4.50^{+0.20}$	$3.20^{+0.20}$	$0.50^{+0.20}$	$0.50^{+0.20}$	$0.60^{+0.10}$	27
ERJ12S (2010)	$5.00^{+0.20}$	$2.50^{+0.20}$	$0.60^{+0.20}$	$0.60^{+0.20}$	$0.60^{+0.10}$	27
ERJ1TN (2512)	$6.40^{+0.20}$	$3.20^{+0.20}$	$0.65^{+0.20}$	$0.60^{+0.20}$	$0.60^{+0.10}$	45

### Ratings

<±0.5 %>

Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJ1RH (0201)	0.05	15	30	±0.5	1 k to 1 M (E24, E96)	±50	-55 to +125
ERJ2RH (0402)	0.063	50	100	±0.5	100 to 100 k (E24, E96)	±50	-55 to +125
ERJ2RK (0402)	0.063	50	100	±0.5	10 to 97.6 102 k to 1 M (E24, E96)	±100	-55 to +125
ERJ3RB (0603)	0.1	50	100	±0.5	100 to 100 k (E24, E96)	±50	-55 to +125
ERJ3RE (0603)	0.1	50	100	±0.5	10 to 97.6 102 k to 1 M (E24, E96)	±100	-55 to +125
ERJ6RB (0805)	0.1	150	200	±0.5	100 to 100 k (E24, E96)	±50	-55 to +125
ERJ6RE (0805)	0.1	150	200	±0.5	10 to 97.6 102 k to 1 M (E24, E96)	±100	-55 to +125

<±1 %>

Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJXGN (01005)	0.031	15	30	±1	10 to 1 M (E24, E96)	<100 Ω : ±300 100 Ω ≤ : ±200	-55 to +125
ERJ1GN (0201)	0.05	25	50	±1	10 to 1 M <sup>(3)</sup> (E24, E96)	±200	-55 to +125
ERJ2RK (0402)	0.1	50	100	±1	10 to 1 M <sup>(3)</sup> (E24, E96)	±100	-55 to +155
ERJ3EK (0603)	0.1	75	150	±1	10 to 1 M (E24, E96)	±100	-55 to +155
ERJ6EN (0805)	0.125	150	200	±1	10 to 2.2 M (E24, E96)	±100	-55 to +155
ERJ8EN (1206)	0.25	200	400	±1	10 to 2.2 M (E24, E96)	±100	-55 to +155
ERJ14N (1210)	0.5	200	400	±1	10 to 1 M (E24, E96)	±100	-55 to +155
ERJ12N (1812)	0.75	200	500	±1	10 to 1 M (E24, E96)	±100	-55 to +155
ERJ12S (2010)	0.75	200	500	±1	10 to 1 M (E24, E96)	±100	-55 to +155
ERJ1TN (2512)	1	200	500	±1	10 to 1 M (E24, E96)	±100	-55 to +155


(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $\text{RCWV} = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $\text{SOTV} = 2.5$  (Only ERJ2RK ±1% = 2.0) × Power Rating or max. Overload Voltage listed above whichever less.

(3) Please contact us when you need a type with a resistance of less than 10 Ω.

### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

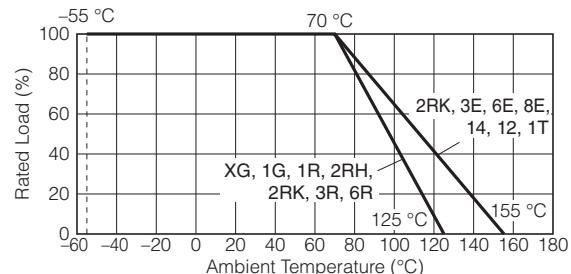

### Metal Film (Thin Film) Chip Resistors, High Reliability Type

Type: ERA 1A, 2A, 3A, 6A, 8A



#### Features

- High reliability ..... Stable at high temperature and humidity  
(85 °C 85 %RH rated load, Category temperature range : -55 to +155 °C)
- High accuracy ..... Small resistance tolerance and Temperature Coefficient of Resistance
- High performance ..... Low current noise, excellent linearity
- Reference Standard ..... IEC 60115-8, JIS C 5201-8, EIAJ RC-2133B
- AEC-Q200 qualified
- RoHS compliant

#### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files

#### Explanation of Part Numbers

- E24 Series


1	2	3	4	5	6	7	8	9	10	11			
E	R	A	3	A	E	B	1	0	2	V			
Product Code													
Metal Film Chip Resistors													
Size, Power Rating													
Code	Inch	Power Rating	Code	T.C.R.	Code	Tolerance	Code	Packaging Methods					
1A	0201	0.05 W	R	$\pm 10 \times 10^{-6} / ^\circ C$	W	$\pm 0.05 \%$	C	Pressed Carrier Taping					
2A	0402	0.063 W	P	$\pm 15 \times 10^{-6} / ^\circ C$	B	$\pm 0.1 \%$	X	2 mm pitch, 15000 pcs.					
3A	0603	0.1 W	E	$\pm 25 \times 10^{-6} / ^\circ C$	C	$\pm 0.25 \%$	V	Punched Carrier Taping					
6A	0805	0.125 W	H	$\pm 50 \times 10^{-6} / ^\circ C$	D	$\pm 0.5 \%$		4 mm pitch, 5000 pcs.					
8A	1206	0.25 W	K	$\pm 100 \times 10^{-6} / ^\circ C$				ERA1A					
Resistance Value													
Consist of three figures for E24 series resistance value. The first two digits are significant figures of resistance and the third one denotes number of zeros following. (example) 102 : 1 kΩ													

- E96 Series and other Resistance values


1	2	3	4	5	6	7	8	9	10	11	12			
E	R	A	3	A	E	B	1	0	5	1	V			
Product Code														
Metal Film Chip Resistors														
Size, Power Rating														
Code	Inch	Power Rating	Code	T.C.R.	Code	Tolerance	Code	Packaging Methods						
1A	0201	0.05 W	R	$\pm 10 \times 10^{-6} / ^\circ C$	W	$\pm 0.05 \%$	C	Pressed Carrier Taping						
2A	0402	0.063 W	P	$\pm 15 \times 10^{-6} / ^\circ C$	B	$\pm 0.1 \%$	X	2 mm pitch, 10000 pcs.						
3A	0603	0.1 W	E	$\pm 25 \times 10^{-6} / ^\circ C$	C	$\pm 0.25 \%$	V	Punched Carrier Taping						
6A	0805	0.125 W	H	$\pm 50 \times 10^{-6} / ^\circ C$	D	$\pm 0.5 \%$		4 mm pitch, 5000 pcs.						
8A	1206	0.25 W	K	$\pm 100 \times 10^{-6} / ^\circ C$				ERA1A						
Resistance Value														
Consist of four figures for E96 series resistance value. The first three digits are significant figures of resistance and the fourth one denotes number of zeros following. (example) 1051 : 1.05 kΩ														

note : Duplicated resistance values as E24 series part numbers shall follow E24 part numbers.  
(apply three digit resistance value)

### Construction

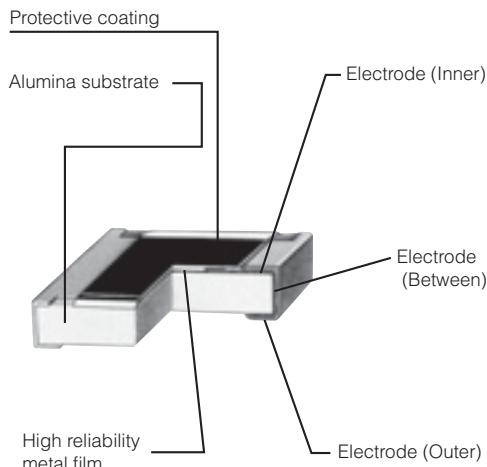

### Dimensions in mm (not to scale)

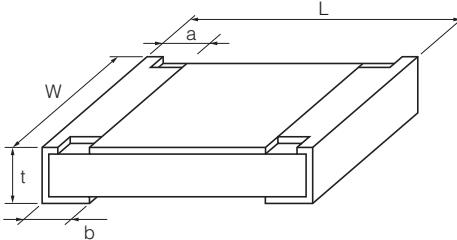

Part No. (inch size)	Dimensions (mm)					Mass (Weight) [g/1000 pcs.]
	L	W	a	b	t	
ERA1A (0201)	0.60 <sup>±0.03</sup>	0.30 <sup>±0.03</sup>	0.15 <sup>±0.05</sup>	0.15 <sup>±0.05</sup>	0.23 <sup>±0.03</sup>	0.14
ERA2A (0402)	1.00 <sup>±0.10</sup>	0.50 <sup>±0.10</sup>	0.15 <sup>±0.10</sup>	0.25 <sup>±0.10</sup>	0.35 <sup>±0.05</sup>	0.6
ERA3A (0603)	1.60 <sup>±0.20</sup>	0.80 <sup>±0.20</sup>	0.30 <sup>±0.20</sup>	0.30 <sup>±0.20</sup>	0.45 <sup>±0.10</sup>	2
ERA6A (0805)	2.00 <sup>±0.20</sup>	1.25 <sup>±0.10</sup>	0.40 <sup>±0.25</sup>	0.40 <sup>±0.25</sup>	0.50 <sup>±0.10</sup>	4
ERA8A (1206)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.15</sup>	0.50 <sup>±0.25</sup>	0.50 <sup>±0.25</sup>	0.60 <sup>±0.10</sup>	8

### Ratings

Part No. (inch size)	Power Rating at 85 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Part No. (detail)	Resistance Tolerance (%)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Resistance Range <sup>(3)(4)</sup> ( $\Omega$ )	Category Temperature Range ( $^{\circ}\text{C}$ )
ERA1A (0201)	0.05	25	50	ERA1AEB ERA1AEC	±0.1	±25	100 to 10 k (E24, E96)	-55 to +155
ERA2A (0402)	0.063	50	100		±0.25			
			ERA2AKD	±0.5	±100	10 to 46.4 (E24, E96)		
			ERA2AED	±0.5	±25	47 to 100 k (E24, E96)		
			ERA2AEB	±0.1	±15	200 to 47 k (E24, E96)		
			ERA2APB	±0.1	±25	47 to 330 k (E24, E96)		
			ERA2ARC	±0.25	±10	200 to 47 k (E24, E96)		
ERA3A (0603)	0.1	75	150	ERA3AHD ERA3AED ERA3AEB ERA3APB ERA3ARB ERA3ARW	±0.5	±50	10 to 46.4 (E24, E96)	-55 to +155
					±0.5	±25	47 to 100 k (E24, E96)	
					±0.1	±15	470 to 100 k (E24, E96)	
					±0.1	±10	1 k to 100 k (E24, E96)	
					±0.05	±50	10 to 46.4 (E24, E96)	
					±0.05	±25	47 to 1 M (E24, E96)	
ERA6A (0805)	0.125	100	200	ERA6AHD ERA6AED ERA6AEB ERA6APB ERA6ARB ERA6ARW	±0.5	±50	10 to 46.4 (E24, E96)	-55 to +155
					±0.5	±25	47 to 1 M (E24, E96)	
					±0.1	±15	470 to 100 k (E24, E96)	
					±0.1	±10	1 k to 100 k (E24, E96)	
					±0.05	±50	10 to 46.4 (E24, E96)	
					±0.05	±25	47 to 1 M (E24, E96)	
ERA8A (1206)	0.25	150	300	ERA8AHD ERA8AED ERA8AEB ERA8APB ERA8ARB ERA8ARW	±0.5	±50	10 to 46.4 (E24, E96)	-55 to +155
					±0.5	±25	47 to 1 M (E24, E96)	
					±0.1	±15	470 to 100 k (E24, E96)	
					±0.1	±10	1 k to 100 k (E24, E96)	
					±0.05	±50	10 to 46.4 (E24, E96)	
					±0.05	±25	47 to 1 M (E24, E96)	

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $\text{RCWV} = \sqrt{\text{Rated Power} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.


(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $\text{SOTV} = 2.5 \times \text{Power Rating}$  or max. Overload Voltage listed above whichever less.

(3) E192 series resistance values are also available. Please contact us for details.

(4) Duplicated resistance values between E96, E192 and E24 series shall follow E24 Part Numbers. (apply three digit resistance value)

### Power Derating Curve

For resistors operated in ambient temperatures above 85 °C, power rating shall be derated in accordance with the figure on the right.

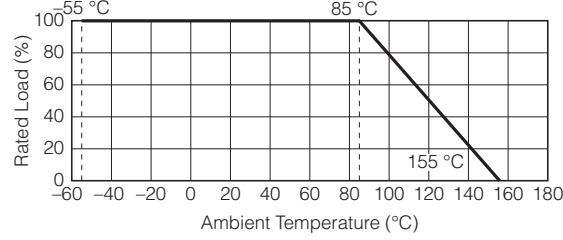

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.


## Thick Film Chip Resistors / Low Resistance Type

Type: **ERJ 2LW, 3LW**

**2BW, 3BW, 6BW,  
8BW, 8CW**

**ERJ 2B, 3B, 6B, 8B, 14B,  
3R, 6R, 8R, 14R,  
12R, 12Z, 1TR**

**ERJ L03, L06, L08, L14,  
L12, L1D, L1W**

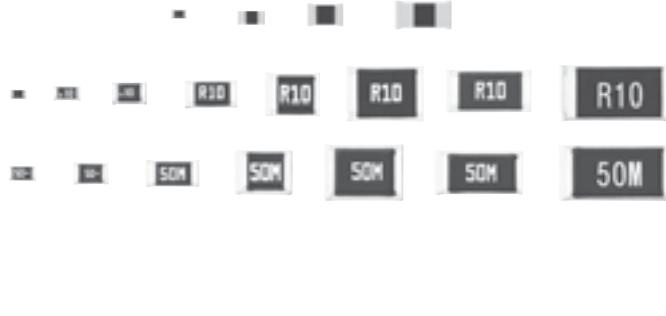

### Features

- Current Sensing resistor
- Small size and lightweight
- High reliability : Metal glaze thick film resistive element and three layers of electrodes
- Suitable for both reflow and flow soldering
- Improved high-power/resistance to pulse characteristics  
by double-sided resistive elements structure : ERJ2LW, 3LW, 2BW, 3BW, 6BW, 8BW, 8CW
- Low TCR :  $\pm 50 \times 10^{-6} / ^\circ\text{C}$  (ERJ8CW)
- Low Resistance Value
  - 5 mΩ, 10 mΩ : ERJ3LW
  - 10 mΩ : ERJ2LW
  - 10 mΩ to 50 mΩ : ERJ8CW
  - 10 mΩ to 100 mΩ : ERJ6BW, 8BW
  - 20 mΩ to 100 mΩ : ERJ3BW, ERJL14, L12
  - 40 mΩ to 100 mΩ : ERJL1D, L1W
  - 47 mΩ to 100 mΩ : ERJ2BW, ERJL03, L06, L08
- Reference Standards : IEC 60115-8, JIS C 5201-8, JEITA RC-2144
- AEC-Q200 qualified
- RoHS compliant

### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files

### Explanation of Part Numbers


- ERJ2LW, 3LW, 2BW, 3BW, 6BW, 8BW, 8CW <High power (double-sided resistive elements structure) type>

1	2	3	4	5	6	7	8	9	10	11	12
E	R	J	2	B	W	G	R	0	4	7	X
Product Code											
Code											
Inch											
Power Rating											
Resistance Value											
Resistance Tolerance											
Code											
Tolerance											
F											
G											
J											
Resistance Value											
Shown by 4 digits or letters. (Ex.) R047 : 0.047 Ω=47 mΩ											
Packaging Methods											
Code											
Packaging											
Part No.											
X											
Pressed Carrier Taping 2 mm pitch, 10,000 pcs.											
ERJ2LW ERJ2BW											
V											
Punched Carrier Taping 4 mm pitch, 5,000 pcs.											
ERJ3LW ERJ3BW											
ERJ6BW ERJ8BW											
ERJ8CW											


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

08 Oct. 2014

- ERJ2BS/2BQ, 3BS/3BQ, 6BS/6BQ, 8BS/8BQ, 14BS/14BQ, 3R, 6R, 8R, 14R, 12R, 12Z, 1TR <High power type/Standard type>

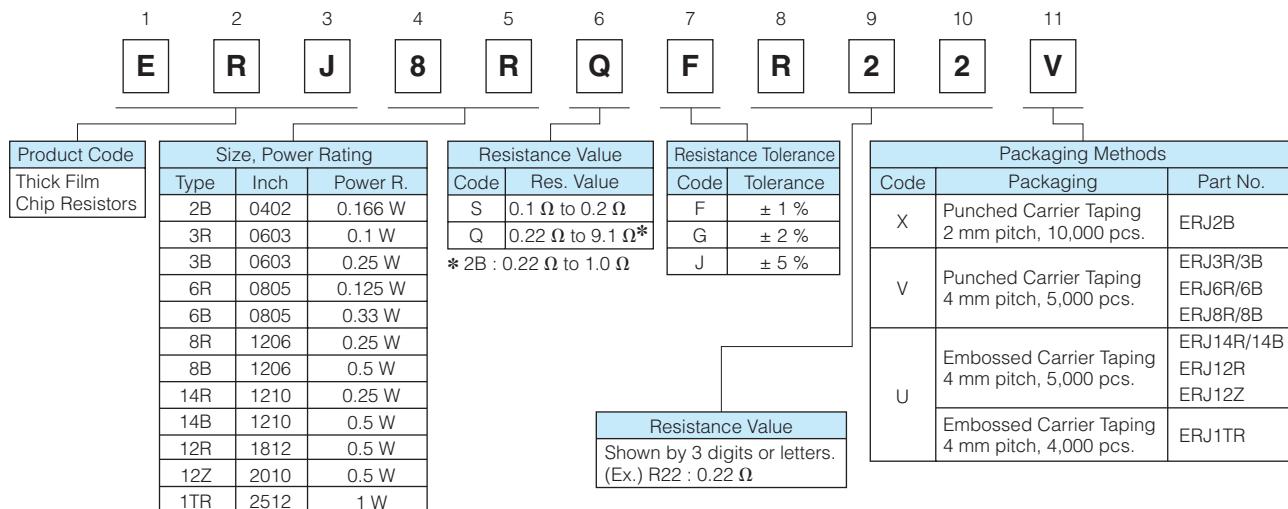

- ERJL03, L06, L08, L14, L12, L1D, L1W <Low TCR type>

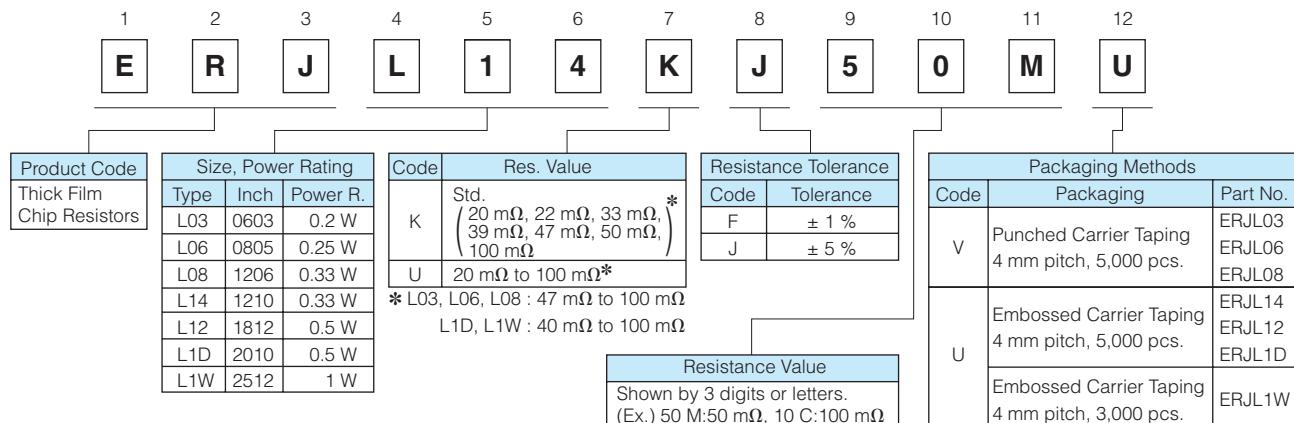

## Ratings

<High power (double-sided resistive elements structure) type>

Part No. (inch size)	Power Rating at 70 °C (W)	Resistance Tolerance (%)	Resistance <sup>(1)</sup> Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJ2LW (0402)	0.2	±1, ±2, ±5	10 m	0 to 500	-55 to +125
ERJ3LW (0603)	0.25	±1, ±2, ±5	5 m	0 to 700	-55 to +125
			10 m	0 to 300	-55 to +125
ERJ2BW (0402)	0.25	±1, ±2, ±5	47 m to 100 m (E24)	±300	-55 to +155
ERJ3BW (0603)	0.33	±1, ±2, ±5	20 m to 100 m (E24)	R<39m Ω : ±250 R≥39m Ω : ±150	-55 to +155
ERJ6BW (0805)	0.5	±1, ±2, ±5	10 m to 100 m (E24)	R<15m Ω : ±300 R≥15m Ω : ±200	-55 to +155
ERJ8BW (1206)	1	±1, ±2, ±5	10 m to 100 m (E24)	10 mΩ ≤ R < 20 mΩ : ±200 20 mΩ ≤ R < 47 mΩ : ±150 47 mΩ ≤ R ≤ 100 mΩ : ±100	-55 to +155
ERJ8CW (1206)	1	±1, ±2, ±5	10 m to 50 m (E24)	±50	-55 to +155 (10 m to 33 mΩ) -55 to +125 (36 m to 50 mΩ)

(1) Please contact us when resistors of irregular series are needed.

## Ratings

### <High power type>

Part No. (inch size)	Power Rating at 70 °C (W)	Resistance Tolerance (%)	Resistance <sup>(1)</sup> Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJ2BS (0402)	0.166	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 300$	-55 to +125
ERJ2BQ (0402)			0.22 to 1.0 (E24)	$\pm 250$	
ERJ3BS (0603)	0.25	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 300$	-55 to +125
ERJ3BQ (0603)			0.22 to 0.91 (E24)	$\pm 200$	
ERJ6BS (0805)			1.0 to 9.1 (E24)	$\pm 200$	
ERJ6BQ (0805)	0.33	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 250$	-55 to +125
ERJ8BS (1206)			0.22 to 0.91 (E24)	$\pm 250$	
ERJ8BQ (1206)			1.0 to 9.1 (E24)	$\pm 200$	
ERJ14BS (1210)	0.5	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 200$	-55 to +125
ERJ14BQ (1210)			0.22 to 0.91 (E24)	$\pm 100$	
			1.0 to 9.1 (E24)	$\pm 100$	

(1) Please contact us when resistors of irregular series are needed.

### <Standard type>

Part No. (inch size)	Power Rating at 70 °C (W)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJ3RS (0603)	0.1	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 300$	-55 to +125
ERJ3RQ (0603)			0.22 to 0.91 (E24)		
ERJ3RQ (0603)			1.0 to 9.1 (E24)	$\pm 200$	
ERJ6RS (0805)	0.125	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 250$	-55 to +125
ERJ6RQ (0805)			0.22 to 0.91 (E24)	$\pm 200$	
ERJ6RQ (0805)			1.0 to 9.1 (E24)	$\pm 200$	
ERJ8RS (1206)	0.25	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 250$	-55 to +125
ERJ8RQ (1206)			0.22 to 0.91 (E24)	$\pm 200$	
ERJ8RQ (1206)			1.0 to 9.1 (E24)	$\pm 200$	
ERJ14RS (1210)	0.25	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 200$	-55 to +125
ERJ14RQ (1210)			0.22 to 0.91 (E24)	$\pm 100$	
ERJ14RQ (1210)			1.0 to 9.1 (E24)	$\pm 100$	
ERJ12RS (1812)	0.5	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 200$	-55 to +125
ERJ12RQ (1812)			0.22 to 0.91 (E24)	$\pm 100$	
ERJ12RQ (1812)			1.0 to 9.1 (E24)	$\pm 100$	
ERJ12ZS (2010)	0.5	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 200$	-55 to +125
ERJ12ZQ (2010)			0.22 to 0.91 (E24)	$\pm 100$	
ERJ12ZQ (2010)			1.0 to 9.1 (E24)	$\pm 100$	
ERJ1TRS (2512)	1	$\pm 1, \pm 2, \pm 5$	0.10 to 0.20 (E24)	$\pm 200$	-55 to +125
ERJ1TRQ (2512)			0.22 to 0.91 (E24)	$\pm 100$	
ERJ1TRQ (2512)			1.0 to 9.1 (E24)	$\pm 100$	


### <Low TCR type>

Part No. (inch size)	Power Rating at 70 °C (W)	Resistance Tolerance (%)	Resistance <sup>(1)</sup> Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJL03 (0603)	0.2	$\pm 1, \pm 5$	47 m to 100 m	$\pm 200$	-55 to +125
ERJL06 (0805)	0.25	$\pm 1, \pm 5$	47 m to 100 m	$\pm 100$	-55 to +125
ERJL08 (1206)	0.33	$\pm 1, \pm 5$	47 m to 100 m	$\pm 100$	-55 to +125
ERJL14 (1210)	0.33	$\pm 1, \pm 5$	20 m to 100 m	$R < 47 \text{ m}\Omega : \pm 300$ $R \geq 47 \text{ m}\Omega : \pm 100$	-55 to +125
ERJL12 (1812)	0.5	$\pm 1, \pm 5$	20 m to 100 m		-55 to +125
ERJL1D (2010)	0.5	$\pm 1, \pm 5$	40 m to 100 m		-55 to +125
ERJL1W (2512)	1	$\pm 1, \pm 5$	40 m to 100 m		-55 to +125

(1) Standard R.V. : 20 mΩ, 22 mΩ, 33 mΩ, 39 mΩ, 47 mΩ, 50 mΩ, 100 mΩ, Custom R.V. : Each 1 mΩ within upper range.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

## Construction

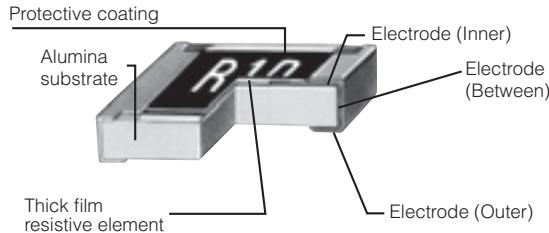


## Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure below.

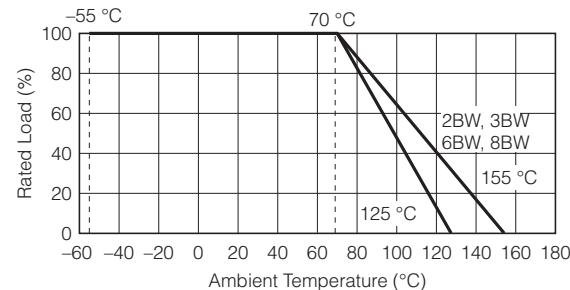


## Dimensions in mm (not to scale)

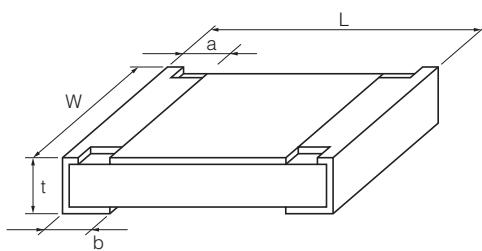

Part No. (inch size)	Dimensions (mm)					Mass(Weight) [g/1000 pcs.]
	L	W	a	b	t	
ERJ2LW (0402)	1.00 <sup>±0.10</sup>	0.50 <sup>±0.10</sup> <sub>0.05</sub>	0.25 <sup>±0.10</sup>	0.25 <sup>±0.10</sup>	0.40 <sup>±0.05</sup>	0.8
ERJ2BW (0402)	1.00 <sup>±0.10</sup>	0.50 <sup>±0.10</sup> <sub>0.05</sub>	0.24 <sup>±0.10</sup>	0.24 <sup>±0.10</sup>	0.35 <sup>±0.05</sup>	0.8
ERJ2BS ERJ2BQ	1.00 <sup>±0.10</sup>	0.50 <sup>±0.10</sup> <sub>0.05</sub>	0.20 <sup>±0.10</sup>	0.27 <sup>±0.10</sup>	0.35 <sup>±0.05</sup>	0.8
ERJ3LW (5 mΩ)	1.60 <sup>±0.15</sup>	0.80 <sup>±0.15</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.55 <sup>±0.10</sup>	3
ERJ3LW (10 mΩ) ERJ3BW	1.60 <sup>±0.15</sup>	0.80 <sup>±0.15</sup>	0.40 <sup>±0.20</sup>	0.40 <sup>±0.20</sup>	0.55 <sup>±0.10</sup>	3
ERJ3R ERJ3B ERJL03	1.60 <sup>±0.15</sup>	0.80 <sup>±0.15</sup> <sub>0.05</sub>	0.30 <sup>±0.20</sup>	0.30 <sup>±0.15</sup>	0.45 <sup>±0.10</sup>	2
ERJ6BW	2.00 <sup>±0.20</sup>	1.25 <sup>±0.20</sup>	0.55 <sup>±0.20</sup>	0.55 <sup>±0.20</sup>	0.65 <sup>±0.10</sup>	6
ERJ6R ERJ6B ERJL06	2.00 <sup>±0.20</sup>	1.25 <sup>±0.10</sup>	0.40 <sup>±0.20</sup>	0.40 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	4
ERJ8BW	3.20 <sup>±0.20</sup>	1.60 <sup>±0.20</sup>	1.00 <sup>±0.20</sup>	1.00 <sup>±0.20</sup>	0.65 <sup>±0.10</sup>	13
ERJ8CW (10 to 16 mΩ)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.20</sup>	1.10 <sup>±0.20</sup>	1.10 <sup>±0.20</sup>	0.65 <sup>±0.10</sup>	13
ERJ8CW (18 to 50 mΩ)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.65 <sup>±0.10</sup>	13
ERJ8R ERJ8B ERJL08	3.20 <sup>±0.05</sup> <sub>0.20</sub>	1.60 <sup>±0.05</sup> <sub>0.15</sub>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	10
ERJ14R ERJ14B ERJL14	3.20 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	16
ERJ12R ERJL12	4.50 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	27
ERJ12Z ERJL1D	5.00 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	27
ERJ1TR ERJL1W	6.40 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.65 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	45
	6.40 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.65 <sup>±0.20</sup>	1.30 <sup>±0.20</sup>	1.10 <sup>±0.10</sup>	79

## Current Sensing Resistors, Metal Plate Type

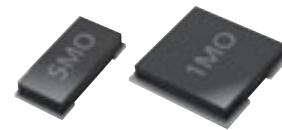

Type: ERJ MS4, MS6

### Features

- Ideal for current sensing solution
- Small case size with high power
- Metal plate bonding technology. Excellent long term stability
- Outer Resin with high heat dissipation. Wide temperature range (-65 °C to +170 °C)
- AEC-Q200 qualified
- RoHS compliant

### ■ As for Packaging Methods, Soldering Conditions and Safety Precautions,

Please see Data Files

### Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12																																																																							
E	R	J	M	S	4	S	F	2	M	0	U																																																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="3" style="background-color: #e0f2ff;">Product Code</td> <td colspan="3" style="background-color: #e0f2ff;">Type Code</td> <td colspan="3" style="background-color: #e0f2ff;">Resistance Tolerance</td> <td colspan="3" style="background-color: #e0f2ff;">Resistance Value</td> <td colspan="3" style="background-color: #e0f2ff;">Packaging Methods</td> </tr> <tr> <td colspan="3">Metal Plate Chip Resistors</td> <td>Code</td> <td>Inch size</td> <td>Electrode type</td> <td>Code</td> <td>Tolerance</td> <td colspan="3">Shown by 3 digits or letters. Decimal point is expressed by M as 2.0 mΩ=2M0, 0.5 mΩ=M50, 10.0 mΩ=10M</td> <td>Code</td> <td>Packaging</td> <td>Part No.</td> </tr> <tr> <td colspan="3">S4S</td> <td>2512</td> <td>Standard</td> <td></td> <td>F</td> <td>±1 %</td> <td colspan="3"></td> <td>U</td> <td>Embossed Carrier Taping 4 mm pitch, 2,000 pcs.</td> <td>ERJMS4</td> </tr> <tr> <td colspan="3">S4H</td> <td>2512</td> <td>Narrow</td> <td></td> <td></td> <td></td> <td colspan="3"></td> <td></td> <td>Embossed Carrier Taping 8 mm pitch, 1,000 pcs.</td> <td>ERJMS6</td> </tr> <tr> <td colspan="3">S6S</td> <td>2526</td> <td>Standard</td> <td></td> <td></td> <td></td> <td colspan="3"></td> <td></td> <td></td> <td></td> </tr> </table>												Product Code			Type Code			Resistance Tolerance			Resistance Value			Packaging Methods			Metal Plate Chip Resistors			Code	Inch size	Electrode type	Code	Tolerance	Shown by 3 digits or letters. Decimal point is expressed by M as 2.0 mΩ=2M0, 0.5 mΩ=M50, 10.0 mΩ=10M			Code	Packaging	Part No.	S4S			2512	Standard		F	±1 %				U	Embossed Carrier Taping 4 mm pitch, 2,000 pcs.	ERJMS4	S4H			2512	Narrow								Embossed Carrier Taping 8 mm pitch, 1,000 pcs.	ERJMS6	S6S			2526	Standard									
Product Code			Type Code			Resistance Tolerance			Resistance Value			Packaging Methods																																																																						
Metal Plate Chip Resistors			Code	Inch size	Electrode type	Code	Tolerance	Shown by 3 digits or letters. Decimal point is expressed by M as 2.0 mΩ=2M0, 0.5 mΩ=M50, 10.0 mΩ=10M			Code	Packaging	Part No.																																																																					
S4S			2512	Standard		F	±1 %				U	Embossed Carrier Taping 4 mm pitch, 2,000 pcs.	ERJMS4																																																																					
S4H			2512	Narrow								Embossed Carrier Taping 8 mm pitch, 1,000 pcs.	ERJMS6																																																																					
S6S			2526	Standard																																																																														

### Ratings

Part No. (inch size)	Power Rating at 70 °C (W)	Resistance Range (mΩ)	Resistance Tolerance (%)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)	Terminal temp. upper limit (°C)
ERJMS4S (2512)	3	1, 2, 3, 4	F : ±1	±75	-65 to +170	130
ERJMS4H (2512)	3	5, 6	F : ±1	±75	-65 to +170	130
ERJMS6S (2526)	2	7, 8, 9, 10	F : ±1	±75	-65 to +170	100
	5	0.5, 1, 2	F : ±1	±75	-65 to +170	130

\* Please contact us when resistors of irregular series are needed.


### Power Derating Curve

If the terminal temperature of the resistor is more than terminal temperature upper limit value of the rated table, please reduce the rated power according to the Power Derating Curve shown in the figure on the right.


<Supplemented>

In the case of the temperature measurement of the terminal portion of the resistor, Please perform under the following conditions.

- 1) Terminal temperature measurement, please apply the temperature of the higher of either the left or right electrode upper surface of the resistor.
- 2) Please measure the temperature of the resistor in the land pattern printed of circuit board and plan to use by real conditions.

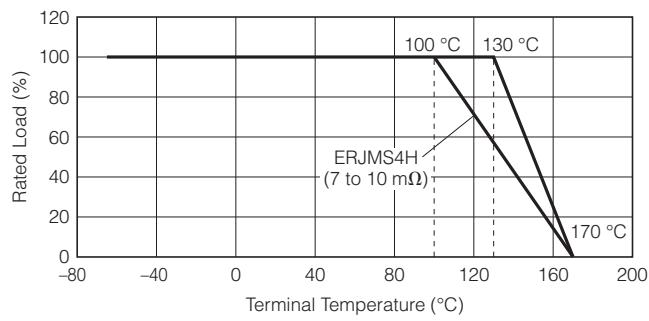


## Construction

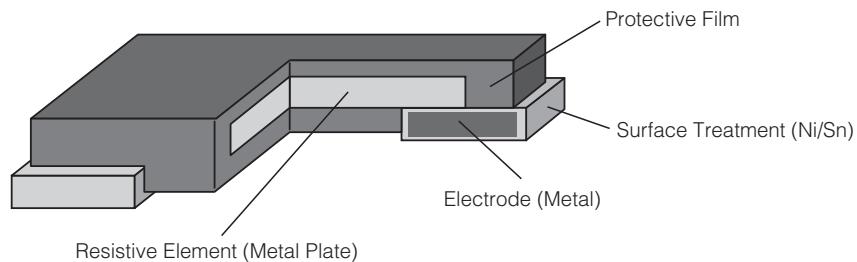


## Dimensions in mm (not to scale), Recommended Land Pattern


● ERJMS4S

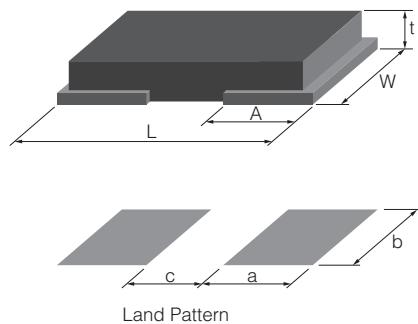

● ERJMS4H

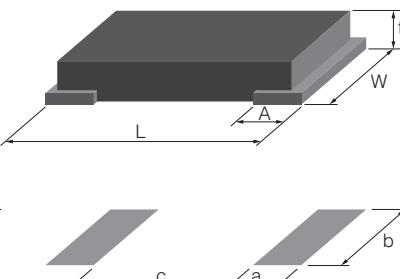


● ERJMS6S

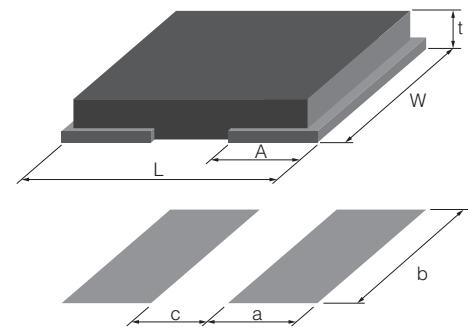


Part No. (inch size)	Dimension (mm)				Recommended Land Pattern (mm)			Mass (Weight) (g/1000 pcs.)
	L	W	A	t	a	b	c	
ERJMS4S (2512)	6.40±0.25	3.20±0.25	2.20±0.25	1.20±0.15	2.7	3.4	2.0	120
ERJMS4H (2512)	6.40±0.25	3.20±0.25	1.25±0.25	1.20±0.15	1.7	3.4	4.0	115
ERJMS6S (2526)	6.40±0.25	6.80±0.25	2.20±0.25	1.20±0.15	2.7	7.0	2.0	260

## Typical Temperature dependence of electrical resistance

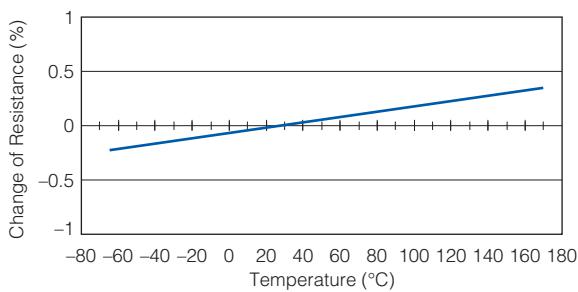


## Long-term stability

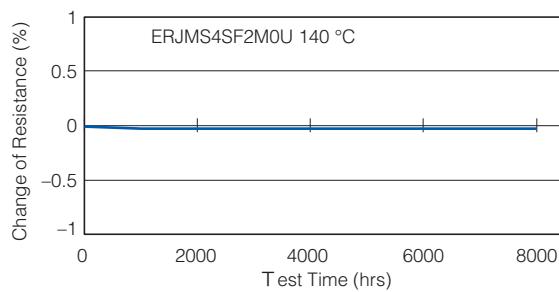


## Maximum pulse energy respectively pulse power for continuous operation

### ● ERJMS4 type

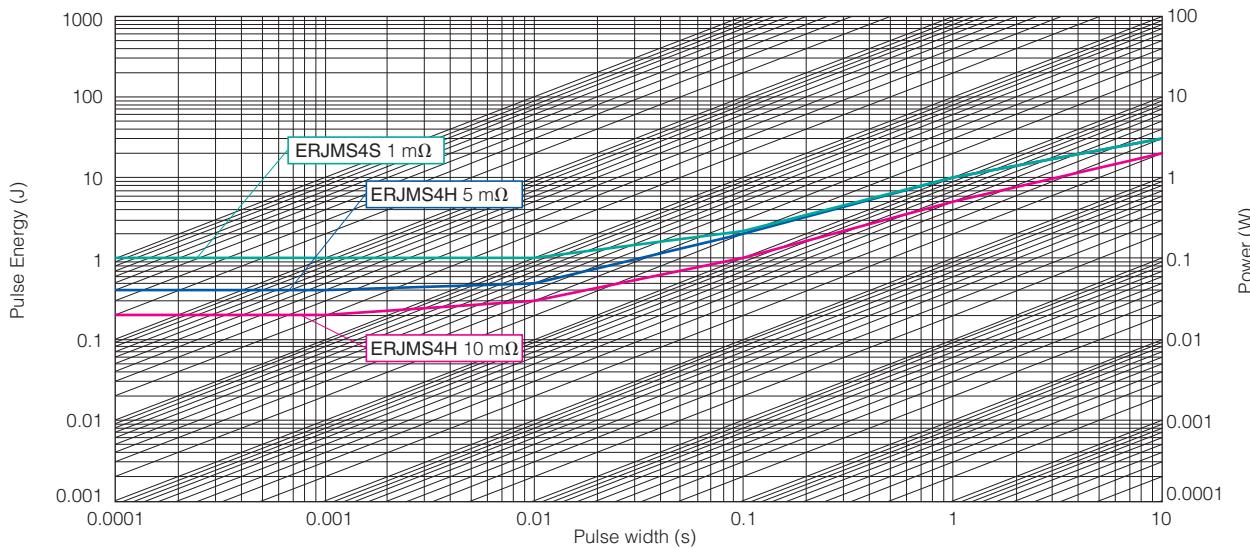

Reference Data  
Condition : Room Temperature, OFF : 10 s, 1000 cycle, Wave form : Square  
Change of Resistance=±1 %

### ● ERJMS6 type

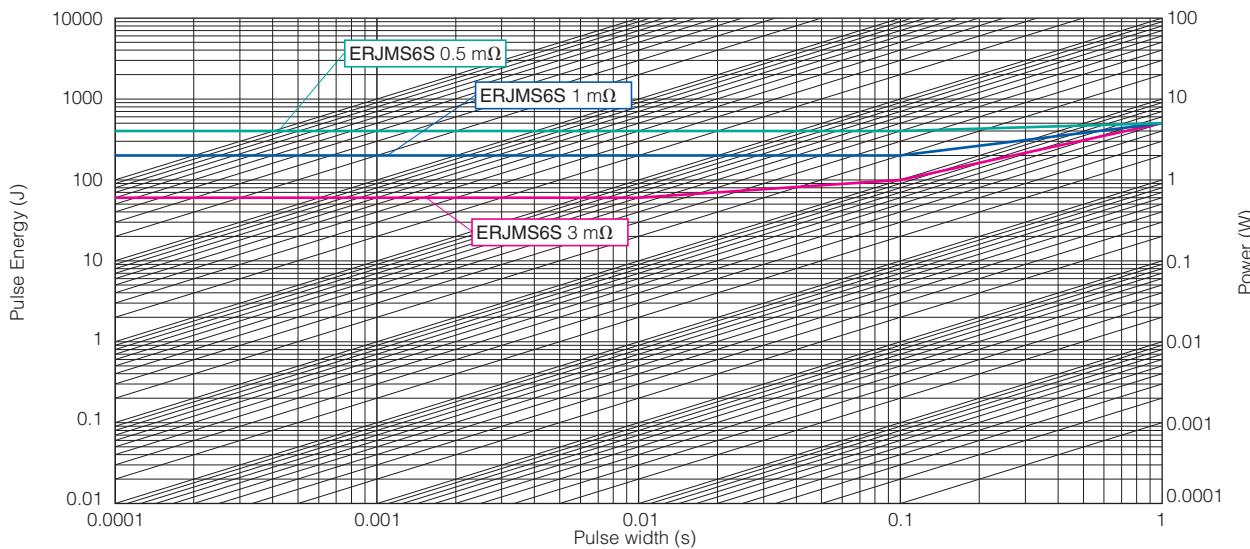

Reference Data  
Condition : Room Temperature, OFF : 10 s, 1000 cycle, Wave form : Square  
Change of Resistance=±1 %

## Performance (AEC-Q200)

### ● ERJMS4 type


Test Item	Test Condition	Specification	Typical value
Thermal Shock	MIL-STD-202 method 107 (-55 °C / +125 °C, 25 cycle)	±0.5 %	0.05 %
Overload	MIL-R-26E (5 x rated power, 5 sec)	±0.5 %	0.02 %
Solderability	MIL-STD-202 method 208	> 95% coverage	> 95% coverage
Resistance to Solvents	MIL-STD-202 method 215, 2.1a, 2.1d	No damage	No damage
Low Temperature Storage and Operation	MIL-STD-26E (-65 °C, 24 h)	±0.5 %	0.03 %
Resistance to Soldering Heat	MIL-STD-202 method 210 (260 °C, 10s)	±0.5 %	0.10 %
Moisture Resistance	MIL-STD-202 method 106	±0.5 %	0.20 %
Shock	MIL-STD-202 method 213-A	±0.5 %	0.10 %
Vibration, High Frequency	MIL-STD-202 method 204-B	±0.5 %	0.05 %
Life	MIL-STD-26E (Rated Power, 1.5 h-ON, 0.5 h-OFF, 2000 h)	±1 %	0.30 %
Storage Life at Elevated Temperature	MIL-STD-202 method 108-F (170 °C, 2000 h)	±1 %	0.30 %
High Temperature Characteristics	140 °C, 2000 h	±0.5 %	0.05 %
Frequency Characteristics	Inductance	< 2 nH	< 2 nH

### ● ERJMS6 type


Test Item	Test Condition	Specification	Typical value
Thermal Shock	MIL-STD-202 method 107 (-55 °C / +125 °C, 25 cycle)	±0.5 %	0.10 %
Overload	MIL-R-26E (5 x rated power, 5 sec)	±0.5 %	0.02 %
Solderability	MIL-STD-202 method 208	> 95% coverage	> 95% coverage
Resistance to Solvents	MIL-STD-202 method 215, 2.1a, 2.1d	No damage	No damage
Low Temperature Storage and Operation	MIL-STD-26E (-65 °C, 24 h)	±0.5 %	0.03 %
Resistance to Soldering Heat	MIL-STD-202 method 210 (260 °C, 10s)	±0.5 %	0.10 %
Moisture Resistance	MIL-STD-202 method 106	±0.5 %	0.10 %
Shock	MIL-STD-202 method 213-A	±0.5 %	0.10 %
Vibration, High Frequency	MIL-STD-202 method 204-B	±0.5 %	0.05 %
Life	MIL-STD-26E (Rated Power, 1.5 h-ON, 0.5 h-OFF, 2000 h)	±1 %	0.20 %
Storage Life at Elevated Temperature	MIL-STD-202 method 108-F (170 °C, 2000 h)	±1 %	0.30 %
High Temperature Characteristics	140 °C, 2000 h	±0.5 %	0.05 %
Frequency Characteristics	Inductance	< 2 nH	< 2 nH

## Temperature Rise

### ● ERJMS4HF5MOU

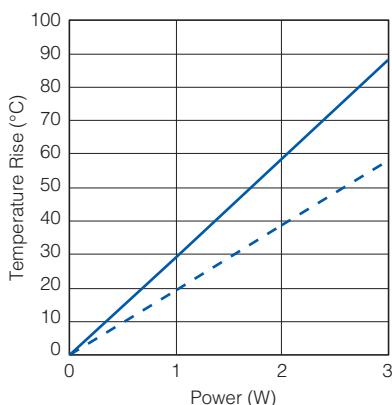


### ● ERJMS6SF2MOU

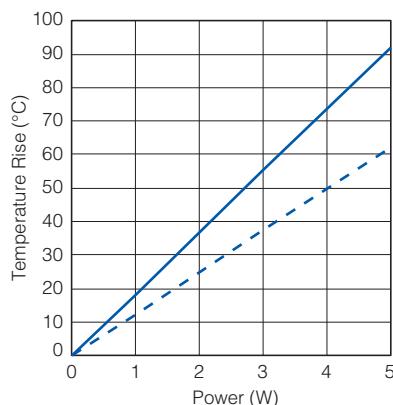


① Solid line  
② Dashed line

<Condition>  
Base material : FR-4 (t1.6mm)  
Copper Thickness : 70 µm, Two layer



## Sense terminal-Layout

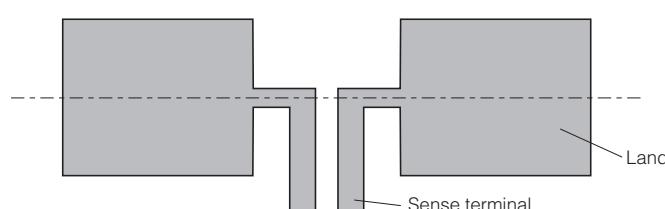

## Current Sensing Resistors, Metal Plate Type

Type: **ERJM1W**



### Features

- Low resistance values and high precision (1 mΩ to 20 mΩ)
- Stable resistance not influenced by measurement position
- High heat emission
- Low profile, strong body
- Inductance less than 1.0 nH for the metal plate structure
- RoHS compliant

### ■ As for Packaging Methods, Soldering Conditions and Safety Precautions,

Please see Data Files

### Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
<b>E</b>	<b>R</b>	<b>J</b>	<b>M</b>	<b>1</b>	<b>W</b>	<b>S</b>	<b>F</b>	<b>3</b>	<b>M</b>	<b>0</b>	<b>U</b>
Product Code											
Thick Film Chip Resistors											
Size, Power Rating											
Code Inch Power R.											
M1W 2512 1 W											
Code											
Type											
S General type											
T Wide terminal type											
Resistance Tolerance											
Code											
Tolerance											
F $\pm 1\%$											
J $\pm 5\%$											
Packaging Methods											
Code											
Packaging											
U Embossed Carrier Taping 4 mm pitch, 3,000 pcs.											
Resistance Value											
Shown by 3 digits or letters. Decimal point is expressed by M as 3 mΩ=3M0, 10 mΩ=10M											


### Ratings

Part No. (inch size)	Power Rating at 70 °C (W)	Standard Resistance (mΩ)	Resistance Tolerance (%)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)	Circuit board of use
ERJM1WS (2512)	1	3, 4	F: $\pm 1$ , J: $\pm 5$	$\pm 350$	-55 to +170	You should use the aluminum substrate when the added wattage exceeds 0.5 W.
ERJM1WT (2512)		5, 6, 10, 15, 20		$\pm 100$		
		1, 1.5		350 $\pm 100$		
		2, 3, 4		100 $\pm 50$		

\* Please contact the factory for other values and the range



### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

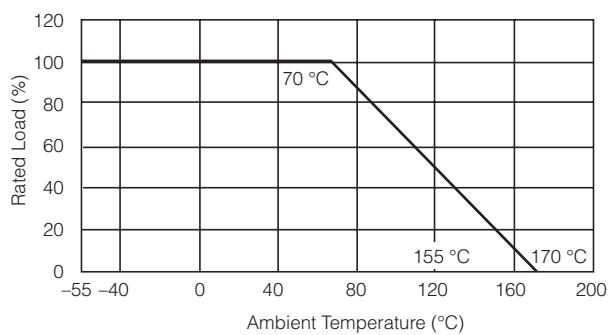


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

08 Oct. 2014

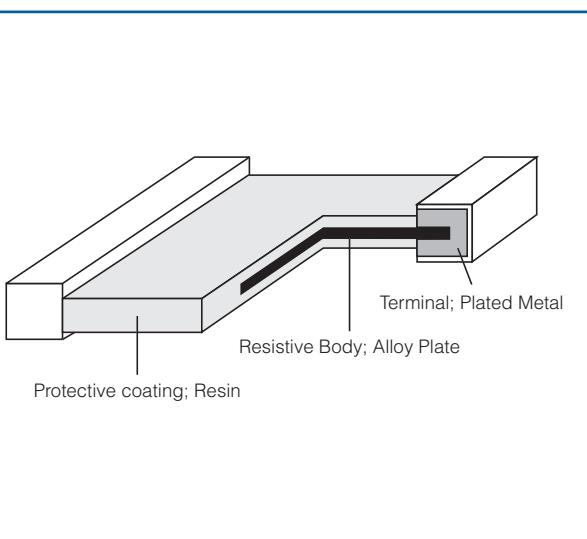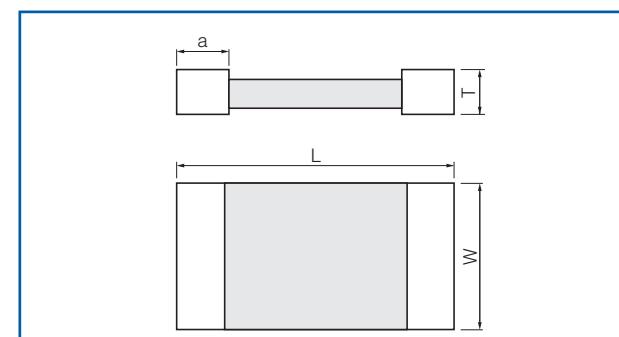Construction	Dimensions in mm (not to scale)
	

## Recommended Land Pattern

- An example of a land pattern

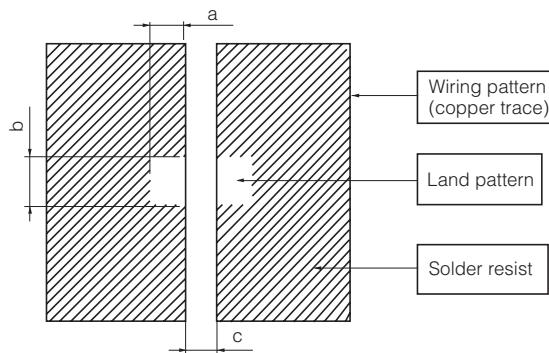

Part No.	Dimensions (mm)		
	a	b	c
ERJM1WS	2.1	3.4	4.2
ERJM1WT	3.1	3.4	2.2

## High Power Chip Resistors / Wide Terminal Type



Type: **ERJ A1, B1, B2, B3**

### Features

- High solder-joint reliability by wide terminal construction
- Excellent heat dissipation characteristics by wide terminal construction
- AEC-Q200 qualified
- RoHS compliant

### Recommended Applications

- Automotive electronic circuits including ECUs (Electrical control unit), anti-lock breaking systems and air-bag systems
- Current sensing for power supply circuits in a variety of equipment

### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files

### Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11															
E	R	J	A	1	A	J	1	0	2	U															
Product Code																									
Thick Film Chip Resistors																									
Size, Power Rating																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Inch</th> <th>Power R.</th> </tr> </thead> <tbody> <tr> <td>A1</td> <td>1225</td> <td>1.33 W</td> </tr> <tr> <td>B1</td> <td>1020</td> <td>1 W, 2 W (R ≤ 10 Ω)</td> </tr> <tr> <td>B2</td> <td>0612</td> <td>0.75 W, 1 W (R ≤ 10 Ω)</td> </tr> <tr> <td>B3</td> <td>0508</td> <td>0.33 W, 0.5 W (R ≤ 1 Ω)</td> </tr> </tbody> </table>											Code	Inch	Power R.	A1	1225	1.33 W	B1	1020	1 W, 2 W (R ≤ 10 Ω)	B2	0612	0.75 W, 1 W (R ≤ 10 Ω)	B3	0508	0.33 W, 0.5 W (R ≤ 1 Ω)
Code	Inch	Power R.																							
A1	1225	1.33 W																							
B1	1020	1 W, 2 W (R ≤ 10 Ω)																							
B2	0612	0.75 W, 1 W (R ≤ 10 Ω)																							
B3	0508	0.33 W, 0.5 W (R ≤ 1 Ω)																							
Resistance Value Region																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>A</th> <th>10 Ω ≤ R</th> </tr> <tr> <th></th> <th>B</th> <th>0.22 Ω ≤ R &lt; 10 Ω</th> </tr> <tr> <th></th> <th>C</th> <th>0.01 Ω ≤ R &lt; 0.22 Ω</th> </tr> <tr> <th></th> <th>D</th> <th>0.005 Ω ≤ R &lt; 0.01 Ω</th> </tr> </thead> </table>												A	10 Ω ≤ R		B	0.22 Ω ≤ R < 10 Ω		C	0.01 Ω ≤ R < 0.22 Ω		D	0.005 Ω ≤ R < 0.01 Ω			
	A	10 Ω ≤ R																							
	B	0.22 Ω ≤ R < 10 Ω																							
	C	0.01 Ω ≤ R < 0.22 Ω																							
	D	0.005 Ω ≤ R < 0.01 Ω																							
Resistance Tolerance																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>F</th> <th>± 1 %</th> </tr> <tr> <th></th> <th>G</th> <th>± 2 %</th> </tr> <tr> <th></th> <th>J</th> <th>± 5 %</th> </tr> </thead> </table>												F	± 1 %		G	± 2 %		J	± 5 %						
	F	± 1 %																							
	G	± 2 %																							
	J	± 5 %																							
Resistance Value																									
<p>Shown by 3 digits or letters. Only when it is impossible, shown by 4 digits or letters. (Ex.) 102 : 1.0 kΩ      R01 : 0.01 Ω = 10 mΩ 4R7 : 4.7 Ω      R015 : 0.015 Ω = 15 mΩ</p>																									
Packaging Methods																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Packaging</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>V</td> <td>Punched Carrier Taping 4 mm pitch, 5,000 pcs.</td> <td>ERJB2 ERJB3</td> </tr> <tr> <td>U</td> <td>Embossed Carrier Taping 4 mm pitch, 5,000 pcs.</td> <td>ERJB1</td> </tr> <tr> <td></td> <td>Embossed Carrier Taping 4 mm pitch, 4,000 pcs.</td> <td>ERJA1</td> </tr> </tbody> </table>											Code	Packaging	Part No.	V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJB2 ERJB3	U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJB1		Embossed Carrier Taping 4 mm pitch, 4,000 pcs.	ERJA1			
Code	Packaging	Part No.																							
V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJB2 ERJB3																							
U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJB1																							
	Embossed Carrier Taping 4 mm pitch, 4,000 pcs.	ERJA1																							

### Ratings


Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}$ /°C)	Category Temperature Range (°C)
ERJA1 (1225)	1.33	200	400	±1	100 m to 10 k (E24)	R < 100 mΩ : ±350 100 mΩ ≤ R : ±100 (±1%) ±200 (±2%, ±5%)	-55 to +155
				±2, ±5	10 m to 10 k (E24)		
ERJB1 (1020)	1 2(R ≤ 10 Ω)	200	400	±1, ±2, ±5	10 m to 10 k (E24)	R < 22 mΩ : ±350 22 mΩ ≤ R < 47 mΩ : ±200 47 mΩ ≤ R < 100 mΩ : ±150 (±1%) ±200 (±2%, ±5%) 100 mΩ ≤ R : ±100 (±1%) ±200 (±2%, ±5%)	-55 to +155
ERJB2 (0612)	0.75 1(R ≤ 10 Ω)	200	400	±1, ±2	10 m to 1 M (E24)	R < 22 mΩ : 0 to +300 22 mΩ ≤ R < 47 mΩ : 0 to +200 47 mΩ ≤ R < 100 mΩ : 0 to +150 100 mΩ ≤ R < 220 mΩ : 0 to +150 (±1%) 0 to +200 (±2%, ±5%) 220 mΩ ≤ R : ±100 (±1%) ±200 (±2%, ±5%)	-55 to +155
ERJB3 (0508)	0.33 0.5(R ≤ 1 Ω)	150	200	±1, ±2, ±5	20 m to 10 (E24)		

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{Power\ Rating \times Resistance\ Values}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times Power\ Rating$  or max. Overload Voltage listed above whichever less.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

## Construction (Example : ERJA1 type)

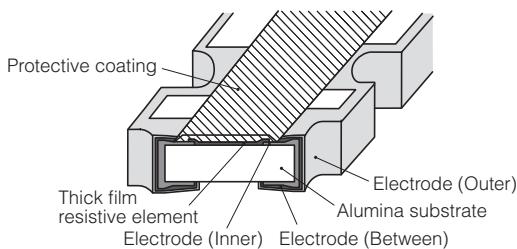


## Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure below.

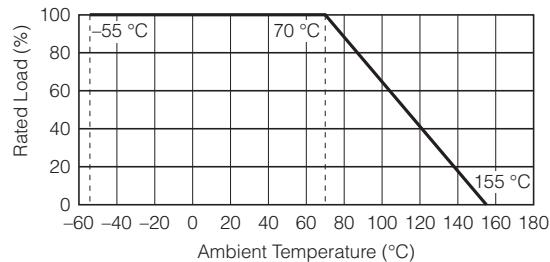

## Dimensions in mm (not to scale)


ERJA1 type

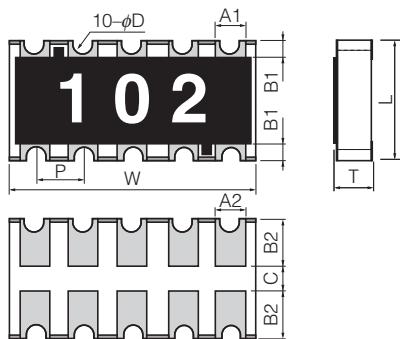

Mass (Weight) [1000 pcs.] : 40 g

Dimensions (mm)	L	W	T	A <sub>1</sub>	B <sub>1</sub>
3.20±0.20	6.40±0.20	0.55±0.10	0.70±0.20	0.45±0.20	
A <sub>2</sub>	B <sub>2</sub>	P	φD	C	
0.70±0.20	1.25±0.15	1.27±0.10	0.30 <sup>+0.10</sup> <sub>-0.20</sub>	0.4 min.	


ERJB2 type

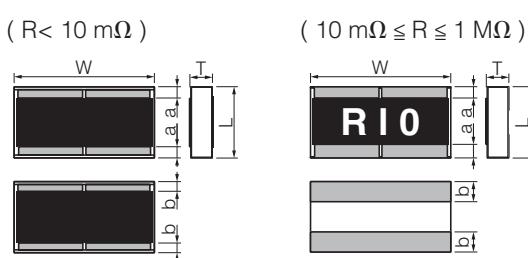

Mass (Weight) [1000 pcs.] : 11 g

Dimensions (mm)	L	W	T	a	b
5 mΩ≤R<10 mΩ			0.65±0.15	0.30±0.20	
10 mΩ≤R<220 mΩ	1.60±0.15	3.20±0.20	0.55±0.15	0.25±0.20	0.50±0.20
220 mΩ≤R≤1 MΩ					


ERJB1 type



Mass (Weight) [1000 pcs.] : 27 g

Dimensions (mm)	L	W	T	a	b
2.50±0.20	5.00±0.20	0.55±0.20	0.25±0.20	0.90±0.20	

ERJB3 type




Mass (Weight) [1000 pcs.] : 4.8 g


Dimensions (mm)	L	W	T	a	b
1.25±0.10	2.00±0.15	0.50±0.10	0.25±0.20	0.40±0.20	

## Circuit Configuration


ERJA1 type



ERJB1 type




ERJB3 type




ERJB2 type


< Less than 10 mΩ >



< Low resistance zone >



< High resistance zone >



## Anti-Surge Thick Film Chip Resistors

Type: **ERJ P03, PA3, P06, P08, P14**



### Features

- ESD surge characteristics superior to standard metal film resistors
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Suitable for both reflow and flow soldering
- High power ... 0.20 W : 0603 inch / 1608 mm size (ERJP03)  
0.25 W : 0603 inch / 1608 mm size (ERJPA3)  
0.50 W : 0805 inch / 2012 mm size (ERJP06), 1210 inch / 3225 mm size (ERJP14)  
0.66 W : 1206 inch / 3216 mm size (ERJP08)
- Reference Standards ... IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified
- RoHS compliant


### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files


### Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12									
<b>E</b>	<b>R</b>	<b>J</b>	<b>P</b>	<b>0</b>	<b>6</b>	<b>D</b>	<b>1</b>	<b>0</b>	<b>0</b>	<b>2</b>	<b>V</b>									
<hr/>																				
Product Code Thick Film Chip Resistors	Size, Power Rating Code Inch Power R.	Resistance Tolerance Code Tolerance	Resistance Value																	
P03	0603 0.20 W	D $\pm 0.5\%$	The first two or three digits are significant figures of resistance and the third or 4th one denotes number of zeros following. Three digit type ( $\pm 5\%$ ), four digit type ( $\pm 1\%$ , $\pm 0.5\%$ ). Example: 222 $\rightarrow$ 2.2 k $\Omega$ , 1002 $\rightarrow$ 10 k $\Omega$																	
PA3	0603 0.25 W	F $\pm 1\%$																		
P06	0805 0.50 W	J $\pm 5\%$																		
P08	1206 0.66 W																			
P14	1210 0.50 W																			
<hr/>																				
Packaging Methods																				
Code	Packaging	Part No.																		
V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJP03 ERJPA3 ERJP06 ERJP08																		
U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJP14																		

### Construction

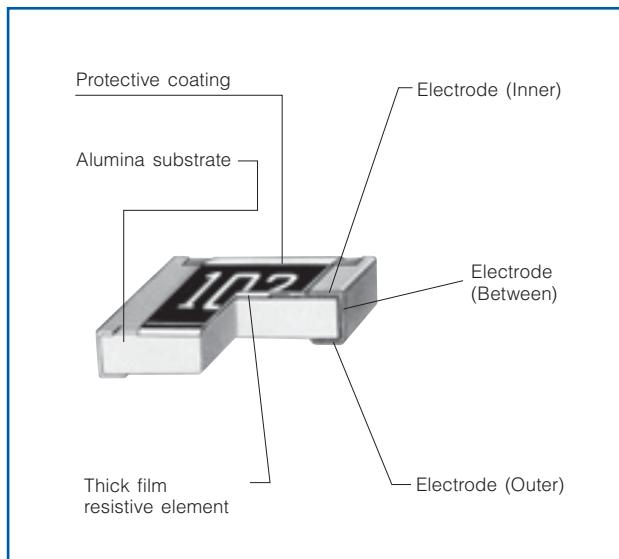

### Dimensions in mm (not to scale)

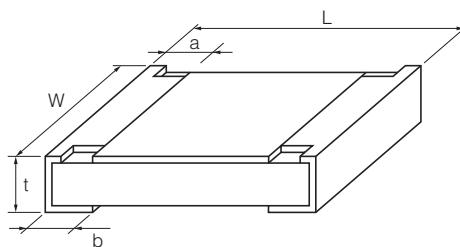

Part No. (inch size)	Dimensions (mm)					Mass (Weight) [g/1000 pcs.]
	L	W	a	b	t	
ERJP03 (0603)	$1.60^{\pm 0.15}$	$0.80^{\pm 0.05}$	$0.15^{\pm 0.10}$	$0.30^{\pm 0.15}$	$0.45^{\pm 0.10}$	2
ERJPA3 (0603)	$1.60^{\pm 0.15}$	$0.80^{\pm 0.05}$	$0.15^{\pm 0.10}$	$0.25^{\pm 0.10}$	$0.45^{\pm 0.10}$	2
ERJP06 (0805)	$2.00^{\pm 0.20}$	$1.25^{\pm 0.10}$	$0.25^{\pm 0.20}$	$0.40^{\pm 0.20}$	$0.60^{\pm 0.10}$	4
ERJP08 (1206)	$3.20^{\pm 0.20}$	$1.60^{\pm 0.15}$	$0.40^{\pm 0.20}$	$0.50^{\pm 0.20}$	$0.60^{\pm 0.10}$	10
ERJP14 (1210)	$3.20^{\pm 0.20}$	$2.50^{\pm 0.20}$	$0.35^{\pm 0.20}$	$0.50^{\pm 0.20}$	$0.60^{\pm 0.10}$	16

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

07 Oct. 2014

Ratings							
Part No. (inch size)	Power Rating <sup>(3)</sup> at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. (× 10 <sup>-6</sup> /°C)	Category Temperature Range (°C)
ERJP03 (0603)	0.20	150	200	±0.5	10 to 1M (E24, E96)	±150	-55 to +155
				±1	10 to 1M (E24, E96)	±200	
				±5	1 to 1M (E24)	R < 10 Ω : -150 to +400 10 Ω ≤ R : ±200	
ERJPA3 (0603)	0.25	150	200	±0.5, ±1	10 to 1M (E24, E96)	±100	-55 to +155
				±5	1 to 1.5M (E24)	±200	
ERJP06 (0805)	0.50	400	600	±0.5, ±1	10 to 1M (E24, E96)	R < 33 Ω : ±300 33 Ω ≤ R : ±100	-55 to +155
				±5	1 to 3.3M (E24)	R < 10 Ω : -100 to +600 10 Ω ≤ R < 33 Ω : ±300 33 Ω ≤ R : ±200	
ERJP08 (1206)	0.66	500	1000	±0.5, ±1	10 to 1M (E24, E96)	±100	-55 to +155
				±5	1 to 10M (E24)	R < 10 Ω : -100 to +600 10 Ω ≤ R : ±200	
ERJP14 (1210)	0.50	200	400	±0.5, ±1	10 to 1M (E24, E96)	±100	-55 to +155
				±5	1 to 1M (E24)	R < 10 Ω : -100 to +600 10 Ω ≤ R : ±200	

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Values, or Limiting Element Voltage}}$  listed above, whichever less.


(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times \text{Power Rating or max. Overload Voltage}$  listed above whichever less.

(3) Use it on the condition that the case temperature is below 155 °C.


### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.


\* When the temperature of ERJP14 is 155 °C or less, the derating start temperature can be changed to 125 °C. (See the dotted line)

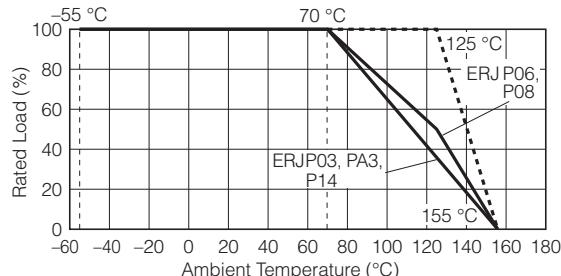

### ESD Characteristic

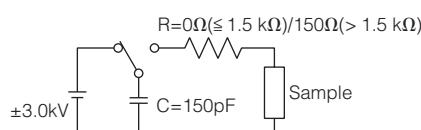

— Anti-Surge Thick Film Chip Resistors(ERJP Type)  
- - - Thick Film Chip Resistors(ERJ Type)

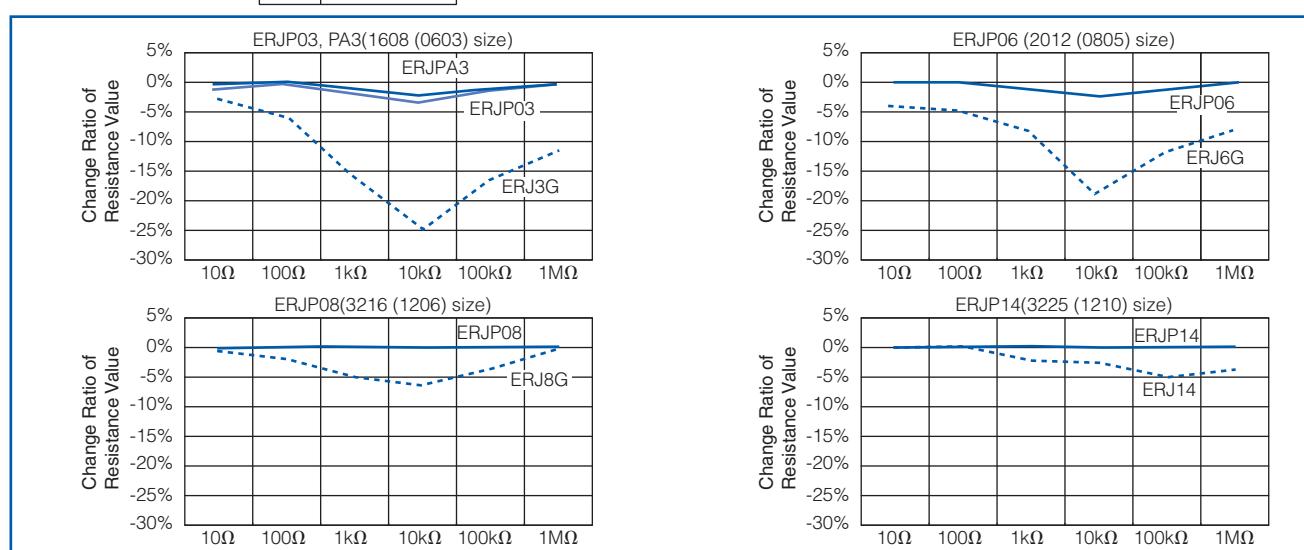

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

## Anti-Pulse Thick Film Chip Resistors



Type: **ERJ T06, T08, T14**

### Features

- Anti-Pulse characteristics  
High pulse characteristics achieved by the optimized trimming specifications
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Suitable for both reflow and flow soldering
- High power … 0.25W : 0805 inch / 2012 mm size (ERJT06)  
0.33W : 1206 inch / 3216 mm size (ERJT08)  
0.50W : 1210 inch / 3225 mm size (ERJT14)
- Reference Standards…IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified
- RoHS compliant


### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files


### Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11												
E	R	J	T	0	6	J	1	0	0	V												
Product Code																						
Thick Film Chip Resistors																						
Size, Power Rating																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Inch</th> <th>Power R.</th> </tr> </thead> <tbody> <tr> <td>T06</td> <td>0805</td> <td>0.25 W</td> </tr> <tr> <td>T08</td> <td>1206</td> <td>0.33 W</td> </tr> <tr> <td>T14</td> <td>1210</td> <td>0.5 W</td> </tr> </tbody> </table>											Code	Inch	Power R.	T06	0805	0.25 W	T08	1206	0.33 W	T14	1210	0.5 W
Code	Inch	Power R.																				
T06	0805	0.25 W																				
T08	1206	0.33 W																				
T14	1210	0.5 W																				
Resistance Tolerance																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Tolerance</th> </tr> </thead> <tbody> <tr> <td>J</td> <td>± 5 %</td> </tr> </tbody> </table>											Code	Tolerance	J	± 5 %								
Code	Tolerance																					
J	± 5 %																					
Packaging Methods																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Packaging</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>V</td> <td>Punched Carrier Taping 4 mm pitch, 5,000 pcs.</td> <td>ERJT06 ERJT08</td> </tr> <tr> <td>U</td> <td>Embossed Carrier Taping 4 mm pitch, 5,000 pcs.</td> <td>ERJT14</td> </tr> </tbody> </table>											Code	Packaging	Part No.	V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJT06 ERJT08	U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJT14			
Code	Packaging	Part No.																				
V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJT06 ERJT08																				
U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJT14																				
Resistance Value																						
The first two digits are significant figures of resistance and the third one denotes number of zeros following. Example: 222→2.2 kΩ																						

### Construction

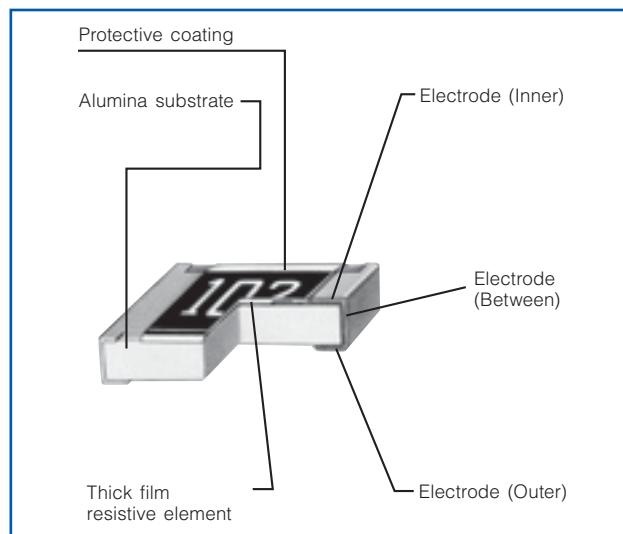

### Dimensions in mm (not to scale)

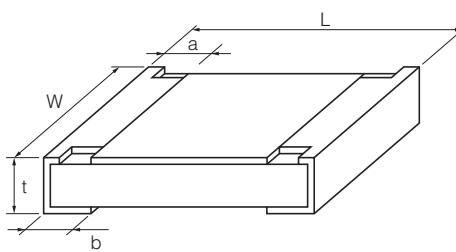

Part No. (inch size)	Dimensions (mm)					Mass (Weight) [g/1000 pcs.]
	L	W	a	b	t	
ERJT06 (0805)	2.00 <sup>±0.20</sup>	1.25 <sup>±0.10</sup>	0.25 <sup>±0.20</sup>	0.40 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	4
ERJT08 (1206)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.15</sup>	0.40 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	10
ERJT14 (1210)	3.20 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>	0.35 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	16

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

04 Sep. 2014

### Ratings


Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}/\text{°C}$ )	Category Temperature Range (°C)
ERJT06 (0805)	0.25	150	200	±5	1 to 1 M (E24)	Less than 10 Ω : -100 to +600 Less than 33 Ω : ±300 More than 33 Ω : ±200	-55 to +155
ERJT08 (1206)	0.33	200	400	±5	1 to 1 M (E24)	Less than 10 Ω : -100 to +600 More than 10 Ω : ±200	-55 to +155
ERJT14 (1210)	0.50	200	400	±5	1 to 1 M (E24)	Less than 10 Ω : -100 to +600 More than 10 Ω : ±200	-55 to +155

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times \text{Power Rating}$  or max. Overload Voltage listed above whichever less.


### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

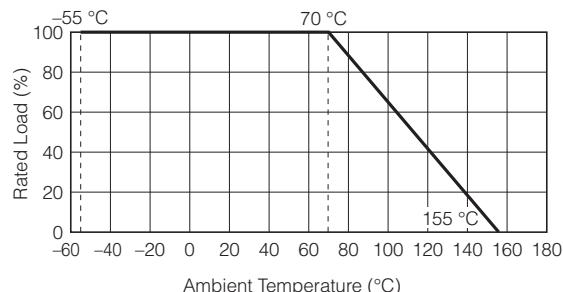


### Limiting Power Curve


- In rush pulse Characteristic

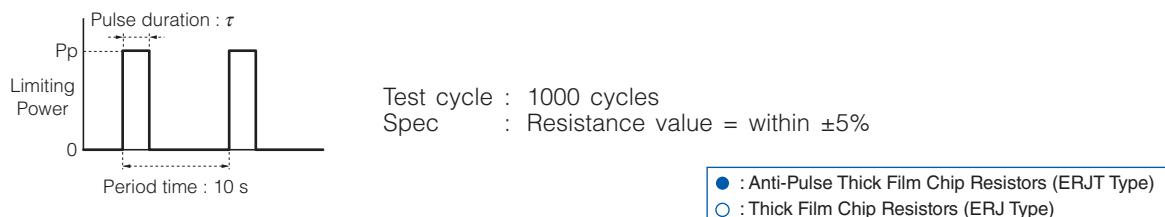


- ERJT06 (0805 inch/2012 mm size)

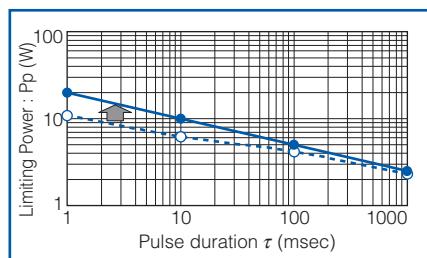

- ERJT08 (1206 inch/3216 mm size)

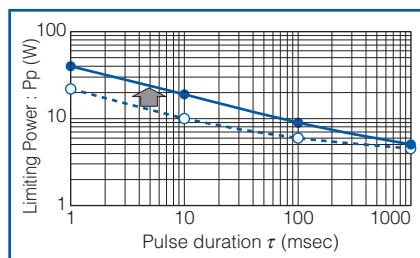

- ERJT14 (1210 inch/3225 mm size)

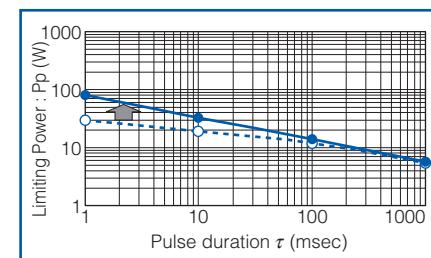

## Anti-Sulfurated Thick Film Chip Resistors



Type: **ERJ S02, S03, S06, S08, S14, S12, S1D, S1T**  
**(Au-based inner electrode type)**

Type: **ERJ U01, U02, U03, U06, U08, U14, U12, U1D, U1T, U6S, U6Q**  
**(Ag-Pd-based inner electrode type)**

### Features

- High resistance to sulfurization achieved by adopting an Au-based inner electrode (ERJS type) and Ag-Pd-based inner electrode (ERJU type)
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Suitable for both reflow and flow soldering
- Low Resistance type...ERJU6S, U6Q : 0.1 Ω to 1.0 Ω
- Reference Standard...IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified (Exemption ERJU01)
- RoHS compliant

### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files

### Explanation of Part Numbers

- ERJS0, S1, U0, U1 Type

1	2	3	4	5	6	7	8	9	10	11	12						
E	R	J	S	0	6	F	1	0	0	2	V						
Product Code										Packaging Methods							
Thick Film Chip Resistors										Code	Packaging						
Size, Power Rating										Code	Part No.						
Code	Inch	Power R.	Code	Inch	Power R.	Resistance Tolerance											
U01	0201	0.05 W	S14 U14	1210	0.5 W	F	± 1 %	Resistance Value									
S02 U02	0402	0.1 W	S12 U12	1812	0.75 W	J	± 5 %	The first two or three digits are significant figures of resistance and the third or 4th one denotes number of zeros following. Jumper is expressed by R00.									
S03 U03	0603	0.1 W	S1D U1D	2010	0.75 W	0	Jumper	Three digit type (±5%), four digit type (±1%) Example: 222→2.2 kΩ, 1002→10 kΩ									
S06 U06	0805	0.125 W	S1T U1T	2512	1 W	Resistance Value											
S08 U08	1206	0.25 W				Packaging Methods											


- ERJU6S, U6Q Type

1	2	3	4	5	6	7	8	9	10	11						
E	R	J	U	6	S	J	R	2	0	V						
Product Code										Packaging Methods						
Thick Film Chip Resistors										Code	Packaging					
Size, Power Rating										Code	Part No.					
Code	Inch	Power R.	Code	Res. Value	Code	Tolerance	Resistance Value									
U6	0805	0.25 W	S	0.1 Ω to 0.2 Ω	F	± 1 %	Shown by 3 digits or letters. (Example) R20 : 0.20 Ω=200 mΩ 1R0 : 1.00 Ω=1000 mΩ									
Resistance Value										Resistance Value						
Code										Code	Packaging					
Resistance Tolerance										Code	Part No.					
Code										V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.					
Resistance Value										ERJU6S ERJU6Q						


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

07 Jan. 2015

## Construction

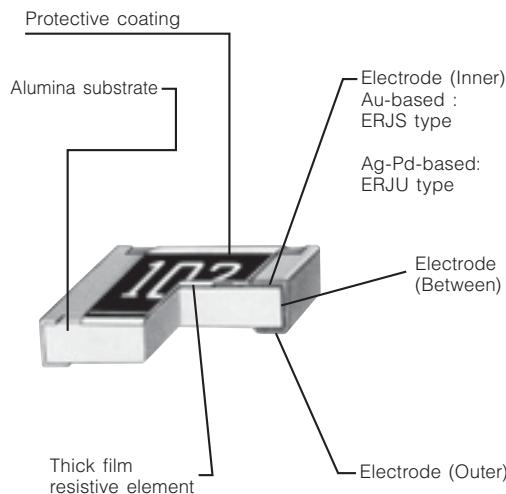

## Dimensions in mm (not to scale)

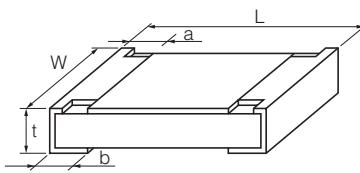

Part No. (inch size)	Dimensions (mm)				Mass (Weight) [g/1000 pcs.]
	L	W	a	b	
ERJU01 (0201)	0.60 <sup>±0.03</sup>	0.30 <sup>±0.03</sup>	0.10 <sup>±0.05</sup>	0.15 <sup>±0.05</sup>	0.23 <sup>±0.03</sup>
ERJS02 (0402) ERJU02 (0402)	1.00 <sup>±0.05</sup>	0.50 <sup>±0.05</sup>	0.20 <sup>±0.10</sup>	0.25 <sup>±0.10</sup>	0.35 <sup>±0.05</sup>
ERJS03 (0603) ERJU03 (0603)	1.60 <sup>±0.15</sup>	0.80 <sup>±0.15</sup>	0.30 <sup>±0.20</sup>	0.30 <sup>±0.15</sup>	0.45 <sup>±0.10</sup>
ERJS06 (0805) ERJU06 (0805)	2.00 <sup>±0.20</sup>	1.25 <sup>±0.10</sup>	0.40 <sup>±0.20</sup>	0.40 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>
ERJU6 (0805)	2.00 <sup>±0.20</sup>	1.25 <sup>±0.10</sup>	0.45 <sup>±0.20</sup>	0.45 <sup>±0.20</sup>	0.55 <sup>±0.10</sup>
ERJS08 (1206) ERJU08 (1206)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.15</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>
ERJS14 (1210) ERJU14 (1210)	3.20 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>
ERJS12 (1812) ERJU12 (1812)	4.50 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.50 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>
ERJS1D (2010) ERJU1D (2010)	5.00 <sup>±0.20</sup>	2.50 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>
ERJS1T (2512) ERJU1T (2512)	6.40 <sup>±0.20</sup>	3.20 <sup>±0.20</sup>	0.65 <sup>±0.20</sup>	0.60 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>

## Ratings

Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJU01 (0201)	0.05	25	50	±1	10 to 1 M (E24, E96)	$\pm 200 (\pm 5\%)$	-55 to +125
				±5	1 to 1 M (E24)		
ERJS02 ERJU02 (0402)	0.1	50	100	±1	10 to 1 M (E24, E96)	$\pm 100 (\pm 1\%)^*$	-55 to +155
				±5	1 to 3.3 M (E24)		
ERJS03 ERJU03 (0603)	0.1	75	150	±1	10 to 1 M (E24, E96)	10 Ω to 1 MΩ: ±200 (±5%)	-55 to +155
				±5	1 to 10 M (E24)		
ERJS06 ERJU06 (0805)	0.125	150	200	±1	10 to 1 M (E24, E96)	1 MΩ <: -400 to +150	-55 to +155
				±5	1 to 10 M (E24)		
ERJS08 ERJU08 (1206)	0.25	200	400	±1	10 to 1 M (E24, E96)	*ERJU01, ERJS02, ERJU02 : ±200	-55 to +155
				±5	1 to 10 M (E24)		
ERJS14 ERJU14 (1210)	0.5	200	400	±1	10 to 1 M (E24, E96)	1 MΩ <: -400 to +150	-55 to +155
				±5	1 to 10 M (E24)		
ERJS12 ERJU12 (1812)	0.75	200	500	±1	10 to 1 M (E24, E96)	-55 to +155	-55 to +155
				±5	1 to 10 M (E24)		
ERJS1D ERJU1D (2010)	0.75	200	500	±1	10 to 1 M (E24, E96)	-55 to +155	-55 to +155
				±5	1 to 10 M (E24)		
ERJS1T ERJU1T (2512)	1.0	200	500	±1	10 to 1 M (E24, E96)	-55 to +155	-55 to +155
				±5	1 to 10 M (E24)		

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $\text{RCWV} = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $\text{SOTV} = 2.5 \times \text{Power Rating}$  or max. Overload Voltage listed above whichever less.

## [Low Resistance type]

Part No. (inch size)	Power Rating at 70 °C (W)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range (°C)
ERJU6S (0805)	0.25	±1, ±2, ±5	0.1 to 0.2 (E24)	±150	-55 to +155
ERJU6Q (0805)			0.22 to 1 (E24)		

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.


07 Jan. 2015

[For Jumper]

Part No. (inch size)	Rated Current (A)	Maximum Overload Current (A)
ERJU01 (0201)	0.5	1
ERJS02 ERJU02 (0402)		
ERJS03 ERJU03 (0603)	1	2
ERJS06 ERJU06 (0805)		
ERJS08 ERJU08 (1206)		
ERJS14 ERJU14 (1210)		
ERJS12 ERJU12 (1812)	2	4
ERJS1D ERJU1D (2012)		
ERJS1T ERJU1T (2512)		

Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure below.

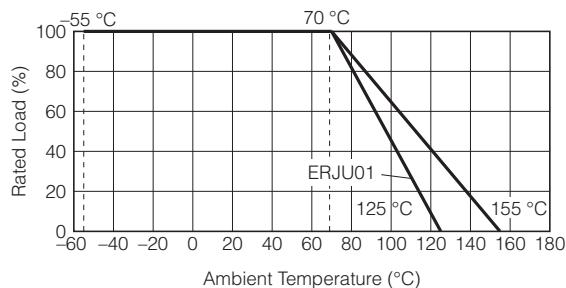

## Anti-Sulfurated High Power Chip Resistors / Wide Terminal Type

ROT

Type: ERJ C1

### Features

- High resistance to sulfurization achieved by adopting Anti-Sulfurated electrode structure and material
- High solder-joint reliability by wide terminal construction
- Excellent heat dissipation characteristics by wide terminal construction
- AEC-Q200 qualified
- RoHS compliant


### Recommended Applications

- Motor control circuit of the industrial equipment
- Automotive electronic circuits including ECUs (Electrical control unit), anti-lock breaking systems and air-bag systems
- Current sensing for power supply circuits in a variety of equipment


### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files


### Explanation of Part Numbers

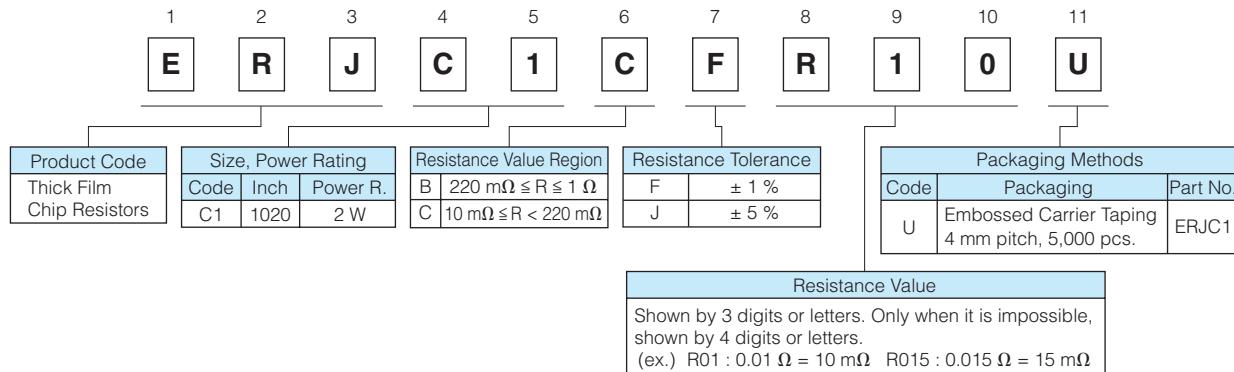

### Construction

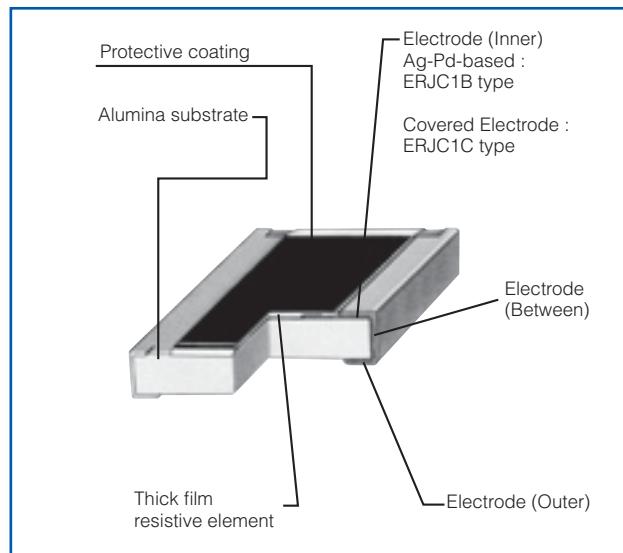

### Dimensions in mm (not to scale)




Part No. (inch size)	Dimensions (mm)					Mass (Weight) [g/1000 pcs.]
	L	W	T	a	b	
ERJC1B (1020)	2.50±0.20	5.00±0.20	0.55±0.20	0.35±0.20	0.90±0.20	27
ERJC1C (1020)				0.60±0.20		

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

04 Sep. 2014

### Circuit Configuration

Type ERJC1




Ratings					
Part No. (inch size)	Power Rating at 70 °C <sup>(1)</sup> (W)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ( $\times 10^{-6}/\text{°C}$ )	Category Temperature Range (°C)
ERJC1 (1020)	2	±1	10 m to 1 (E24)	10 mΩ $\leq R < 22 \text{ mΩ}$ : ±350 22 mΩ $\leq R < 47 \text{ mΩ}$ : ±200 47 mΩ $\leq R < 100 \text{ mΩ}$ : ±150 100 mΩ $\leq R \leq 1 \Omega$ : ±100	-55 to +155
		±5		10 mΩ $\leq R < 22 \text{ mΩ}$ : ±350 22 mΩ $\leq R < 1 \Omega$ : ±200	

(1) Use it on the condition that the case temperature is below 155 °C.


### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

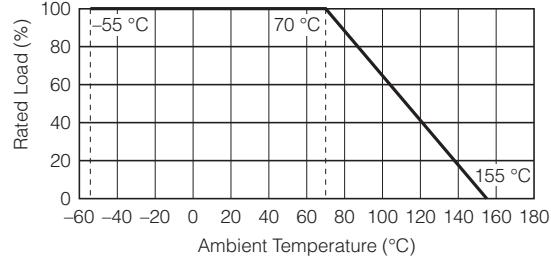

### Chip Resistor Array

Type: **EXB 14V, 18V, 24V, 28V,  
N8V, 2HV, 34V, V4V,  
38V, V8V, S8V**

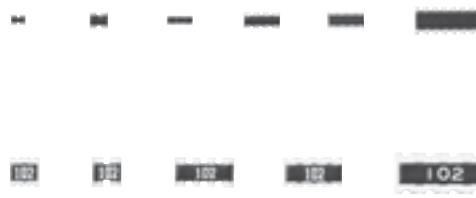

#### Features

- High density
  - 2 resistors in 0.8 mm × 0.6 mm size / 0302 inch size : EXB14V
  - 4 resistors in 1.4 mm × 0.6 mm size / 0502 inch size : EXB18V
  - 2 resistors in 1.0 mm × 1.0 mm size / 0404 inch size : EXB24V
  - 4 resistors in 2.0 mm × 1.0 mm size / 0804 inch size : EXB28V, EXBN8V
  - 8 resistors in 3.8 mm × 1.6 mm size / 1506 inch size : EXB2HV
  - 2 resistors in 1.6 mm × 1.6 mm size / 0606 inch size : EXB34V, EXBV4V
  - 4 resistors in 3.2 mm × 1.6 mm size / 1206 inch size : EXB38V, EXBV8V
  - 4 resistors in 5.1 mm × 2.2 mm size / 2009 inch size : EXBS8V
- Improvement of placement efficiency
  - Placement efficiency of Chip Resistor Array is two, four or eight times of the flat type chip resistor
- Reference Standard...IEC 60115-9, JIS C 5201-9, EIAJ RC-2129
- AEC-Q200 qualified (EXB2, EXB3)
- RoHS compliant


#### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files

#### Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11																																														
<b>E</b>	<b>X</b>	<b>B</b>	<b>V</b>	<b>8</b>	<b>V</b>	<b>4</b>	<b>7</b>	<b>2</b>	<b>J</b>	<b>V</b>																																														
<hr/>																																																								
<b>Product Code</b>		<b>Size and construction</b>																																																						
Thick Film Chip Resistor Networks		<table border="1"> <thead> <tr> <th>Code</th><th>Inch</th><th>Terminal type</th><th>No. of Terminal</th><th>Schematics</th><th>Resistance Value</th><th>Resistance Tolerance</th><th>Packaging Methods</th><th>Code</th><th>Packaging</th><th>Part No.</th></tr> </thead> <tbody> <tr> <td>4</td><td>4 Terminal</td><td>Convex/ Flat Terminal</td><td>4</td><td>V</td><td>The first two digits are significant figures of resistance value and the third one denotes the number of zeros following. Jumper is expressed by R00</td><td>J ±5 %</td><td>Embossed Carrier Taping 4 mm pitch, 2,500 pcs.</td><td>Nil</td><td>Embossed Carrier Taping 4 mm pitch, 2,500 pcs.</td><td>EXBS8V</td></tr> <tr> <td>8</td><td>8 Terminal</td><td></td><td>8</td><td>Isolated type</td><td></td><td>0 Jumper</td><td>Punched Carrier Taping 2 mm pitch, 10,000 pcs.</td><td>X</td><td>Punched Carrier Taping 2 mm pitch, 10,000 pcs.</td><td>EXB14V, 18V, 24V, 28V, N8V</td></tr> <tr> <td>H</td><td>16 Terminal</td><td></td><td></td><td></td><td></td><td></td><td>Punched Carrier Taping 4 mm pitch, 5,000 pcs.</td><td>V</td><td>Punched Carrier Taping 4 mm pitch, 5,000 pcs.</td><td>EXB2HV, 34V, 38V, V4V, V8V</td></tr> </tbody> </table>											Code	Inch	Terminal type	No. of Terminal	Schematics	Resistance Value	Resistance Tolerance	Packaging Methods	Code	Packaging	Part No.	4	4 Terminal	Convex/ Flat Terminal	4	V	The first two digits are significant figures of resistance value and the third one denotes the number of zeros following. Jumper is expressed by R00	J ±5 %	Embossed Carrier Taping 4 mm pitch, 2,500 pcs.	Nil	Embossed Carrier Taping 4 mm pitch, 2,500 pcs.	EXBS8V	8	8 Terminal		8	Isolated type		0 Jumper	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	EXB14V, 18V, 24V, 28V, N8V	H	16 Terminal						Punched Carrier Taping 4 mm pitch, 5,000 pcs.	V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	EXB2HV, 34V, 38V, V4V, V8V
Code	Inch	Terminal type	No. of Terminal	Schematics	Resistance Value	Resistance Tolerance	Packaging Methods	Code	Packaging	Part No.																																														
4	4 Terminal	Convex/ Flat Terminal	4	V	The first two digits are significant figures of resistance value and the third one denotes the number of zeros following. Jumper is expressed by R00	J ±5 %	Embossed Carrier Taping 4 mm pitch, 2,500 pcs.	Nil	Embossed Carrier Taping 4 mm pitch, 2,500 pcs.	EXBS8V																																														
8	8 Terminal		8	Isolated type		0 Jumper	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	EXB14V, 18V, 24V, 28V, N8V																																														
H	16 Terminal						Punched Carrier Taping 4 mm pitch, 5,000 pcs.	V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	EXB2HV, 34V, 38V, V4V, V8V																																														


#### Construction (Example : Concave Terminal)

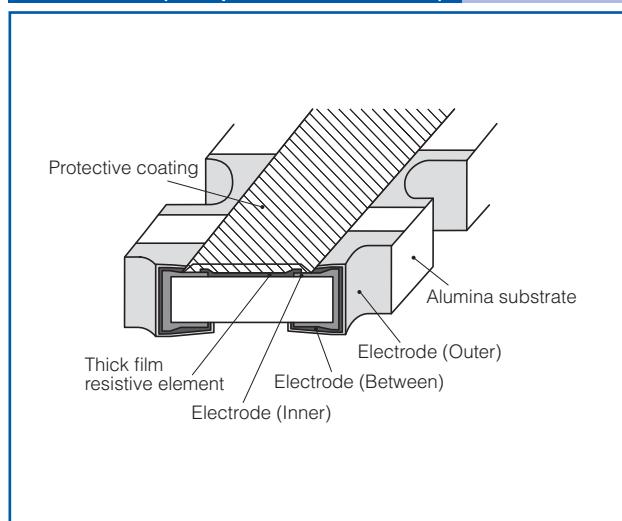


#### Schematics

- Isolated type

14V, 24V, 34V, V4V




18V, 28V, N8V, 38V, V8V, S8V



2HV

8 resistors



### Ratings

Item	Specifications	
Resistance Range	10 Ω to 1 MΩ : E24 series	
Resistance Tolerance	J : ±5 %	
Number of Terminals	14V,24V,V4V,34V 18V,28V,N8V,38V,V8V,S8V 2HV	4 terminal 8 terminal 16 terminal
	14V,24V,V4V,34V 18V,28V,N8V,38V,V8V,S8V 2HV	2 element 4 element 8 element
	14V,N8V 18V 24V,28V,V4V,34V,V8V,38V S8V 2HV	0.031 W/element 0.031 W/element (0.1 W/package) 0.063 W/element 0.1 W/element 0.063 W/element (0.25 W/package)


(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Value}}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times \text{Power Rating}$  or max. Overload Voltage listed above whichever less.

### Power Derating Curve


For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

Item	Specifications		
Limiting Element Voltage <sup>(1)</sup>	14V,18V 2HV 24V,28V,N8V,38V,34V,V4V,V8V S8V		
	14V,18V 2HV 24V,28V,N8V,38V,34V,V4V,V8V S8V		
	14V,18V 2HV 24V,28V,N8V,38V,34V,V4V,V8V S8V		
	14V,18V 2HV 24V,28V,N8V,38V,34V,V4V,V8V S8V		
Maximum Overload Voltage <sup>(2)</sup>	14V,18V 2HV 24V,28V,N8V,38V,34V,V4V,V8V S8V		
	14V,18V 2HV 24V,28V,N8V,38V,34V,V4V,V8V S8V		
	14V,18V 2HV 24V,28V,N8V,38V,34V,V4V,V8V S8V		
	14V,18V 2HV 24V,28V,N8V,38V,34V,V4V,V8V S8V		
T.C.R.	±200 × 10 <sup>-6</sup> / °C		
Category Temperature Range	-55 °C to 125 °C		
Jumper Array	Rated Current	14V,18V 2HV,24V,28V,N8V,38V,34V,V4V,V8V S8V	0.5 A 1 A 2 A
		14V,18V 2HV,24V,28V,N8V,38V,34V,V4V,V8V S8V	1 A 2 A 4 A

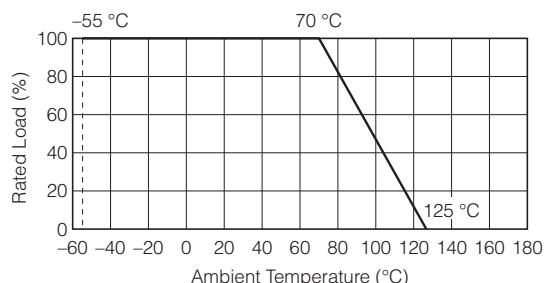

## Dimensions in mm (not to scale)


### (1) Convex Terminal type

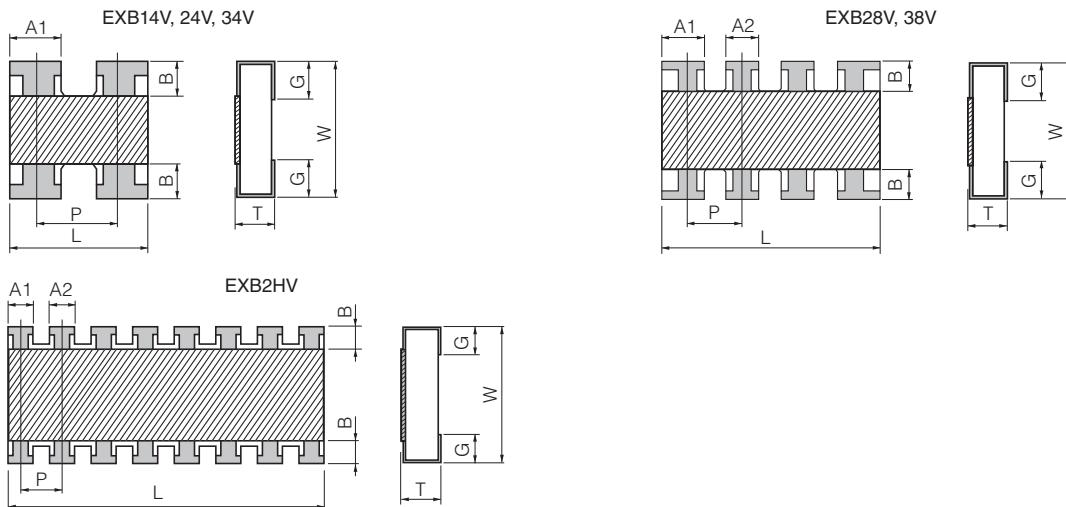

Part No. (inch size)	Dimensions (mm)								Mass (Weight) [g/1000 pcs.]
	L	W	T	A1	A2	B	P	G	
EXB14V (0201×2)	0.80 <sup>±0.10</sup>	0.60 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	—	0.15 <sup>±0.10</sup>	(0.50)	0.15 <sup>±0.10</sup>	0.5
EXB24V (0402×2)	1.00 <sup>±0.10</sup>	1.00 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.40 <sup>±0.10</sup>	—	0.18 <sup>±0.10</sup>	(0.65)	0.25 <sup>±0.10</sup>	1.2
EXB28V (0402×4)	2.00 <sup>±0.10</sup>	1.00 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.45 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.20 <sup>±0.10</sup>	(0.50)	0.25 <sup>±0.10</sup>	2.0
EXB2HV (0402×8)	3.80 <sup>±0.10</sup>	1.60 <sup>±0.10</sup>	0.45 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.30 <sup>±0.10</sup>	(0.50)	0.30 <sup>±0.10</sup>	9.0
EXB34V (0603×2)	1.60 <sup>±0.20</sup>	1.60 <sup>±0.15</sup>	0.50 <sup>±0.10</sup>	0.65 <sup>±0.15</sup>	—	0.30 <sup>±0.20</sup>	(0.80)	0.30 <sup>±0.20</sup>	3.5
EXB38V (0603×4)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.15</sup>	0.50 <sup>±0.10</sup>	0.65 <sup>±0.15</sup>	0.45 <sup>±0.15</sup>	0.30 <sup>±0.20</sup>	(0.80)	0.35 <sup>±0.20</sup>	7.0

( ) Reference

### (2) Concave Terminal type

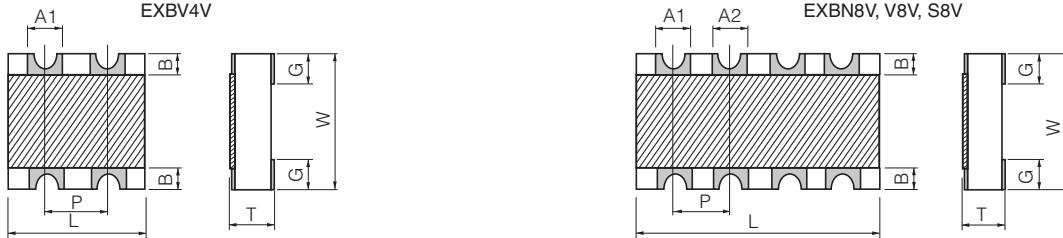

Part No. (inch size)	Dimensions (mm)								Mass (Weight) [g/1000 pcs.]
	L	W	T	A1	A2	B	P	G	
EXBN8V (0402×4)	2.00 <sup>±0.10</sup>	1.00 <sup>±0.10</sup>	0.45 <sup>±0.10</sup>	0.30 <sup>±0.10</sup>	0.30 <sup>±0.10</sup>	0.20 <sup>±0.15</sup>	(0.50)	0.30 <sup>±0.15</sup>	3.0
EXBV4V (0603×2)	1.60 <sup>±0.20</sup>	1.60 <sup>±0.20</sup>	0.60 <sup>±0.10</sup>	0.60 <sup>±0.10</sup>	—	0.30 <sup>±0.15</sup>	(0.80)	0.45 <sup>±0.15</sup>	5.0
EXBV8V (0603×4)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.10</sup>	0.60 <sup>±0.10</sup>	0.60 <sup>±0.10</sup>	0.60 <sup>±0.10</sup>	0.30 <sup>±0.15</sup>	(0.80)	0.45 <sup>±0.15</sup>	10
EXBS8V (0805×4)	5.08 <sup>±0.20</sup>	2.20 <sup>±0.20</sup>	0.70 <sup>±0.20</sup>	0.80 <sup>±0.15</sup>	0.80 <sup>±0.15</sup>	0.50 <sup>±0.15</sup>	(1.27)	0.55 <sup>±0.15</sup>	30

( ) Reference

### (3) Flat Terminal type

Part No. (inch size)	Dimensions (mm)								Mass (Weight) [g/1000 pcs.]
	L	W	T	A1	A2	B	P	G	
EXB18V (0201×4)	1.40 <sup>±0.10</sup>	0.60 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.20 <sup>±0.10</sup>	0.20 <sup>±0.10</sup>	0.10 <sup>±0.10</sup>	(0.40)	0.20 <sup>±0.10</sup>	1.0

( ) Reference

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

03 Sep. 2014

### Metal Film Chip Resistor Array

Type: **ERA38V**




#### Features

- High accuracy ..... Small resistance tolerance and Temperature Coefficient of Resistance (T.C.R.)
- High reliability ..... Stable at high temperature and humidity  
(85 °C 85 % RH rated load, Category temperature range : -55 to +155 °C)
- High performance ..... Low current noise, excellent non-linearity
- Customize ..... Different resistance values are available. Please contact us for details.
- AEC-Q200 qualified
- RoHS compliant


#### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files

#### Explanation of Part Numbers

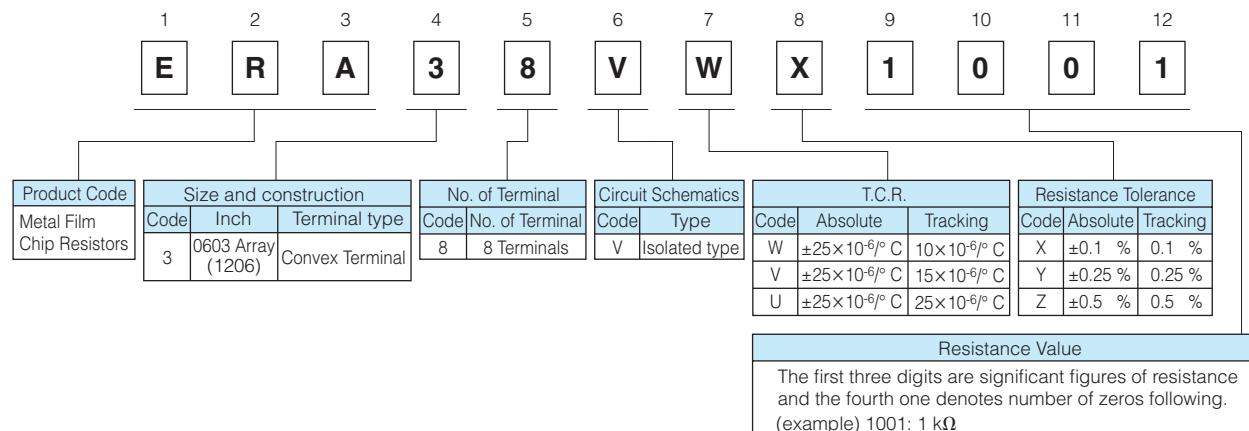


#### Construction

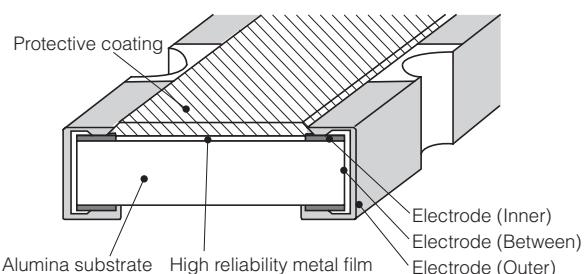


#### Schematics

- Isolated type

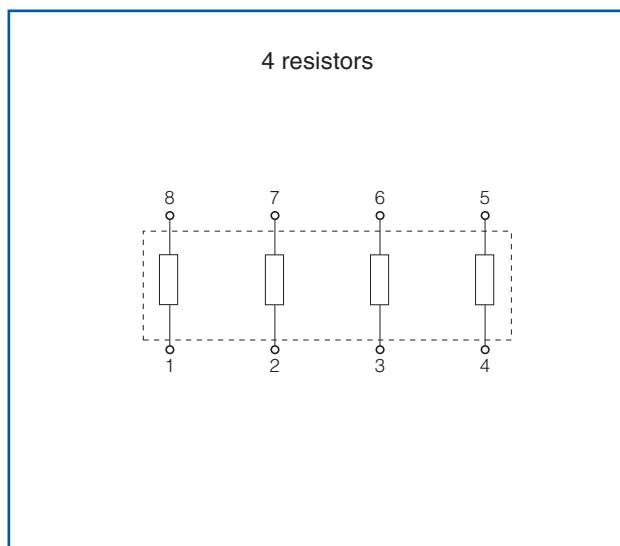

### Dimensions in mm (not to scale)

Convex Terminal type

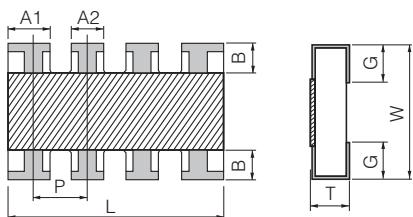

1206 inch size

Dimensions (mm)	L	W	T	A <sub>1</sub>
3.20±0.20	1.60±0.15	0.50±0.10	0.65±0.15	
Dimensions (mm)	A <sub>2</sub>	B	P	G
0.45±0.15	0.30±0.20	(0.80)	0.35±0.20	

Mass (Weight) [g/1000 pcs.] : 7.0 g

( ) Reference

### Ratings

Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	T.C.R. (Absolute) T.C.R. (Tracking) (× 10 <sup>-6</sup> /°C)	Resistance Tolerance (Absolute) Resistance Tolerance (Relative) (%)	Resistance Range <sup>(3)</sup> (Ω)	Category Temperature Range (°C)	
ERA38V (0603×4)	0.063/element	75	150	Absolute : ±25 Tracking : 25 (U)	Absolute : ±0.5 Relative : 0.5 (Z)	100 to 39 k (E24)	-55 to +155	
				Absolute : ±25 Tracking : 15 (V)	Absolute : ±0.25 Relative : 0.25 (Y)	1k to 39 k (E24)		
				Absolute : ±25 Tracking : 10 (W)	Absolute : ±0.1 Relative : 0.1 (X)			


(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{Power\ Rating \times Resistance\ Value}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times Power\ Rating$  or max. Overload Voltage listed above whichever less.

(3) E96 series resistance values are also available. Please contact us for details.

### Power Derating Curve

For resistors operated in ambient temperatures above 85 °C, power rating shall be derated in accordance with the figure on the right.

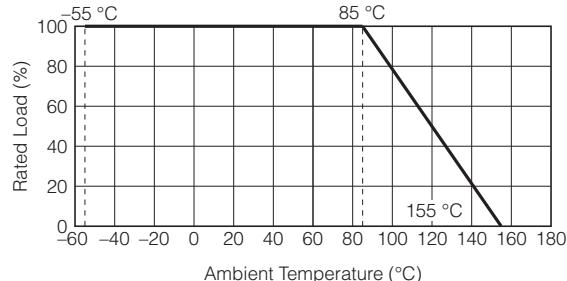

### Anti-Sulfurated Chip Resistor Array



Type: **EXB U24, U28, U2H, U34, U38**

#### Features

- High resistance to sulfurization achieved by adopting an Ag-Pd-based inner electrode
- High density
  - 2 resistors in 1.0 mm × 1.0 mm size / 0404 inch size : EXBU24
  - 4 resistors in 2.0 mm × 1.0 mm size / 0804 inch size : EXBU28
  - 8 resistors in 3.8 mm × 1.6 mm size / 1506 inch size : EXBU2H
  - 2 resistors in 1.6 mm × 1.6 mm size / 0606 inch size : EXBU34
  - 4 resistors in 3.2 mm × 1.6 mm size / 1206 inch size : EXBU38
- Improvement of placement efficiency
  - Placement efficiency of Chip Resistor Array is two, four or eight times of the flat type chip resistor
- Reference Standard...IEC 60115-9, JIS C 5201-9, EIAJ RC-2129
- AEC-Q200 qualified
- RoHS compliant


#### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,

Please see Data Files

#### Explanation of Part Numbers


1	2	3	4	5	6	7	8	9	10	11
<b>E</b>	<b>X</b>	<b>B</b>	<b>U</b>	<b>2</b>	<b>8</b>	<b>4</b>	<b>7</b>	<b>2</b>	<b>J</b>	<b>X</b>
Product Code	Size, Construction Code	No. of Terminal		Resistance Value		Resistance Tolerance			Packaging Methods	
Thick Film Chip Resistor Networks	Inch	4 4 Terminal		The first two digits are significant figures of resistance value and the third one denotes the number of zeros following. Jumper is expressed by R00		J $\pm 5\%$			Code	Packaging
U2 0402 Array		8 8 Terminal		Example : 222 → 2.2 k $\Omega$		0 Jumper			U24, U28	EXBU24, EXBU28
U3 0603 Array		H 16 Terminal							V	EXBU2H, U34, U38
Anti-Sulfurated Convex Terminal										

#### Construction

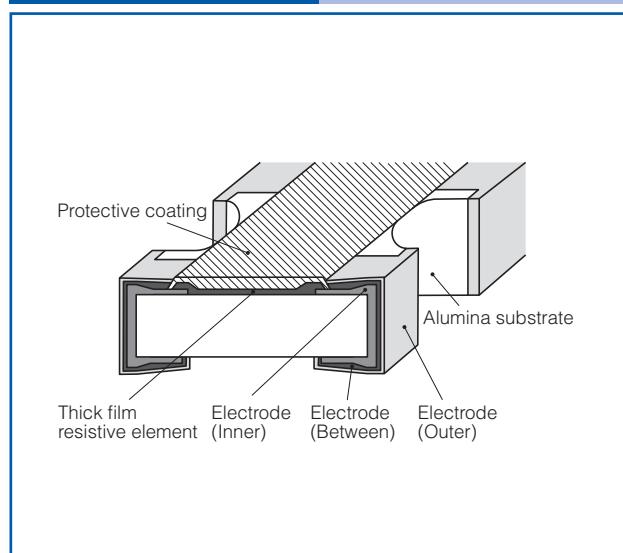

#### Schematics


- Isolated type

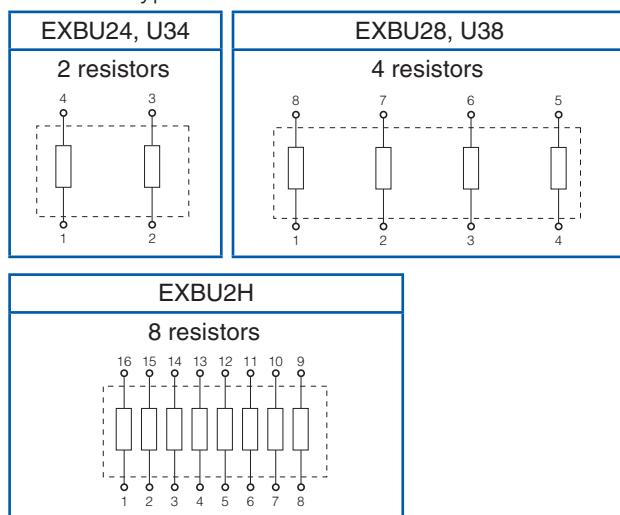

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

03 Sep. 2014

### Dimensions in mm (not to scale)

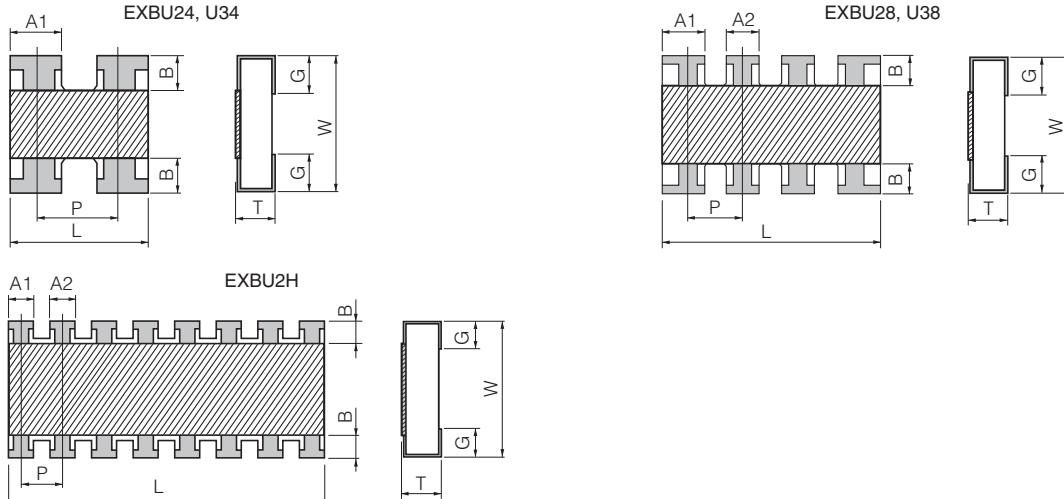

Part No. (inch size)	Dimensions (mm)								Mass (Weight) [g/1000 pcs.]
	L	W	T	A1	A2	B	P	G	
EXBU24 (0402×2)	1.00 <sup>±0.10</sup>	1.00 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.40	—	0.18 <sup>±0.10</sup>	(0.65)	0.25 <sup>±0.10</sup>	1.2
EXBU28 (0402×4)	2.00 <sup>±0.10</sup>	1.00 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.45 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.20 <sup>±0.10</sup>	(0.50)	0.25 <sup>±0.10</sup>	2.0
EXBU2H (0402×8)	3.80 <sup>±0.10</sup>	1.60 <sup>±0.10</sup>	0.45 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.35 <sup>±0.10</sup>	0.30 <sup>±0.10</sup>	(0.50)	0.30 <sup>±0.10</sup>	9.0
EXBU34 (0603×2)	1.60 <sup>±0.20</sup>	1.60 <sup>±0.15</sup>	0.50 <sup>±0.10</sup>	0.65 <sup>±0.15</sup>	—	0.30 <sup>±0.20</sup>	(0.80)	0.30 <sup>±0.20</sup>	3.5
EXBU38 (0603×4)	3.20 <sup>±0.20</sup>	1.60 <sup>±0.15</sup>	0.50 <sup>±0.10</sup>	0.65 <sup>±0.15</sup>	0.45 <sup>±0.15</sup>	0.30 <sup>±0.20</sup>	(0.80)	0.35 <sup>±0.20</sup>	7.0

( ) Reference

### Ratings

Item		Specifications
Resistance Range		10 Ω to 1 MΩ E24 series
Resistance Tolerance		J: ±5 %
Number of Terminals	U24, U34	4 terminal
	U28, U38	8 terminal
	U2H	16 element
Number of Resistors	U24, U34	2 element
	U28, U38	4 element
	U2H	8 element
Power Rating at 70 °C	U24, U28, U34, U38	0.063 W/element
	U2H	0.063 W/element (0.25 W/package)


Item		Specifications
Limiting Element Voltage <sup>(1)</sup>	U2H	25 V
	U24, U28, U34, U38	50 V
Max. Overload Voltage <sup>(2)</sup>	U2H	50 V
	U24, U28, U34, U38	100 V
T.C.R.		±200×10 <sup>-6</sup> /°C
Category Temperature Range		-55 °C to 125 °C
Jumper Array	Rated Current	U24, U28, U2H, U34, U38
	Max. Overload Current	U24, U28, U2H, U34, U38

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Value}}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times \text{Power Rating}$  or max. Overload Voltage listed above whichever less.

### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

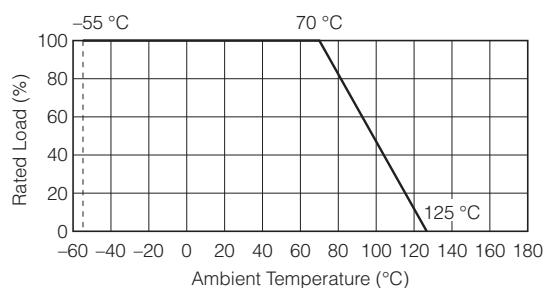


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

03 Sep. 2014

### Chip Resistor Networks

Type: **EXBD**  
**EXBE**  
**EXBA**  
**EXBQ**




#### Features


- High density placing for digital signal circuits
  - Bussed 8 or 15 resistors for pull up/down circuits
    - EXBD: 3.2 mm × 1.6 mm × 0.55 mm, 0.635 mm pitch
    - EXBE: 4.0 mm × 2.1 mm × 0.55 mm, 0.8 mm pitch
    - EXBA: 6.4 mm × 3.1 mm × 0.55 mm, 1.27 mm pitch
    - EXBQ: 3.8 mm × 1.6 mm × 0.45 mm, 0.5 mm pitch
  - Available direct placing on the bus line by means of half pitch spacing without through-holes on PWB ("High density placing" is shown below)
- High speed mounting using conventional placing machine
- Reference Standard...IEC 60115-9, JIS C 5201-9, EIAJ RC-2130
- RoHS compliant

#### [High density placing]

Pull up resistors

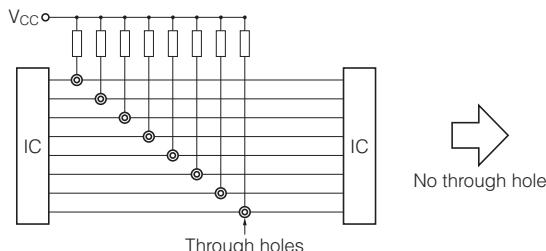

Direct placement on the bus line

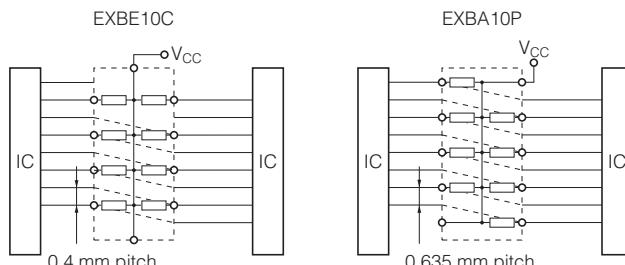

#### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions, Please see Data Files


#### Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	X	B	E	1	0	C	1	0	3	J	
Product Code	Dimension Code of Chip Resistor Network		Circuit Configuration		Resistance Value		Resistance Tolerance	Suffix for Special Requirements			
Thick Film Resistor Network	Code Inch Dimensions		Code Common Terminal Position		The first two digits are significant figures of resistance value and the third one denotes the number of zeros following.		J ±5 %				
D 1206 3.2 mm×1.6 mm			C Center common circuit (EXBD, EXBE)								
E 1608 4.0 mm×2.1 mm			P Diagonal common circuit (Terminal 5 and Terminal 10) (EXBA)								
A 2512 6.4 mm×3.1 mm			P One side common circuit (Terminal 16) (EXBQ)								
Q 1506 3.8 mm×1.6 mm			E Diagonal common circuit (Terminal 1 and Terminal 6) (EXBA)								
	Number of Terminals										
	10(EXBD,E,A)										
	16(EXBQ)										





Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
 Should a safety concern arise regarding this product, please be sure to contact us immediately.

02 Sep. 2014




## Construction (Example : EXBD)

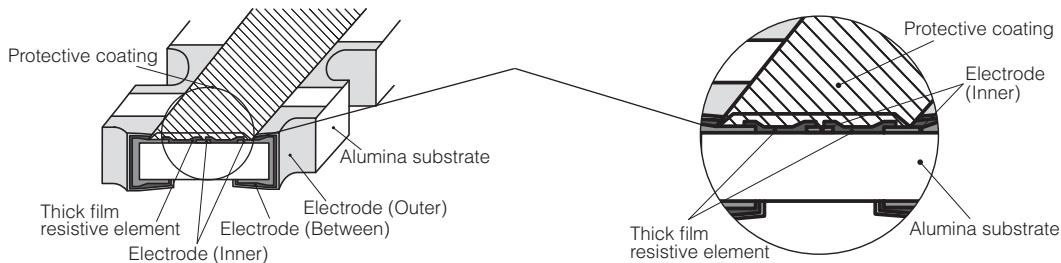

## Dimensions in mm (not to scale)

EXBD	EXBE	EXBA	EXBQ
 Mass (Weight)[1000 pcs.] : 10 g	 Mass (Weight)[1000 pcs.] : 16 g	 Mass (Weight)[1000 pcs.] : 40 g	 Mass (Weight)[1000 pcs.] : 9 g

## Circuit Configuration

EXBD, EXBE	EXBA	EXBQ
		

## Ratings


Item	Specifications			
Series	EXBD	EXBE	EXBA	EXBQ
Resistance Range	47 Ω to 1 MΩ (E12)			100 Ω to 470 kΩ (E6 series)
Resistance Tolerance	±5%			
Number of Terminals	10 terminals			16 terminals
Number of Resistors	8 element			15 element
Power Rating at 70 °C	0.05 W/element	0.063 W/element		0.025 W/element
Limiting Element Voltage <sup>(1)</sup>	25V	50 V		25V
Maximum Overload Voltage <sup>(2)</sup>	50 V	100 V		50 V
T. C. R.	±200 × 10 <sup>-6</sup> / °C			
Category Temperature Range	-55 °C to +125 °C			

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Value}}$ , or Limiting Element Voltage listed above, whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times RCWV^*$  or Maximum Overload Voltage listed above whichever less.

## Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

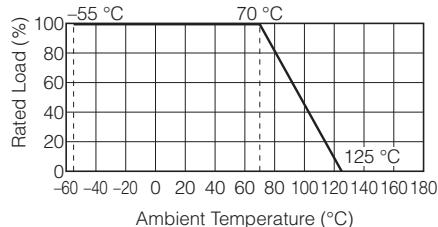

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### Chip Attenuator

Type: **EXB 14AT**  
**EXB 24AT**



#### Features

- Unbalanced  $\pi$  type attenuator circuit in one chip  
EXB14AT (0.8 mm × 0.6 mm), EXB24AT (1.0 mm × 1.0 mm)
- Reduced mounting area :  
EXB14AT : About 60 % smaller than the area of an attenuator circuit consisting of three 0603 chip resistors, almost equal to the area of three 0402 chip resistors  
EXB24AT : About 50 % smaller than the area of an attenuator circuit consisting of three 1005 chip resistors, almost equal to the area of three 0603 chip resistors
- Mounting cost reduction : (Only 1 chip placed as compared to 3)
- Attenuation : 1 dB to 10 dB
- RoHS compliant

#### Recommended Applications

- Attenuation / level control / impedance matching of high frequency  
(communication signalling equipment cellular phones(GSM, CDMA, PDC, etc.), PHS, PDAs)

#### ■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,


Please see Data Files

#### Explanation of Part Numbers


1	2	3	4	5	6	7	8	9	10	11	12
E	X	B	1	4	A	T	3	A	R	3	X
Product Code	Code	Dimensions and Circuit Configuration		Attenuation Value				Tolerance			Packaging
Thick Film Resistor Network	14AT	0.8 mm × 0.6 mm (inch size : 0302) $\pi$ type attenuator		One-digit number /one letter shows attenuation value (ex.) 1→1 dB, A→10 dB				R3 ±0.3 dB			X Punched Carrier Taping 2 mm pitch, 10,000 pcs.
	24AT	1.0 mm × 1.0 mm (inch size : 0404) $\pi$ type attenuator						R5 ±0.5 dB			
								Characteristics Impedance			
								A 50 Ω			

#### Attenuation-Frequency Characteristics

(EXB14AT, EXB24AT)

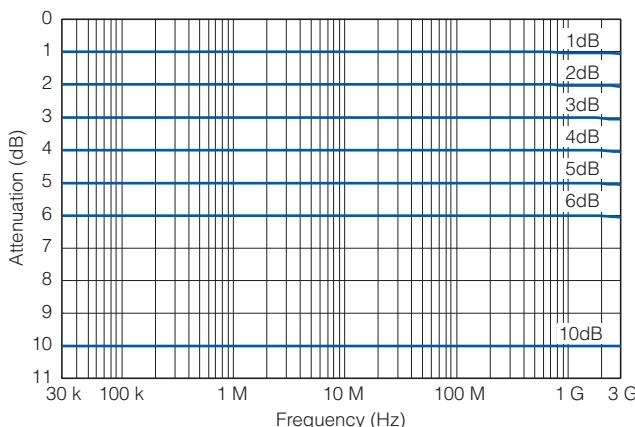


#### Circuit Configuration

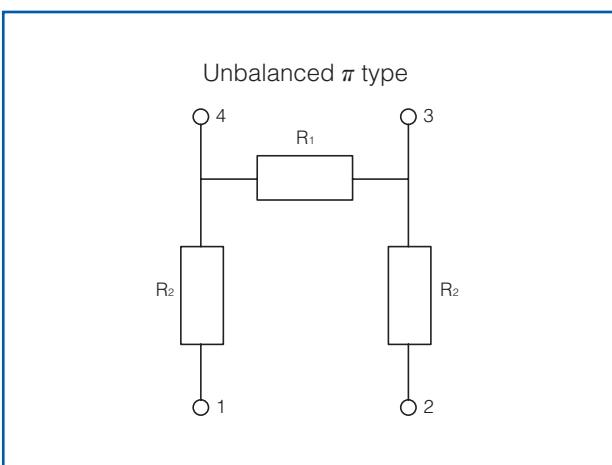


## Construction

EXB14AT

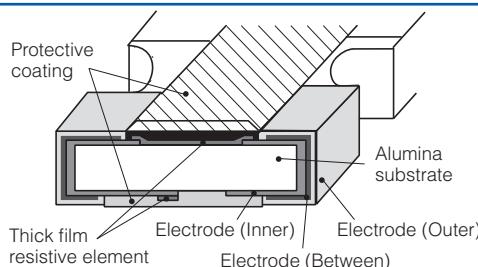


EXB24AT

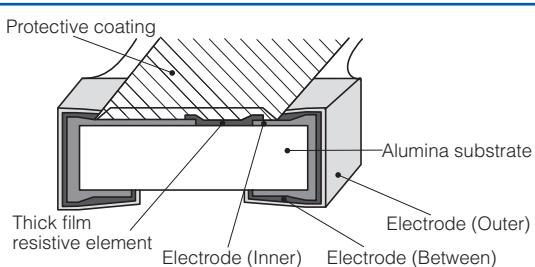


## Dimensions in mm (not to scale)

EXB14AT

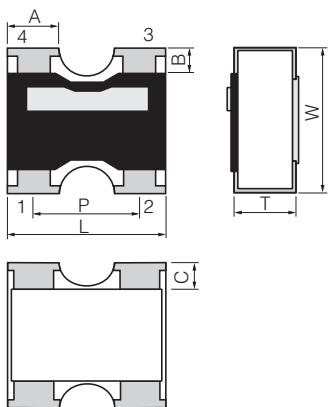

<Marking Configuration>  
The bar marking for recognizing terminal direction is located on the side of terminal 3, 4.  
Mass (Weight) [1000 pcs.] : 0.7 g

EXB24AT

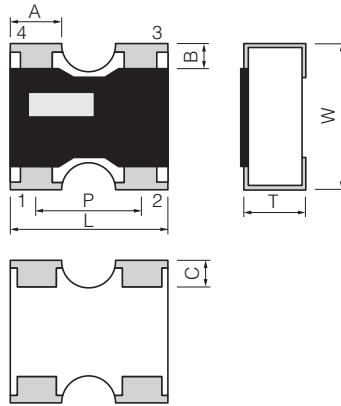

<Marking Configuration>  
The bar marking for recognizing terminal direction is located on the side of terminal 4.  
Mass (Weight) [1000 pcs.] : 1.1 g


## Ratings

Part No.	EXB14AT, EXB24AT
Attenuation Value	1 dB, 2 dB, 3 dB, 4 dB, 5 dB, 6 dB, 10 dB*
Attenuation Value Tolerance	1 dB, 2 dB, 3 dB, 4 dB, 5 dB : $\pm 0.3$ dB 6 dB, 10 dB : $\pm 0.5$ dB
Characteristic Impedance	50 $\Omega$
Power Rating	0.04 W /package
Frequency Range at 70 °C	DC to 3.0 GHz
VSWR (Voltage Standing Wave Ratio)	1.3 max.
Number of Resistors	3 resistors
Number of Terminals	4 terminals
Category Temperature Range	-55 °C to +125 °C

\* Please inquire about the other Attenuator value

## Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

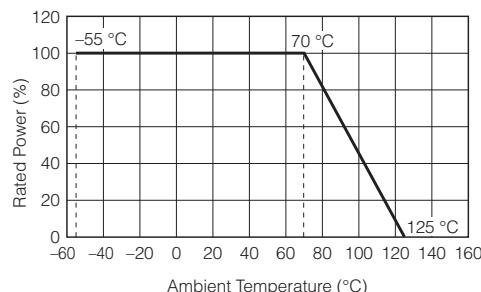

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

02 Sep. 2014


Surface Mount Resistors Series			Packaging (Standard Quantity : pcs./reel)			
Products	Part No.	Size mm (inch)	Pressed Carrier Taping (2 mm pitch)	Punched Carrier Taping (2 mm pitch)	Punched Carrier Taping (4 mm pitch)	Embossed Carrier Taping (4 mm pitch)
Thick Film Chip Resistors	ERJXGN	0402(01005)	20,000 *	—	—	4,0000 **
	ERJ1GN	0603(0201)	15,000	—	—	—
	ERJ2GE	1005(0402)	—	10,000, 20,000	—	—
	ERJ3GE	1608(0603)	—	—	5,000	—
	ERJ6GE	2012(0805)	—	—	5,000	—
	ERJ8GE	3216(1206)	—	—	5,000	—
	ERJ14	3225(1210)	—	—	—	5,000
	ERJ12	4532(1812)	—	—	—	5,000
	ERJ12Z	5025(2010)	—	—	—	5,000
	ERJ1T	6432(2512)	—	—	—	4,000
Precision Thick Film Chip Resistors	ERJXGN	0402(01005)	20,000	—	—	—
	ERJ1GN/1RH	0603(0201)	15,000	—	—	—
	ERJ2RH/2RK	1005(0402)	—	10,000	—	—
	ERJ3RB/3RE/3EK	1608(0603)	—	—	5,000	—
	ERJ6RB/6RE/6EN	2012(0805)	—	—	5,000	—
	ERJ8EN	3216(1206)	—	—	5,000	—
	ERJ14N	3225(1210)	—	—	—	5,000
	ERJ12N	4532(1812)	—	—	—	5,000
	ERJ12S	5025(2010)	—	—	—	5,000
Metal Film Chip Resistors, High Reliability Type	ERA1A	0603(0201)	15,000	—	—	—
	ERA2A	1005(0402)	—	10,000	—	—
	ERA3A	1608(0603)	—	—	5,000	—
	ERA6A	2012(0805)	—	—	5,000	—
	ERA8A	3216(1206)	—	—	5,000	—
Thick Film Chip Resistors/ Low Resistance Type	ERJ2LW/2BW	1005(0402)	10,000	—	—	—
	ERJ2BS/2BQ	1005(0402)	—	10,000	—	—
	ERJ3L/3B/3R/L03	1608(0603)	—	—	5,000	—
	ERJ6B/6R/L06	2012(0805)	—	—	5,000	—
	ERJ8B/8R/8C/L08	3216(1206)	—	—	5,000	—
	ERJ14B/14R/L14	3225(1210)	—	—	—	5,000
	ERJ12R/L12	4532(1812)	—	—	—	5,000
	ERJ12Z/L1D	5025(2010)	—	—	—	5,000
	ERJ1TR	6432(2512)	—	—	—	4,000
	ERJL1W	6432(2512)	—	—	—	3,000
Current Sensing Resistors, Metal Plate Type	ERJMS4	6432(2512)	—	—	—	2,000
	ERJMS6	6468(2526)	—	—	—	1,000 (8 mm Pitch)
	ERJM1W	6432(2512)	—	—	—	3,000
High Power Chip Resistors/ Wide Terminal Type	ERJA1	3264(1225)	—	—	—	4,000
	ERJB1/ERJC1 <sup>(1)</sup>	2550(1020)	—	—	—	5,000
	ERJB2	1632(0612)	—	—	5,000	—
	ERJB3	1220(0508)	—	—	5,000	—

\* W8P2 : Width 8 mm, Pitch 2 mm, \*\* W4P1 : Width 4 mm, Pitch 1 mm

(1) Anti-Sulfurated High Power Chip Resistors / Wide Terminal Type

Surface Mount Resistors Series			Packaging (Standard Quantity : pcs./reel)			
Products	Part No.	Size mm (inch)	Pressed Carrier Taping (2 mm pitch)	Punched Carrier Taping (2 mm pitch)	Punched Carrier Taping (4 mm pitch)	Embossed Carrier Taping (4 mm pitch)
Anti-Surge Thick Film Chip Resistors	ERJP03/PA3	1608(0603)	—	—	5,000	—
	ERJP06	2012(0805)	—	—	5,000	—
	ERJP08	3216(1206)	—	—	5,000	—
	ERJP14	3225(1210)	—	—	—	5,000
Anti-Pulse Thick Film Chip Resistors	ERJT06	2012(0805)	—	—	5,000	—
	ERJT08	3216(1206)	—	—	5,000	—
	ERJT14	3225(1210)	—	—	—	5,000
Anti-Sulfurated Thick Film Chip Resistors	ERJU01	0603(0201)	15,000	—	—	—
	ERJS02/U02	1005(0402)	—	10,000	—	—
	ERJS03/U03	1608(0603)	—	—	5,000	—
	ERJS06/U06 ERJU6S/U6Q	2012(0805)	—	—	5,000	—
	ERJS08/U08	3216(1206)	—	—	5,000	—
	ERJS14/U14	3225(1210)	—	—	—	5,000
	ERJS12/U12	4532(1812)	—	—	—	5,000
	ERJS1D/U1D	5025(2010)	—	—	—	5,000
Chip Resistor Array	ERJS1T/U1T	6432(2512)	—	—	—	4,000
	EXB14V	0806(0302)	—	10,000	—	—
	EXB24V	1010(0404)	—	10,000	—	—
	EXB34V	1616(0606)	—	—	5,000	—
	EXBV4V	1616(0606)	—	—	5,000	—
	EXB18V	1406(0502)	—	10,000	—	—
	EXB28V	2010(0804)	—	10,000	—	—
	EXBN8V	2010(0804)	—	10,000	—	—
	EXB38V	3216(1206)	—	—	5,000	—
	EXBV8V	3216(1206)	—	—	5,000	—
Metal Film Chip Resistor Array	EXBS8V	5022(2009)	—	—	—	2,500
	EXB2HV	3816(1506)	—	—	5,000	—
Anti-Sulfurated Chip Resistor Array	ERA38V	3216(1206)	—	—	5,000	—
Anti-Sulfurated Chip Resistor Array	EXBU24	1010(0404)	—	10,000	—	—
	EXBU34	1616(0606)	—	—	5,000	—
	EXBU28	2010(0804)	—	10,000	—	—
	EXBU38	3216(1206)	—	—	5,000	—
	EXBU2H	3816(1506)	—	—	5,000	—
Chip Resistor Networks	EXBD	3216(1206)	—	—	5,000	—
	EXBE	4021(1608)	—	—	—	4,000
	EXBA	6431(2512)	—	—	—	4,000
	EXBQ	3816(1506)	—	—	5,000	—
Chip Attenuator	EXB14AT	0806(0302)	—	10,000	—	—
	EXB24AT	1010(0404)	—	10,000	—	—

### Carrier Tape

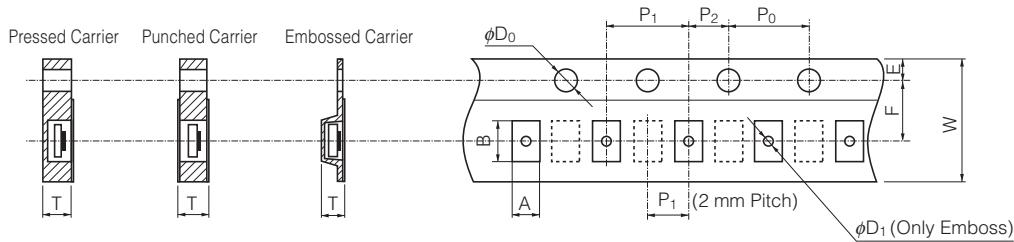

### Pressed Carrier Taping (2 mm Pitch)

- Rectangular Type

(Unit : mm)

Part No.	Size mm (inch)	A	B	W	F	E	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	T
ERJXGN	0402(01005)	0.24 <sup>±0.03</sup>	0.45 <sup>±0.03</sup>								0.31 <sup>±0.05</sup>
ERJ1GN ERJ1R□ ERJU01 ERA1A	0603 (0201)	0.38 <sup>±0.05</sup>	0.68 <sup>±0.05</sup>	8.00 <sup>±0.20</sup>	3.50 <sup>±0.05</sup>	1.75 <sup>±0.10</sup>	2.00 <sup>±0.10</sup>	2.00 <sup>±0.05</sup>	4.00 <sup>±0.10</sup>	1.50 <sup>±0.10</sup>	0.42 <sup>±0.05</sup>
ERJ2LW	1005(0402)	0.68 <sup>±0.10</sup>	1.20 <sup>±0.10</sup>								0.60 <sup>±0.05</sup>
ERJ2BW	1005(0402)	0.67 <sup>±0.10</sup>	1.17 <sup>±0.10</sup>								0.61 <sup>±0.05</sup>

### Punched Carrier Taping (2 mm Pitch)

- Rectangular Type

(Unit : mm)

Part No.	Size mm (inch)	A	B	W	F	E	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	T
ERJ2□ ERJS02 ERJU02 ERA2A	1005 (0402)	0.67 <sup>±0.05</sup>	1.17 <sup>±0.05</sup>	8.00 <sup>±0.20</sup>	3.50 <sup>±0.05</sup>	1.75 <sup>±0.10</sup>	2.00 <sup>±0.10</sup>	2.00 <sup>±0.05</sup>	4.00 <sup>±0.10</sup>	1.50 <sup>±0.10</sup>	0.52 <sup>±0.05</sup>

- Chip Resistor Array / Anti-Sulfurated Chip Resistor Array / Chip Attenuator

(Unit : mm)

Part No.	Size mm (inch)	A	B	W	F	E	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	T
EXB14V EXB14AT	0806 (0302)	0.70 <sup>±0.10</sup>	0.95 <sup>±0.05</sup>								
EXB18V	1406(0502)		1.60 <sup>±0.10</sup>								
EXB24V EXBU24 EXB24AT	1010 (0404)		1.20 <sup>±0.10</sup>	8.00 <sup>±0.20</sup>	3.50 <sup>±0.05</sup>	1.75 <sup>±0.10</sup>	2.00 <sup>±0.10</sup>	2.00 <sup>±0.05</sup>	4.00 <sup>±0.10</sup>	1.50 <sup>±0.10</sup>	0.52 <sup>±0.05</sup>
EXB28V EXBU28 EXBN8V	2010 (0804)	1.20 <sup>±0.10</sup>	2.20 <sup>±0.10</sup>								

### Punched Carrier Taping (4 mm Pitch)

- Rectangular Type

(Unit : mm)

Part No.	Size mm (inch)	A	B	W	F	E	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	T
ERJ3□ ERJ3LW(10 mΩ) ERJ3BW ERJ□□3 ERA3A ERJ3LW(5 mΩ)	1608 (0603)	1.10 <sup>±0.10</sup>	1.90 <sup>±0.10</sup>								0.70 <sup>±0.05</sup>
ERJ6□ ERJ□06 ERJU6S, U6Q ERA6A	2012 (0805)	1.65 <sup>±0.15</sup>	2.50 <sup>±0.20</sup>	8.00 <sup>±0.20</sup>	3.50 <sup>±0.05</sup>	1.75 <sup>±0.10</sup>	4.00 <sup>±0.10</sup>	2.00 <sup>±0.05</sup>	4.00 <sup>±0.10</sup>	1.50 <sup>±0.10</sup>	
ERJB3	1220(0508)										0.84 <sup>±0.05</sup>
ERJ6BW	2012(0805)	1.55 <sup>±0.15</sup>	2.30 <sup>±0.20</sup>								
ERJ8□ ERJ□W ERJ□08 ERA8A	3216 (1206)	2.00 <sup>±0.15</sup>	3.60 <sup>±0.20</sup>								
ERJB2	1632(0612)										

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

09 Nov. 2014

- Chip Resistor Array / Metal Film Chip Resistor Array / Anti-Sulfurated Chip Resistor Array / Chip Resistor Networks (Unit : mm)

Part No.	Size mm (inch)	A	B	W	F	E	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	T
EXB34V EXBU34	1616(0606)	1.95 <sup>±0.15</sup>	1.95 <sup>±0.20</sup>	8.00 <sup>±0.20</sup>	3.50 <sup>±0.05</sup>	1.75 <sup>±0.10</sup>	4.00 <sup>±0.10</sup>	2.00 <sup>±0.05</sup>	4.00 <sup>±0.10</sup>	1.50 <sup>±0.10</sup>	0.70 <sup>±0.05</sup>
EXB38V ERA38V EXBU38	3216(1206)		3.60 <sup>±0.20</sup>								
EXB2HV EXBU2H	3816(1506)		4.10 <sup>±0.15</sup>								
EXBV4V	1616(0606)		1.95 <sup>±0.20</sup>								0.84 <sup>±0.05</sup>
EXBV8V	3216(1206)		3.60 <sup>±0.20</sup>								0.84 <sup>±0.10</sup>
EXBD	3216(1206)		2.00 <sup>±0.20</sup>								0.64 <sup>±0.05</sup>
EXBQ	3816(1506)		1.90 <sup>±0.20</sup>								0.64 <sup>±0.05</sup>

### Embossed Carrier Taping (1 mm Pitch)

- Rectangular Type

(Unit : mm)

Part No.	Size mm (inch)	A	B	W	F	E	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	T
ERJXGN	0402(01005)	0.25 <sup>±0.05</sup>	0.45 <sup>±0.05</sup>	4.00 <sup>±0.20</sup>	1.80 <sup>±0.05</sup>	0.90 <sup>±0.10</sup>	1.00 <sup>±0.10</sup>	1.00 <sup>±0.10</sup>	2.00 <sup>±0.10</sup>	0.80 <sup>±0.10</sup>	0.5 max.

### Embossed Carrier Taping (4 mm Pitch)

- Rectangular Type

(Unit : mm)

Part No.	Size mm (inch)	A	B	W	F	E	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	T	φD <sub>1</sub>								
ERJ14□ ERJ□14	3225 (1210)	2.80 <sup>±0.20</sup>	3.50 <sup>±0.20</sup>	8.00 <sup>±0.30</sup>	3.50 <sup>±0.05</sup>	1.75 <sup>±0.10</sup>	4.00 <sup>±0.10</sup>	2.00 <sup>±0.05</sup>	4.00 <sup>±0.10</sup>	1.50 <sup>±0.10</sup>	1.00 <sup>±0.10</sup>	1.5 min.								
ERJ12□ ERJ□12	4532 (1812)	3.50 <sup>±0.20</sup>	4.80 <sup>±0.20</sup>																	
ERJ12Z ERJ12S ERJ□1D	5025 (2010)																			
ERJB1 ERJC1	2550 (1020)																			
ERJ1T□ ERJ□1T	6432 (2512)	3.60 <sup>±0.20</sup>	6.90 <sup>±0.20</sup>																	
ERJL1W			1.60 <sup>±0.10</sup>																	
ERJM1W ERJMS4			1.50 <sup>±0.20</sup>																	
ERJA1	3264(1225)	3.50 <sup>±0.20</sup>	6.80 <sup>±0.20</sup>									1.10 <sup>±0.20</sup>								

- Chip Resistor Array / Chip Resistor Networks

(Unit : mm)

Part No.	Size mm (inch)	A	B	W	F	E	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	T	φD <sub>1</sub>
EXBS8V	5022(2029)	2.80 <sup>±0.20</sup>	5.70 <sup>±0.20</sup>	12.00 <sup>±0.30</sup>	5.50 <sup>±0.20</sup>	1.75 <sup>±0.10</sup>	4.00 <sup>±0.10</sup>	2.00 <sup>±0.05</sup>	4.00 <sup>±0.10</sup>	1.50 <sup>±0.10</sup>	1.6 max.	1.5 min.
EXBE	4021(1608)	2.50 <sup>±0.20</sup>	4.40 <sup>±0.20</sup>									
EXBA	6431(2512)	3.50 <sup>±0.20</sup>	6.80 <sup>±0.20</sup>									1.10 <sup>±0.20</sup>


### Embossed Carrier Taping (8 mm Pitch)

- Rectangular Type

(Unit : mm)


Part No.	Size mm (inch)	A	B	W	F	E	P <sub>1</sub>	P <sub>2</sub>	P <sub>0</sub>	φD <sub>0</sub>	T	φD <sub>1</sub>
ERJMS6	6468(2526)	6.90 <sup>±0.20</sup>	7.50 <sup>±0.20</sup>	12.00 <sup>±0.30</sup>	5.50 <sup>±0.05</sup>	1.75 <sup>±0.10</sup>	8.00 <sup>±0.10</sup>	2.00 <sup>±0.05</sup>	4.00 <sup>±0.10</sup>	1.50 <sup>±0.10</sup>	2.10 <sup>±0.10</sup>	1.5 min.

### Taping Reel

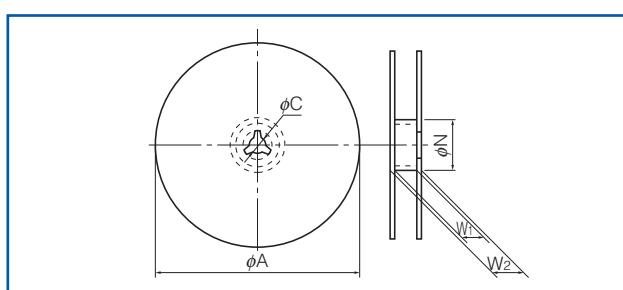

### Recommended Land Pattern

- An example of a land pattern for the Rectangular Type is shown below.

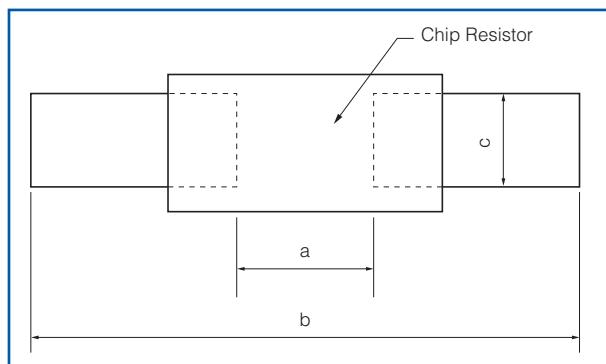


High power (double-sided resistive elements structure) type

Part No.	Size mm/inch	Dimensions (mm)		
		a	b	c
ERJ2LW/2BW	1005/0402	0.52	1.4 to 1.6	0.4 to 0.6
ERJ3LW/3BW	1608/0603	0.5 to 0.8	2.5 to 2.7	0.9 to 1.1
ERJ6BW	2012/0805	0.9	3.2 to 3.8	1.1 to 1.4
ERJ8BW				
ERJ8CW (10 to 16 mΩ)	3216/1206	1.2	4.4 to 5.0	1.3 to 1.8
ERJ8CW (18 to 50 mΩ)	3216/1206	2.0 to 2.6	4.4 to 5.0	1.2 to 1.8

Size mm/inch	Dimensions (mm)		
	a	b	c
0402/01005	0.15 to 0.20	0.5 to 0.7	0.20 to 0.25
0603/0201	0.3 to 0.4	0.8 to 0.9	0.25 to 0.35
1005/0402	0.5 to 0.6	1.4 to 1.6	0.4 to 0.6
1608/0603	0.7 to 0.9	2.0 to 2.2	0.8 to 1.0
2012/0805	1.0 to 1.4	3.2 to 3.8	0.9 to 1.4
3216/1206	2.0 to 2.4	4.4 to 5.0	1.2 to 1.8
3225/1210	2.0 to 2.4	4.4 to 5.0	1.8 to 2.8
4532/1812	3.3 to 3.7	5.7 to 6.5	2.3 to 3.5
5025/2010	3.6 to 4.0	6.2 to 7.0	1.8 to 2.8
6432/2512	5.0 to 5.4	7.6 to 8.6	2.3 to 3.5
6432/2512*	3.6 to 4.0	7.6 to 8.6	2.3 to 3.5

\* ERJL1W


- An example of a land pattern for High Power Chip Resistors / Wide Terminal Type is shown below.




Part No.	Dimensions (mm)		
	a	b	c
ERJA1	6.4	1.70	0.60
ERJB1 ERJC1 <sup>(1)</sup>	5.0	1.30	0.75
ERJB2	3.2	0.95	0.70
ERJB3	2.0	0.80	0.60

(1) Anti-Sulfurated High Power Chip Resistors / Wide Terminal Type

- An example of a land pattern for Chip Resistor Array, Metal Film Chip Resistor Array, Anti-Sulfurated Chip Resistor Array and Chip Attenuator is shown below.




The legend consists of two entries. The first entry shows a white square with a black border and the text 'Conductor' to its right. The second entry shows a square filled with diagonal hatching and the text 'Solder resist' to its right.



Part No.	Dimensions (mm)			
	a	b	c	d
EXB14V EXB14A	0.30	0.30	0.30	0.80 to 0.90
EXB24V EXBU24 EXB24A	0.5	0.35 to 0.40	0.30	1.4 to 1.5







Part No.	Dimensions (mm)				
	a	b	c	f	P
EXB18V	0.20 to 0.30	0.15 to 0.20	0.15 to 0.20	0.80 to 0.90	0.40
EXBV4V,V8V	0.7 to 0.9	0.4 to 0.45	0.4 to 0.45	2 to 2.4	0.80
EXB34V,38V					
EXBU34,U38	0.7 to 0.9	0.4 to 0.5	0.4 to 0.5	2.2 to 2.6	0.80
ERA38V					
EXBS8V	1 to 1.2	0.5 to 0.75	0.5 to 0.75	3.2 to 3.8	1.27



Part No.	Dimensions (mm)				
	a	b	c	d	f
EXB28V	0.40	0.525	0.25	0.25	1.40
EXBU28					
EXBN8V	0.45 to 0.50	0.35 to 0.38	0.25	0.25	1.40 to 2.00

Part No.	Dimensions (mm)				
	a	b	c	d	f
EXB2HV	1.00	0.425	0.25	0.25	2.00
EXBU2H					

- An example of a land pattern for Chip Resistor Networks is shown below.

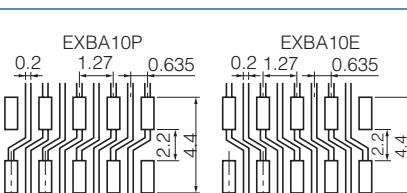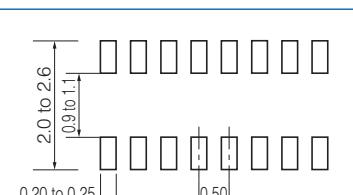	EXBA	EXBE
For popular pattern	Pitch 1.27 mm 	Pitch 0.8 mm 
For high density pattern*	Pitch 0.635 mm Through-hole less 	Pitch 0.4 mm Through-hole less 
	EXBD	EXBQ
For popular pattern	Pitch 0.635 mm 	Pitch 0.5 mm 


\* When designing high density land patterns, examine the reliability of isolation among the lines and adopt the chip resistor networks.

### Recommended Soldering Conditions

Recommendations and precautions are described below.

#### ● Rectangular Type

- Recommended soldering conditions for reflow
  - Reflow soldering shall be performed a maximum of two times.
  - Please contact us for additional information when used in conditions other than those specified.
  - Please measure the temperature of the terminals and study every kind of solder and printed circuit board for solderability before actual use.

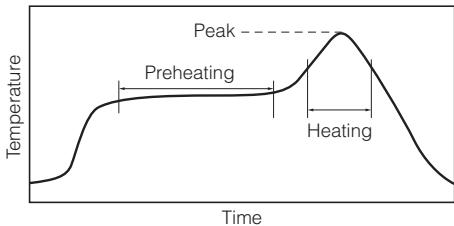

For soldering (Example : Sn/Pb)

	Temperature	Time
Preheating	140 °C to 160 °C	60 s to 120 s
Main heating	Above 200 °C	30 s to 40 s
Peak	235 ± 5 °C	max. 10 s

For lead-free soldering (Example : Sn/Ag/Cu)


	Temperature	Time
Preheating	150 °C to 180 °C	60 s to 120 s
Main heating	Above 230 °C	30 s to 40 s
Peak	max. 260 °C	max. 10 s

- Recommended soldering conditions for flow

	For soldering		For lead-free soldering	
	Temperature	Time	Temperature	Time
Preheating	140 °C to 180 °C	60 s to 120 s	150 °C to 180 °C	60 s to 120 s
Soldering	245 ± 5 °C	20 s to 30 s	max. 260 °C	max. 10 s

#### ● Chip Resistor Array, Chip Resistor Networks and Chip Attenuator

- Recommended soldering conditions for reflow
  - Reflow soldering shall be performed a maximum of two times.
  - Please contact us for additional information when used in conditions other than those specified.
  - Please measure the temperature of the terminals and study every kind of solder and printed circuit board for solderability before actual use.

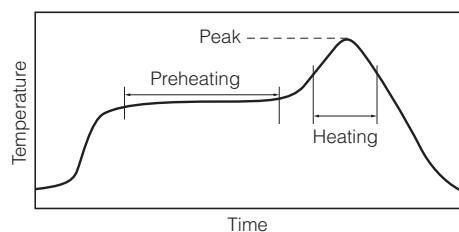

For soldering (Example : Sn/Pb)

	Temperature	Time
Preheating	140 °C to 160 °C	60 s to 120 s
Main heating	Above 200 °C	30 s to 40 s
Peak	235 ± 5 °C	max. 10 s

For lead-free soldering (Example : Sn/Ag/Cu)

	Temperature	Time
Preheating	150 °C to 180 °C	60 s to 120 s
Main heating	Above 230 °C	30 s to 40 s
Peak	max. 260 °C	max. 10 s

- Flow soldering

We do not recommend flow soldering, because a solder bridge may form.  
Please contact us regarding flow soldering of EXBA series.

### ⚠ Safety Precautions (Common precautions for Surface Mount Resistors)

The following are precautions for individual products. Please also refer to the common precautions for Fixed Resistors in this catalog.

1. Take measures against mechanical stress during and after mounting of Surface Mount Resistors (hereafter called the resistors) so as not to damage their electrodes and protective coatings.  
Be careful not to misplace the resistors on the land patterns. Otherwise, solder bridging may occur.
2. Keep the rated power and ambient temperature within the specified derating curve.  
Some circuit boards, wiring patterns, temperatures of heat generated by adjacent components, or ambient temperatures can become factors in the rise of the temperature of the resistors, regardless of the level of power applied. Therefore, check the conditions before use and optimize them so as not to damage the boards and peripheral components.  
Make sure to contact us before using the resistors under special conditions.
3. If a transient load (heavy load in a short time) like a pulse is expected to be applied, check and evaluate the operations of the resistors when installed in your products before use.  
Never exceed the rated power. Otherwise, the performance and/or reliability of the resistors may be impaired.
4. Before using halogen-based or other high-activity flux, check the possible effects of the flux residues on the performance and reliability of the resistors.
5. When soldering with a soldering iron, never touch the resistors' bodies with the tip of the soldering iron. When using a soldering iron with a high temperature tip, finish soldering as quickly as possible (within three seconds at 350 °C max.).
6. As the amount of applied solder becomes larger, the mechanical stress applied to the resistors increases, causing problems such as cracks and faulty characteristics. Avoid applying an excessive amounts of solder.
7. When the resistors' protective coatings are chipped, flawed, or removed, the characteristics of the resistors may be impaired. Take special care not to apply mechanical shock during automatic mounting or cause damage during handling of the boards with the resistors mounted.
8. Do not apply shock to the resistors or pinch them with a hard tool (e.g. pliers and tweezers). Otherwise, the resistors' protective coatings and bodies may be chipped, affecting their performance.
9. Avoid excessive bending of printed circuit boards in order to protect the resistors from abnormal stress.
10. Do not immerse the resistors in solvent for a long time. Before using solvent, carefully check the effects of immersion.
11. Transient voltage  
If there is a possibility that the transient phenomenon (significantly high voltage applied in a short time) may occur or that a high voltage pulse may be applied, make sure to evaluate and check the characteristics of Fixed Metal (Oxide) Film Resistors mounted on your product rather than only depending on the calculated power limit or steady-state conditions to complete the design or decide to use the resistors.
12. Do not apply excessive tension to the terminals.

## Metal (Oxide) Film Resistors

### Type: ERG(X)S (Small size)

(0.5 W, 1 W, 2 W, 3 W, 5 W)

### ERG(X)F (Anti-heat conducting for PCB)

(1 W, 2 W, 3 W, 5 W)




### Features

- Miniaturized  
50 % smaller compared to existing models
- Non-flammable
- High Reliability
- Automatic Insertion
- Reference Standards  
IEC 60115-2, IEC 60115-4, JIS C 5201-4, EIAJ RC-2138
- RoHS compliant

### Explanation of Part Numbers

Ex.1 : ERX type

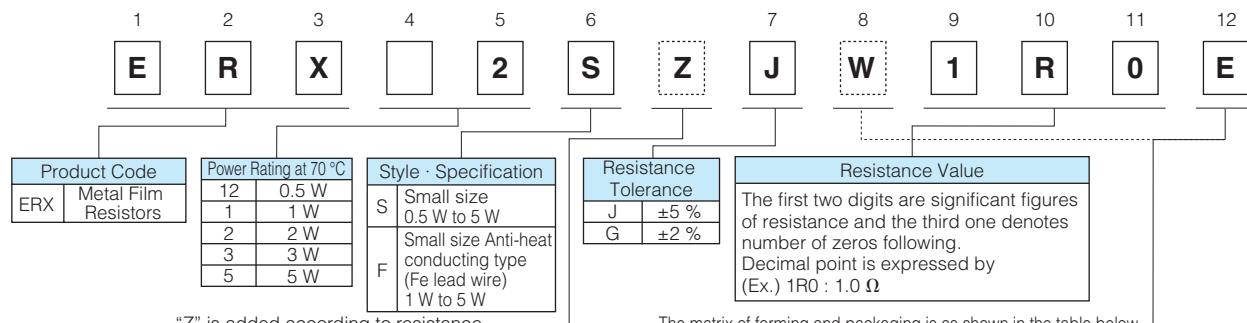

"Z" is added according to resistance.


Part No.	Resistance Tolerance	Resistance Value Range (Ω)
	ERX□□JSZ	ERX□□S
ERX12S	±5 %	0.10 to 0.18
	±2 %	0.10 to 0.91
ERX1S	±5 %	0.10 to 0.18
ERX1F	±2 %	0.10 to 0.91
ERX2S	±5 %	0.10 to 0.20
ERX2F	±2 %	0.10 to 0.91
ERX3S	±5 %	0.10 to 0.20
ERX3F	±2 %	0.10 to 0.91
ERX5S	±5 %	—
ERX5F	±2 %	0.33 to 9.1
		1.0 to 9.1

The matrix of forming and packaging is as shown in the table below.

Code	Forming / Packaging	Forming & Taping matrix					1F	2F	3F	5F
		12S	1S	2S	3S	5S				
□··□	Straight lead wire type	○	○	○	○	○	○	○	○	○
□··P	Cut & Forming type	○	○	○	○	○	○	○	○	○
□··V	Axial taping type (Straight lead)	○	○	○	○	○	○	○	○	○
U··V	Axial taping type (Stand off)	○	○	○	○	○	○	○	○	○
□··E	Radial taping type (E type)	○	○	○	○	○	○	○	○	○
W··E	Radial taping type (WE type)	○	○	○	○	○	○	○	○	○
□··H	Cut & Forming type	○	○	○	○	○	○	○	○	○
S··E	Radial taping type (SE type)	○	○	○	○	○	○	○	○	○

The above example 1 shows a small metal film resistor, 2 W power rating, resistance value of 1.0 Ω, tolerance ±5 %, and package of radial taping.

Ex.2 : ERG type

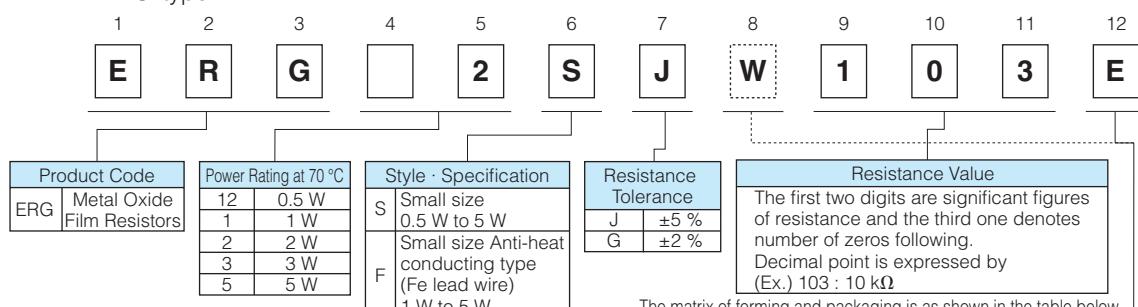

The matrix of forming and packaging is as shown in the table below.


Code	Forming / Packaging	Forming & Taping matrix					1F	2F	3F	5F
		12S	1S	2S	3S	5S				
□··□	Straight lead wire type	○	○	○	○	○	○	○	○	○
□··P	Cut & Forming type	○	○	○	○	○	○	○	○	○
□··V	Axial taping type (Straight lead)	○	○	○	○	○	○	○	○	○
U··V	Axial taping type (Stand off)	○	○	○	○	○	○	○	○	○
□··E	Radial taping type (E type)	○	○	○	○	○	○	○	○	○
W··E	Radial taping type (WE type)	○	○	○	○	○	○	○	○	○
□··H	Cut & Forming type	○	○	○	○	○	○	○	○	○
S··E	Radial taping type (SE type)	○	○	○	○	○	○	○	○	○

The above example 2 shows a small metal oxide film resistor, 2 W power rating, resistance value of 10 kΩ, tolerance ±5 %, and package of radial taping.


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

02 Sep. 2014

## Construction

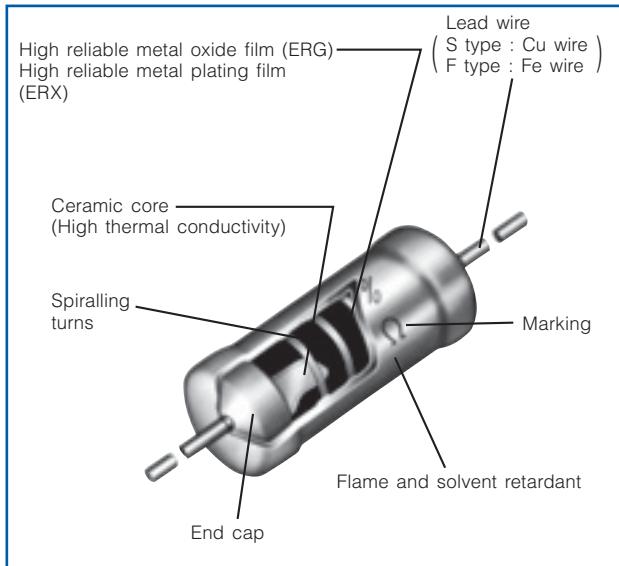

## Dimensions in mm (not to scale)



Part No.	Dimensions (mm)				Mass (Weight) [g/piece]
	L	phi D	l	phi d	
ERG(X)12S	6.35 <sup>+0.65</sup> <sub>-0.35</sub>	2.3 <sup>+0.5</sup> <sub>-0.3</sub>	30.0 <sup>+3.0</sup>	0.65 <sup>+0.05</sup>	0.26
ERG(X)1S	9.00 <sup>+1.50</sup> <sub>-1.00</sub>	2.8 <sup>+0.5</sup>	30.0 <sup>+3.0</sup>	0.65 <sup>+0.05</sup>	0.33
ERG(X)1F				0.80 <sup>+0.05</sup>	
ERG(X)2S	12.00 <sup>+1.50</sup> <sub>-1.00</sub>	4.0 <sup>+1.0</sup>	30.0 <sup>+3.0</sup>	0.80 <sup>+0.05</sup>	0.66
ERG(X)2F	15.00 <sup>+1.50</sup>	5.5 <sup>+1.0</sup>	38.0 <sup>+3.0</sup>	0.80 <sup>+0.05</sup>	1.47
ERG(X)3S				0.80 <sup>+0.05</sup>	
ERG(X)3F	24.00 <sup>+1.50</sup>	8.0 <sup>+1.0</sup>	38.0 <sup>+3.0</sup>	0.80 <sup>+0.05</sup>	3.54
ERG(X)5S				0.80 <sup>+0.05</sup>	
ERG(X)5F				0.80 <sup>+0.05</sup>	

## Ratings

Part No.	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Maximum Intermittent Overload Voltage <sup>(3)</sup> (V)	Dielectric Withstanding Voltage (VAC)	Res. Tol. (%) <sup>(4)</sup>	Resistance Range (Ω) <sup>(5)</sup>		T.C.R. (×10 <sup>-6</sup> /°C)	Standard Resistance Value
							min. <sup>(6)</sup>	max.		
ERG(X)12S	0.5	300	600	600	350	G (±2)	1	22 k	±350	E24
ERG(X)1S						J (±5)	0.2	47 k		
ERG(X)1F	1	350	600	600	350	G (±2)	1	68 k	±350	E24
ERG(X)2S						J (±5)	0.2	100 k		
ERG(X)2F	2	350	700	1000	600	G (±2)	1	100 k	±350	E24
ERG(X)3S						J (±5)	0.22	100 k		
ERG(X)3F	3	350	700	1000	1000	G (±2)	1	100 k	±300	E24
ERG(X)5S						J (±5)	0.22	100 k		
ERG(X)5F	5	500	1000	1500	1000	G (±2)	1	100 k	±200	E24
ERG(X)5F						J (±5)	0.33	100 k		

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Limiting Element Voltage listed above whichever less.

(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times \text{Power Rating}$  or max. Overload Voltage listed above whichever less.

(3) Intermittent Overload Test Voltage (IOTV) shall be determined from  $IOTV = 4.0 \times \text{Power Rating}$  or max. Intermittent Overload Voltage listed above whichever less.


(4) Resistance tolerance is of use besides range listed, please inquire.

(5) Resistance Range Type ERG :  $\geq 10 \Omega$   
Type ERX :  $\leq 9.1 \Omega$

(6) As for the low resistance value range, "Z" is given to the part number. (Refer to the explanation of part numbers.)


\* Z type is non standard resistance values.

Code	Part No.	Res. Tol.	Res. Value Range	Code	Part No.	Res. Tol.	Res. Value Range
Z	12S	±2 %	0.1 to 0.91 Ω	Z	2S	±2 %	0.1 to 0.91 Ω
		±5 %	0.1 to 0.18 Ω		2F	±5 %	0.1 to 0.2 Ω
	1S	±2 %	0.1 to 0.91 Ω		3S	±2 %	0.1 to 0.91 Ω
	1F	±5 %	0.1 to 0.18 Ω		3F	±5 %	0.1 to 0.2 Ω

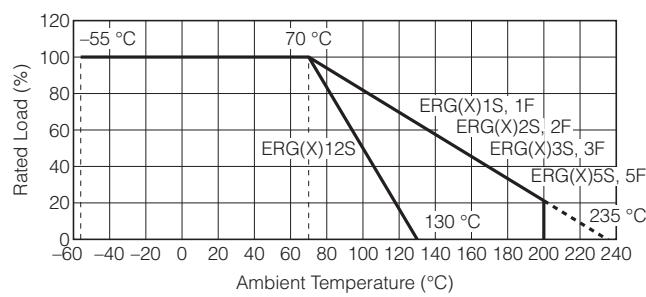


### Taped & Box

ERG(X)□□S□□□□V

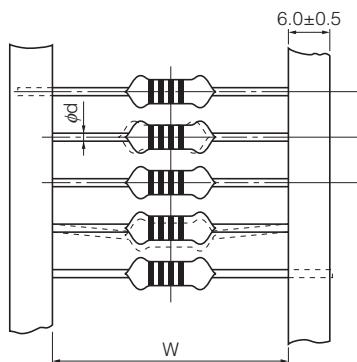


### Stand-off Taped & Box

ERG(X)□□S□U□□□V

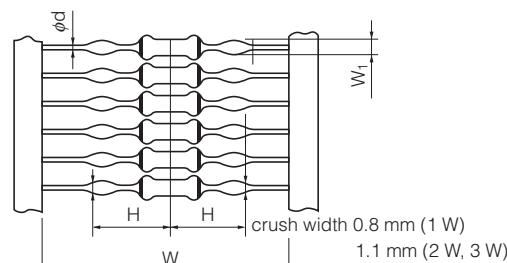


Part Number	Standard Quantity (pcs./box)	Taping (mm)					Box (mm)			
		P	50×P	W	H	W1	ϕd	a	b	c
ERG(X) 12S□□□□□V	2,000	5.0 <sup>±0.3</sup>	250 <sup>±2</sup>	52.0 <sup>±1.5</sup>	—	—	0.65 <sup>±0.05</sup>	85	80	255
ERG(X) 1S□□□□□V	2,000	5.0 <sup>±0.3</sup>	250 <sup>±2</sup>	52.0 <sup>±1.5</sup>	—	—	0.65 <sup>±0.05</sup>	85	80	255
ERG(X) 1S□U□□□V					12.0 <sub>0</sub> <sup>0</sup> 1.20 <sub>0</sub> <sup>0.15</sup>					
ERG(X) 2S□□□□□V	1,000	5.0 <sup>±0.3</sup>	250 <sup>±2</sup>	52.0 <sup>±1.5</sup>	—	—	0.80 <sup>±0.05</sup>	85	80	255
ERG(X) 2S□U□□□V					15.5 <sub>2.0</sub> <sup>0</sup> 1.40 <sub>0</sub> <sup>0.15</sup>					
ERG(X) 3S□□□□□V	1,000	10.0 <sup>±0.5</sup>	500 <sup>±2</sup>	74.0 <sup>±2.0</sup>	—	—	0.80 <sup>±0.05</sup>	105	100	325
ERG(X) 3S□U□□□V					23.0 <sub>2.0</sub> <sup>0</sup> 1.4 <sub>0</sub> <sup>0.15</sup>					




### Cut & Formed Type

ERG(X)□□S□□□□P

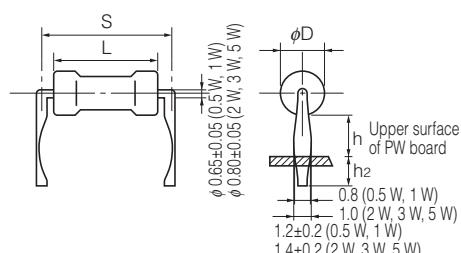

Part Number	Standard Quantity (pcs./box)	Dimensions (mm)				
		L	ϕD	S	h	h2
ERG(X)12S□□□□P	1,000	6.35 <sup>±0.65</sup> <sub>0.35</sub>	2.3 <sup>±0.5</sup> <sub>0.3</sub>	10.0 <sup>±1.5</sup>	4.0 <sup>±1.5</sup>	4.0 <sup>±1.5</sup>
ERG(X) 1S□□□□P	1,000	9.00 <sup>±1.50</sup> <sub>1.00</sub>	2.8 <sup>±0.5</sup>	12.5 <sup>±1.5</sup>	4.0 <sup>±1.5</sup>	4.0 <sup>±1.5</sup>
ERG(X) 2S□□□□P	1,000	12.00 <sup>±1.50</sup> <sub>1.00</sub>	4.0 <sup>±1.0</sup>	15.0 <sup>±1.5</sup>	6.0 <sup>±1.5</sup>	4.0 <sup>±1.5</sup>
ERG(X) 3S□□□□P	1,000	15.00 <sup>±1.50</sup>	5.5 <sup>±1.0</sup>	20.0 <sup>±2.0</sup>	6.5 <sup>±1.5</sup>	4.0 <sup>±1.5</sup>
ERG(X) 5S□□□□P	500	24.00 <sup>±1.50</sup>	8.0 <sup>±1.0</sup>	30.0 <sup>±2.0</sup>	7.5 <sup>±1.5</sup>	4.0 <sup>±1.5</sup>

ERG(X)□F□□□□H

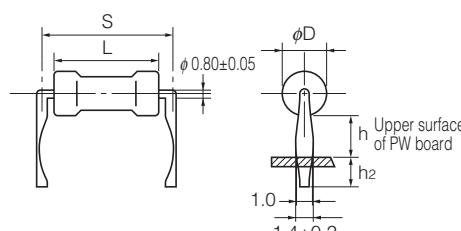


Part Number	Standard Quantity (pcs./box)	Dimensions (mm)				
		L	ϕD	S	h	h2
ERG(X)1F□□□□H	1,000	9.0 <sup>±1.5</sup> <sub>1.0</sub>	2.8 <sup>±0.5</sup>	12.5 <sup>±1.5</sup>	8 <sup>±2</sup>	4.0 <sup>±1.5</sup>
ERG(X)2F□□□□H	1,000	12.0 <sup>±1.5</sup> <sub>1.0</sub>	4.0 <sup>±1.0</sup>	15.0 <sup>±1.5</sup>	6 <sup>±2</sup>	5.0 <sup>±1.5</sup>
ERG(X)3F□□□□H	1,000	15.0 <sup>±1.5</sup>	5.5 <sup>±1.0</sup>	20.0 <sup>±2.0</sup>	10 <sup>±2</sup>	5.0 <sup>±1.5</sup>
ERG(X)5F□□□□H	500	24.0 <sup>±1.5</sup>	8.0 <sup>±1.0</sup>	30.0 <sup>±2.0</sup>	10 <sup>±2</sup>	5.0 <sup>±1.5</sup>

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

02 Sep. 2014


## For Panasert Automatic Insertion Machine Radial Taped & Box

ERG(X)□□S□□□□E (12S, 1S, 2S)

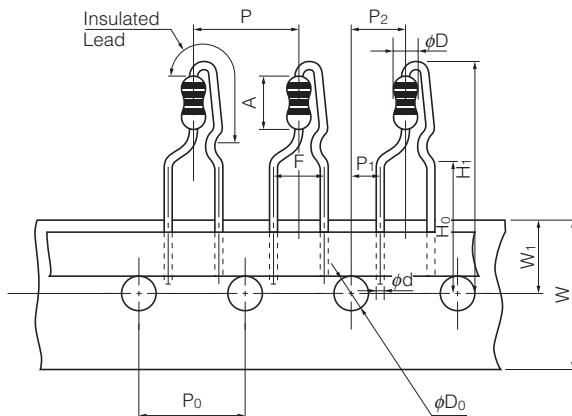

Dimensions (mm)		Dimensions (mm)		Dimensions (mm)		Dimensions (mm)		Dimensions (mm)	
P	12.7±1.0	W	18.0±0.5	H1	12S	32 max.	A	12S	6.35 <sup>+0.65</sup> <sub>-0.35</sub>
P0	12.7±0.3	W1	9.0±0.5		1S	32 max.		1S	9.0 <sup>+1.5</sup> <sub>-1.0</sub>
P1	3.85±0.70				2S	38 max.		2S	12.0 <sup>+1.5</sup> <sub>-1.0</sub>
P2	6.35±1.00			H0	16.0±0.5	phiD	0.65±0.05		
F	5.0±0.8			phiD0	4.0±0.2				


### ● Radial Tape Package Specifications



Part Number	Dimensions (mm)			Standard Quantity (pcs./box)
	a	b	c	
ERG(X) 12S□□□□E	46	130	335	2,000
ERG(X) 1S□□□□E	46	130	335	2,000
ERG(X) 2S□□□□E	49	100	335	1,000

## For Panasert Automatic Insertion Machine Radial Taped & Box

ERG(X)□□S□W□□□□E (12S, 1S, 2S, 3S)

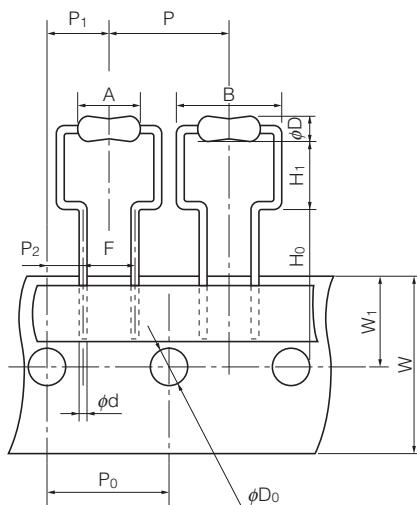


Dimensions (mm)		Dimensions (mm)		
P	12S	12.7±1.0	phiD0 12S, 1S, 2S, 3S 4.0±0.2	
	1S, 2S, 3S	30.0±1.0	A	12S 6.35 <sup>+0.65</sup> <sub>-0.35</sub>
P0	12S	12.7±0.3		1S 9.0 <sup>+1.5</sup> <sub>-1.0</sub>
	1S, 2S, 3S	15.0±0.3		2S 12.0 <sup>+1.5</sup> <sub>-1.0</sub>
P1	12S	6.35±1.00	B	3S 15.0±1.5
	1S, 2S, 3S	7.5±1.0		12S 11.2 max.
P2	12S	3.85±0.70		1S 14.0 max.
	1S, 2S, 3S	3.75±0.50	phiD	2S 17.0 max.
F	12S	5.0±0.5		3S 21.0 max.
	1S, 2S, 3S	7.5±0.8		12S 2.3 <sup>+0.5</sup> <sub>-0.3</sub>
W	12S, 1S, 2S, 3S	18.0±0.5	phiD	1S 2.8±0.5
W1	12S, 1S, 2S, 3S	9.0±0.5		2S 4.0±1.0
	12S	16.0±0.5		3S 5.5±1.0
H0	1S, 2S	18.0±1.0	phiD	12S phiD 0.65±0.05
	3S	19.0±1.0		1S, 2S, 3S phiD 0.80±0.05
	12S	6.5 <sup>+0.6</sup> <sub>-0.3</sub>		
H1	1S, 2S	6.5 <sup>+1.0</sup> <sub>-0.3</sub>		
	3S	8.0 <sup>+1.0</sup> <sub>-0.3</sub>		

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

02 Sep. 2014


## For Panasert Automatic Insertion Machine Radial Taped & Box

ERG(X)□F□S□□□E (1F, 2F, 3F)

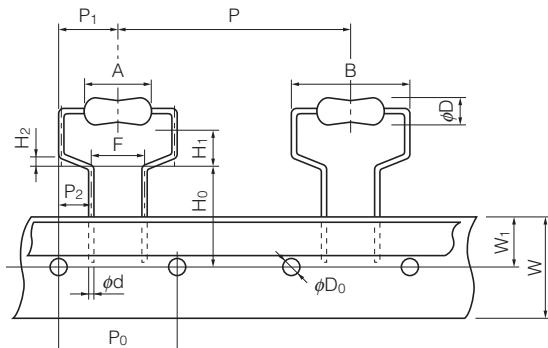

Dimensions (mm)		Dimensions (mm)	
P	$30.0 \pm 1.0$	H <sub>2</sub>	$1.0 \pm 0.3$
P <sub>0</sub>	$15.0 \pm 0.3$	$\phi D_0$	$4.0 \pm 0.2$
P <sub>1</sub>	$7.5 \pm 1.0$	A	$9.0^{+1.5}_{-1.0}$
P <sub>2</sub>	$3.75 \pm 0.50$	1F	$12.0^{+1.5}_{-1.0}$
F	$7.5 \pm 0.8$	2F	$15.0 \pm 1.5$
W	$18.0 \pm 0.5$	3F	$14$ max.
W <sub>1</sub>	$9.0 \pm 0.5$	B	$17$ max.
H <sub>0</sub>	$16.0^{+1.0}_0$	3F	$21$ max.
H <sub>1</sub>	$7.0^{+1.0}_0$	1F	$2.8 \pm 0.5$
	$8.0^{+1.0}_0$	2F	$4.0 \pm 1.0$
	$9.0^{+1.0}_0$	3F	$5.5 \pm 1.0$
		$\phi d$	$0.80 \pm 0.05$






### ● Radial Tape Package Specifications



Part No.	Dimensions (mm)			Standard Quantity (pcs./box)
	a	b	c	
ERG(X)12S□W□□□E	46	145	325	2,000
ERG(X) 1S□W□□□E	49	150	317	1,000
ERG(X) 1F□S□□□E				
ERG(X) 2S□W□□□E	49	150	317	500
ERG(X) 2F□S□□□E				
ERG(X) 3F□S□□□E	49	190	315	500

## Hot-spot Temperature (for Reference)

The temperature of the resistor body increases with the curve below. A touching vinyl wire may cause damages to resistor element. Do not place vinyl wires around resistors and be sure to consider where the resistors will be placed.

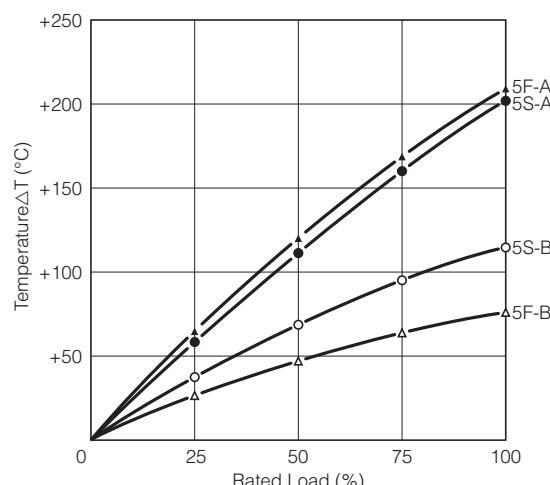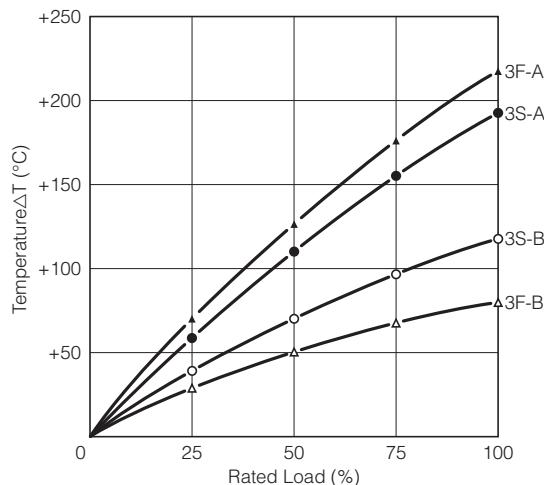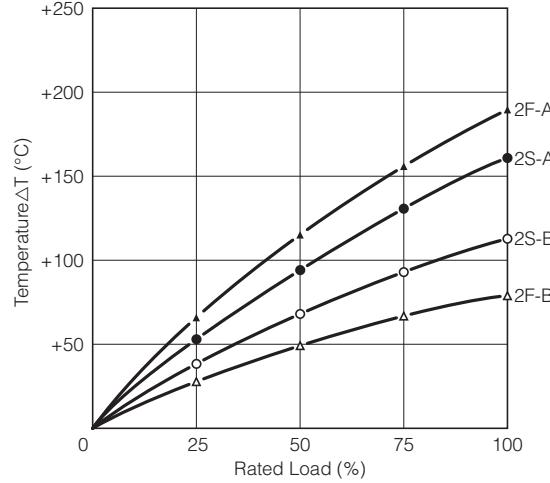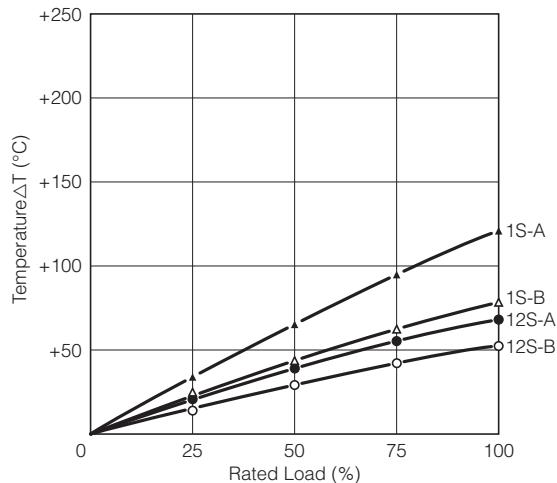

## ⚠ Safety Precautions

The following are precautions for individual products. Please also refer to the common precautions for Fixed Resistors in this catalog.


### 1. Transient voltage

If there is a possibility that the transient phenomenon (significantly high voltage applied in a short time) may occur or that a high voltage pulse may be applied, make sure to evaluate and check the characteristics of Metal(Oxide) Film Resistors (hereafter called the resistors) mounted on your product rather than only depending on the calculated power limit or steady-state conditions to complete the design or decide to use the resistors.

2. The resistors are covered with a special coating. Do not apply shock or vibration to them, or pinch them with long-nose pliers. Otherwise, the resistors may be damaged.
3. Do not apply excessive tension to the lead-connected sections. When bending the lead wire, do not apply excessive stress to the resistors and provide the wire with a natural curvature.
4. Do not brush the resistors during or after the cleaning process, which may be conducted after soldering. Otherwise, the coating film may be damaged.

(Data for Reference)

## Pulse Characteristics (Usual)

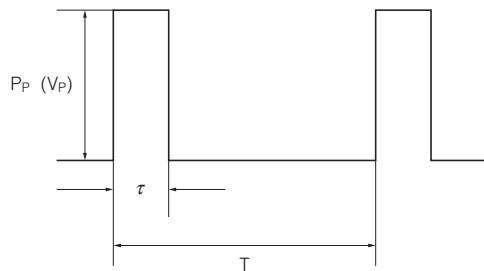

$P_p$	: Pulse limit power (W)
$V_p$	: Pulse limit voltage (V)
$\tau$	: Pulse continuous time (s)
$T$	: Period (s)
$V_r$	: Rated voltage (V)
$P$	: Rated power (W)
$R$	: Resistance value ( $\Omega$ )
$V_{p\ max.}$	: Max. pulse limit voltage (V)

Withstand pulse limit power is calculated by the next method.

$$P_p = K \cdot P \cdot T / \tau$$

$$V_p = \sqrt{K \cdot P \cdot R \cdot T / \tau}$$

Reference to the right about a fixed number of  $V_{p\ max.}$ .

- $T > 1(s) \rightarrow T = 1(s)$
- $T/\tau > 100 \rightarrow T/\tau = 100$
- $P_p < P \rightarrow P$  stands for  $P_p$  ( $V_p < V_r \rightarrow V_r$  stands for  $V_p$ )
- Added voltage  $\leq V_{p\ max.}$
- $P_p$  or  $V_p$  is referent value  
Conditions: Pulse added time = 1000 h  
Resistance change =  $\pm 5\%$   
Room temperature

Part No.	K	$V_{p\ max.}$ (V)
ERG(X) 12S	0.5	600
ERG(X) 1S	0.5	600
ERG(X) 2S	0.5	700
ERG(X) 3S	0.5	700
ERG(X) 5S	0.5	1000

### Anti-Pulse Power Resistors


Type: **ERGD**  
(0.5 W, 1 W, 2 W, 3 W)



#### Features


- Miniaturized
- Non-flammable
- Anti-Pulse Characteristic
- Automatic Insertion
- RoHS compliant

#### Explanation of Part Numbers

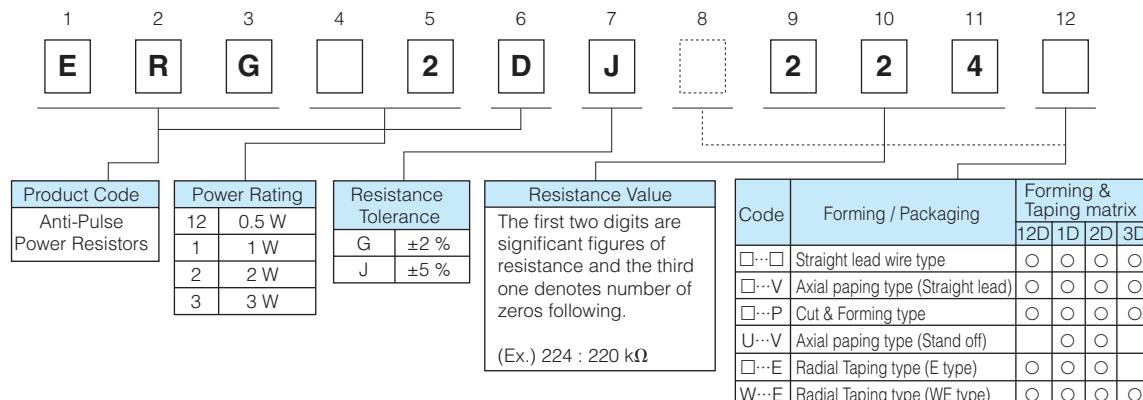


The above example shows an anti-pulse resistor, 2 W power rating, resistance value of 220 k ohms, tolerance  $\pm 5\%$ , and package of standard bulk packing.

#### Construction

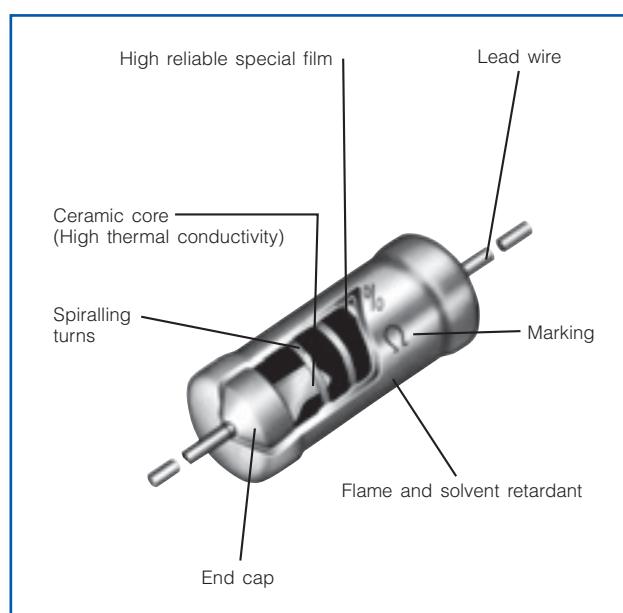

#### Dimensions in mm (not to scale)



Part No.	Dimensions (mm)				Mass (Weight) [g/p.c.]
	L	$\phi D$	$l$	$\phi d$	
ERG12D	$6.35^{+0.65}_{-0.35}$	$2.3^{+0.5}_{-0.3}$	$30.0^{+3.0}$	$0.65^{+0.05}$	0.26
ERG1D	$9.00^{+1.50}_{-1.00}$	$2.8^{+0.5}$	$30.0^{+3.0}$	$0.65^{+0.05}$	0.33
ERG2D	$12.00^{+1.50}_{-1.00}$	$4.0^{+1.0}$	$30.0^{+3.0}$	$0.80^{+0.05}$	0.66
ERG3D	$15.00^{+1.50}$	$5.5^{+1.0}$	$38.0^{+3.0}$	$0.80^{+0.05}$	1.47

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

02 Sep. 2014

Part No.	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Maximum Intermittent Overload Voltage <sup>(3)</sup> (V)	Dielectric Withstanding Voltage (VAC)	Res. Tol. (%)	Resistance Range (Ω) <sup>(4)</sup>		Standard Resistance Value
							min.	max.	
ERG12D	0.5	400	800	800	500	J (±5) G (±2)	51 k	240 k	E24
ERG1D	1	500	1000	1000	500	J (±5) G (±2)	110 k	330 k	E24
ERG2D	2	500	1000	1000	700	J (±5) G (±2)	110 k	510 k	E24
ERG3D	3	500	1000	1000	700	J (±5) G (±2)	110 k	750 k	E24

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Limiting Element Voltage listed above whichever less.


(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $SOTV = 2.5 \times \text{Power Rating}$  or max. Overload Voltage listed above whichever less.

(3) Intermittent Overload Test Voltage (IOTV) shall be determined from  $IOTV = 4.0 \times \text{Power Rating}$  or max. Intermittent Overload Voltage listed above whichever less.

(4) Resistance tolerance and resistance range is of use besides range listed, please inquire.

### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

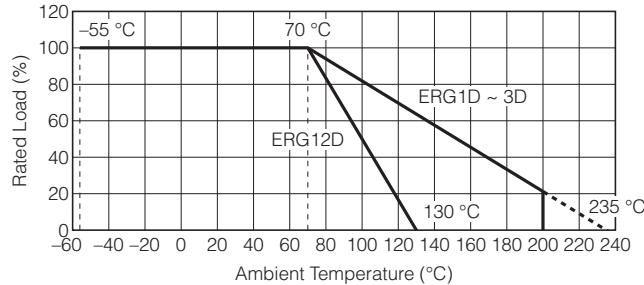

### ■ As for Packaging Methods and / or cut formed leads,

Please see Metal (Oxide) Film Resistors Packaging Methods

### ⚠ Safety Precautions

The following are precautions for individual products. Please also refer to the common precautions for Fixed Resistors in this catalog.

#### 1. Transient voltage

If there is a possibility that the transient phenomenon (significantly high voltage applied in a short time) may occur or that a high voltage pulse may be applied, make sure to evaluate and check the characteristics of Anti-Pulse Power Resistors (hereafter called the resistors) mounted on your product rather than only depending on the calculated power limit or steady-state conditions to complete the design or decide to use the resistors.

1. The resistors are covered with a special coating. Do not apply shock or vibration to them, or pinch them with long-nose pliers. Otherwise, the resistors may be damaged.
2. Do not apply excessive tension to the lead-connected sections. When bending the lead wire, do not apply excessive stress to the resistors and provide the wire with a natural curvature.
3. Do not brush the resistors during or after the cleaning process, which may be conducted after soldering. Otherwise, the coating film may be damaged.

## Metal Film Resistors

Type: **ERXL (Low Resistance Value)**  
(0.5 W, 1 W, 2 W)



### Features


- Miniaturized
- Non-flammable
- Automatic Insertion
- RoHS compliant

### Explanation of Part Numbers


1	2	3	4	5	6	7	8	9	10	11	12
E	R	X		2	L	J		4	7	M	
Product Code	Power Rating	Special Feature		Resistance Tolerance	Resistance Value	Code	Forming / Packaging	Forming & Taping matrix			
ERX	12 0.5 W			J $\pm 5\%$	The first two digits are significant figures of resistance and it shows by the unit of the "m $\Omega$ ". Decimal point is expressed by M as 47 m $\Omega$ = 47M.	12L	1L	2L			
Metal Film Resistors	1 1 W	L Small size Low resistance value				<input type="checkbox"/> □-□ Straight lead wire type	<input type="checkbox"/> O	<input type="checkbox"/> O	<input type="checkbox"/> O		
	2 2 W					<input type="checkbox"/> □-V Axial piping type (Straight lead)	<input type="checkbox"/> O	<input type="checkbox"/> O	<input type="checkbox"/> O		
						<input type="checkbox"/> □-P Cut & Forming type	<input type="checkbox"/> O	<input type="checkbox"/> O	<input type="checkbox"/> O		
						<input type="checkbox"/> □-E Radial Taping type (E type)	<input type="checkbox"/> O	<input type="checkbox"/> O	<input type="checkbox"/> O		
						<input type="checkbox"/> W-E Radial Taping type (WE type)	<input type="checkbox"/> O	<input type="checkbox"/> O	<input type="checkbox"/> O		

The above example shows a small size and low resistance value metal film resistor, 2 W power rating, resistance value of 47 m ohms, tolerance  $\pm 5\%$ , and package of standard bulk packing.

### Construction

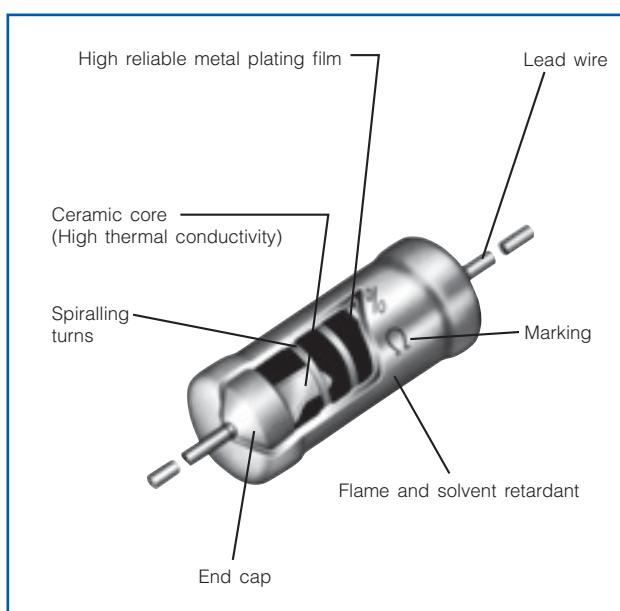

### Dimensions in mm (not to scale)



Part No.	Dimensions (mm)				Mass (Weight) [g/piece]
	L	phiD	l	phi d	
ERX12L	$6.35^{+0.65}_{-0.35}$	$2.3^{+0.5}_{-0.3}$	$30.0^{+3.0}$	$0.65^{+0.05}$	0.26
ERX1L	$9.00^{+1.50}_{-1.00}$	$2.8^{+0.5}$	$30.0^{+3.0}$	$0.65^{+0.05}$	0.33
ERX2L	$12.00^{+1.50}_{-1.00}$	$4.0^{+1.0}$	$30.0^{+3.0}$	$0.80^{+0.05}$	0.66

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

02 Sep. 2014

## Ratings


Part No.	Power Rating at 70 °C <sup>(1)</sup> (W)	Dielectric Withstanding Voltage (VAC)	Res. Tol. (%) <sup>(2)</sup>	Resistance Range (Ω) <sup>(2)</sup>		T.C.R. (×10 <sup>-6</sup> /°C)	Standard Resistance Value
				min.	max.		
ERX12L	0.5	350	J (±5)	22 m	82 m	22 to 39 mΩ=±1000 47 to 82 mΩ=± 500	E12
ERX1L	1	350	J (±5)	22 m	82 m		E12
ERX2L	2	600	J (±5)	22 m	82 m		E12

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Value}}$ .

(2) Resistance tolerance and resistance range is of use besides range listed, please inquire.

## Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

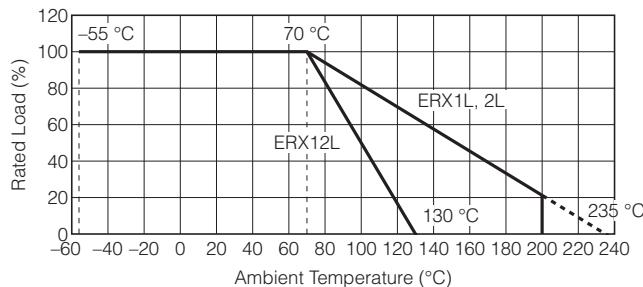

## ■ As for Packaging Methods and / or cut formed leads,

Please see Metal (Oxide) Film Resistors Packaging Methods

## △ Safety Precautions

The following are precautions for individual products. Please also refer to the common precautions for Fixed Resistors in this catalog.

### 1. Transient voltage

If there is a possibility that the transient phenomenon (significantly high voltage applied in a short time) may occur or that a high voltage pulse may be applied, make sure to evaluate and check the characteristics of Metal Film Resistors (hereafter called the resistors) mounted on your product rather than only depending on the calculated power limit or steady-state conditions to complete the design or decide to use the resistors.

2. The resistors are covered with a special coating. Do not apply shock or vibration to them, or pinch them with long-nose pliers. Otherwise, the resistors may be damaged.
3. Do not apply excessive tension to the lead-connected sections. When bending the lead wire, do not apply excessive stress to the resistors and provide the wire with a natural curvature.
4. Do not brush the resistors during or after the cleaning process, which may be conducted after soldering. Otherwise, the coating film may be damaged.

### Metal Film Fusing Resistors

Type: **ERQA**  
**ERQZ**

(0.25 W, 0.5 W, 1 W, 2 W coating type )



#### Features


- Accurate fusing
- Small size and lightweight
- Uniform quality, consistent performance and reliability
- Flame retardant, utilizing exclusive silicon insulation material
- Reference Standard  
EIAJ RC-2125
- RoHS compliant

#### Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	R	Q		2	A	B	J		1	0	
Product Code	Power Rating at 70 °C amb.	Special Feature		Resistance Tolerance				Resistance Value		Suffix for Packaging and/or Cut & Formed Leads	
Metal Film Fusing Resistors	14 0.25 W	A Standard		J ±5 %				The first two digits are significant figures of resistance and the third one denotes number of zeros following. Decimal point is expressed by R as 2.2=2R2.		Nil Std.bulk packing	
	12 0.5 W	Z Less than 2 Ω							P P type cut & formed		
	1 1 W	AB Standard							P-S P-S type cut & formed		
	2 2 W	Z Less than 2 Ω							E Radial Taped & Box		
									W-E Radial Taped & Box		

The above example shows a standard Metal Film Fusing Resistors, 2 W power rating, resistance value of 100 Ω, tolerance of ±5 %, and package of standard bulk packing.

#### Construction

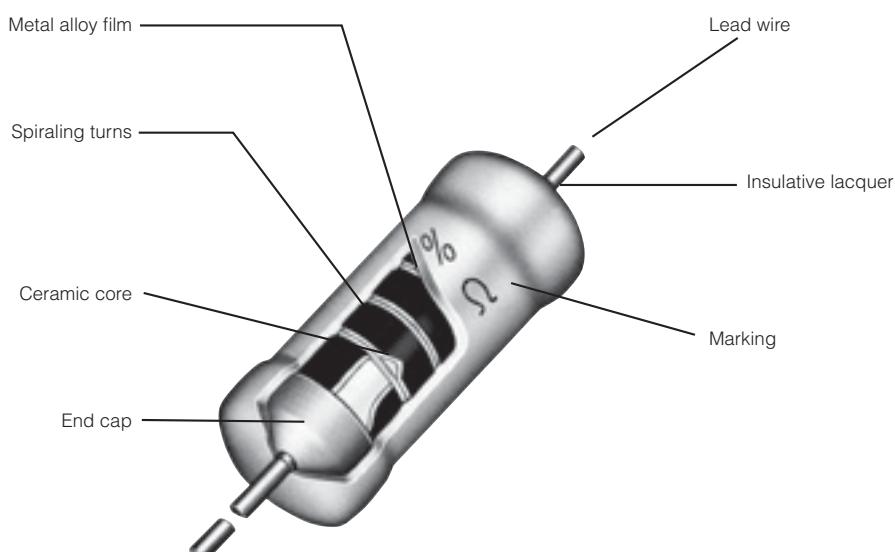


Ratings		Part No.	Power Rating at 70°C (W)	Maximum Open Circuit Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage	Dielectric Withstanding Voltage (V)	Resistance Tolerance (%)	Resistance Range (Ω)		T.C.R. (×10 <sup>-6</sup> /°C)	Standard Resistance Values	Marking Method on Body	Mass (Weight) [g/p.c.]
min.	max.							min.	max.				
ERQ14Z	0.25	200	3 times of rated voltage <sup>(2)</sup>	AC 350	J (± 5)	1.0	1.8	±350	E24	Color code	0.24		
ERQ14A	0.25					2.0	470						
ERQ12Z	0.5			AC 350	J (± 5)	1.0	1.8	±350	E24	Stamp	0.32		
ERQ12A	0.5					2.0	560						
ERQ1Z	1			AC 600	J (± 5)	1.0	1.8	±350	E24	Stamp	0.64		
ERQ1AB	1					2.0	560						
ERQ2Z	2			AC 1000	J (± 5)	1.0	1.8	±350	E24	Stamp	1.54		
ERQ2AB	2					2.0	560						

(1) Maximum Open Circuit Voltage: Referring to the maximum value of the voltage applied between terminals of the resistor when the resistor is opened in an electric circuit 1000 times power rating or voltage specified above whichever less is regarded as the maximum open circuit voltage.

(2) Rated Continuous Working Voltage (RCWV) shall be determined from  $RCWV = \sqrt{\text{Power Rating} \times \text{Resistance Value}}$

### Power Derating Curve


For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure on the right.

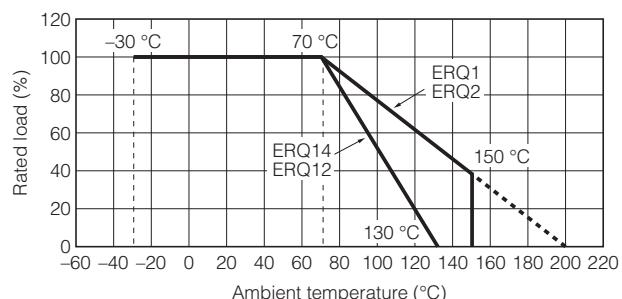

### Performance Specifications

Characteristics	Specifications			Test Methods
Fusing Characteristics	Rated Power	Res. Value (Ω)	Limit	<p>The test potential shall be preadjusted using a dummy resistor and then be subjected to the test specimens. The potential shall be readjusted within two seconds to reach the exact value of specified current. This test shall be made under the conditions at 20 °C and 65 % RH (or at a temperature of 5 °C to 35 °C and 45 to 85 % RH, only when any doubt may not be caused), and the use of stabilized power source is suggested. Fusing time shall be measured as the duration until the circuit current is decreased to a 1/50 the initial test current or less.</p>
	0.25 W 0.5 W	1 to 1.8	Open within 30 seconds at 30 times the rated power	
	1 W 2 W		Open within 30 seconds at 25 times the rated power	
	0.25 W 0.5 W 1 W 2 W	2 to 9.1	Open within 30 seconds at 16 times the rated power	
	0.25 W		10 to 470	
	0.5 W 1 W 2 W		10 to 560	


## Dimensions in mm (not to scale)




Part No.	Dimensions (mm)			
	L	$\phi D$	$l$	$\phi d$
ERQ14	$6.3^{+1.5}_{-1.0}$	$2.3^{\pm 0.5}$	$30.0^{\pm 3.0}$	$0.65^{\pm 0.05}$
ERQ12	$9.0^{+1.5}_{-1.0}$	$2.8^{\pm 0.5}$	$30.0^{\pm 3.0}$	$0.65^{\pm 0.05}$
ERQ1	$12.0^{+1.5}_{-1.0}$	$4.0^{\pm 1.0}$	$30.0^{\pm 3.0}$	$0.80^{\pm 0.05}$
ERQ2	$15.0^{\pm 1.5}$	$5.5^{\pm 1.0}$	$38.0^{\pm 3.0}$	$0.80^{\pm 0.05}$

## Explanation of Marking

Type ERQ14, ERQ12 (0.25 W, 0.5 W)

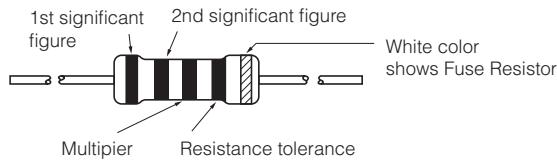


Type ERQ1, ERQ2 (1W, 2W)

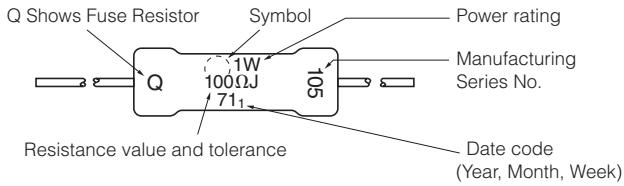


## Cut & Formed Type

ERQ□□AJ□□□P  
ERQ□□ZJ□□□P

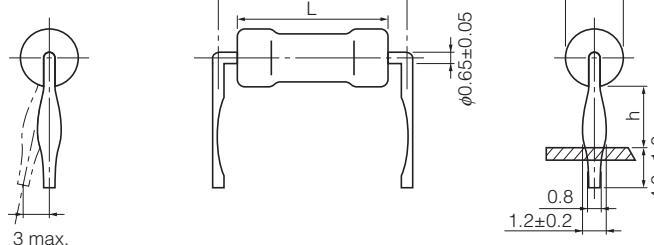

Part No.	Power Rating at 70 °C (W)	Standard Q'ty/Packing (pcs.)	Dimensions (mm)			
			L	$\phi D$	S	h
ERQ14□J□□□P	0.25	2,000	$6.3^{+1.5}_{-1.0}$	$2.3^{\pm 0.5}$	$10.0^{\pm 1.5}$	$4.0^{\pm 1.5}$
ERQ12□J□□□P	0.5	2,000	$9.0^{+1.5}_{-1.0}$	$2.8^{\pm 0.5}$	$12.5^{\pm 1.5}$	$4.0^{\pm 1.5}$

ERQ□ABJP□□□S  
ERQ□ZJP□□□S

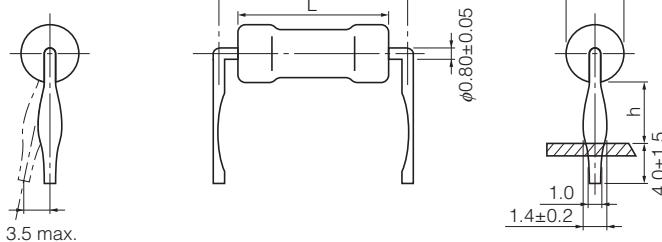


Part No.	Power Rating at 70 °C (W)	Standard Q'ty/Packing (pcs.)	Dimensions (mm)			
			L	$\phi D$	S	h
ERQ1□JP□□□S	1	1,000	$12.0^{+1.5}_{-1.0}$	$4.0^{\pm 1.0}$	$15.0^{\pm 1.5}$	$6.0^{\pm 1.5}$
ERQ2□JP□□□S	2	1,000	$15.0^{\pm 1.5}$	$5.5^{\pm 1.0}$	$20.0^{\pm 2.0}$	$6.5^{\pm 1.5}$

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

02 Sep. 2014


## For Panasert Automatic Insertion Machine Radial Taped & Box

ERQ□□AJ□□□E  
ERQ□□ZJ□□□E  
(14A/14Z, 12A/12Z, 1AB/1Z)

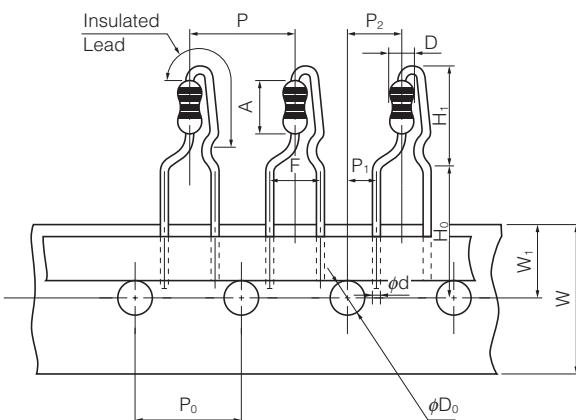

Dimensions (mm)		Dimensions (mm)		Dimensions (mm)			Dimensions (mm)			Dimensions (mm)		
P	12.7±1.0	W	18.0±0.5	H <sub>1</sub>	14A/14Z	12 max.	A	14A/14Z	6.35 <sup>+0.65</sup> <sub>-0.35</sub>	D	14A/14Z	2.3±0.5
P <sub>0</sub>	12.7±0.3	W <sub>1</sub>	9.0±0.5		12A/12Z	15.5 max.		12A/12Z	9.0 <sup>+1.5</sup> <sub>-1.0</sub>		12A/12Z	2.8±0.5
P <sub>1</sub>	3.85±0.70				1AB/1Z	19 max.		1AB/1Z	12.0 <sup>+1.5</sup> <sub>-1.0</sub>		1AB/1Z	4.0±1.0
P <sub>2</sub>	6.35±1.00			H <sub>0</sub>	16.0±0.5		ϕd	0.65±0.05				
F	5.0±0.8			ϕD <sub>0</sub>	4.0±0.2							


- Radial Tape Packaging Methods



Part Number	Dimensions (mm)			Standard Quantity (pcs./box)
	a	b	c	
ERQ14AJ□□□□E	46	130	335	2,000 pcs./box
ERQ14ZJ□□□□E				
ERQ12AJ□□□□E	46	130	335	2,000 pcs./box
ERQ12ZJ□□□□E				
ERQ1ABJ□□□□E	49	100	335	1,000 pcs./box
ERQ1ZJ□□□□E				

For Panasert Automatic Insertion Machine Radial Taped & Box

ERQ□□A/ZJW□□□E (14A/14Z, 12A/12Z, 1AB/1Z)




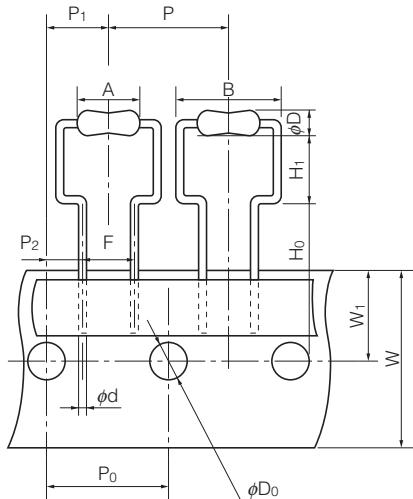


Dimensions (mm)			Dimensions (mm)		
P	14A/14Z	12.7±1.0	H <sub>1</sub>	14A/14Z	6.5 <sup>+0.6</sup> <sub>0</sub>
	12A/12Z, 1AB/1Z	30.0±1.0		12A/12Z	6.5 <sup>+1.0</sup> <sub>0</sub>
P <sub>0</sub>	14A/14Z	12.7±0.3	ϕD <sub>0</sub>	1AB/1Z	6.5 <sup>+1.0</sup> <sub>0</sub>
	12A/12Z, 1AB/1Z	15.0±0.3		4.0±0.2	
P <sub>1</sub>	14A/14Z	6.35±1.00	A	14A/14Z	6.35 <sup>+0.65</sup> <sub>0.35</sub>
	12A/12Z, 1AB/1Z	7.5±1.0		12A/12Z	9.0 <sup>+1.5</sup> <sub>1.0</sub>
P <sub>2</sub>	14A/14Z	3.85±0.70		1AB/1Z	12.0 <sup>+1.5</sup> <sub>1.0</sub>
	12A/12Z, 1AB/1Z	3.75±0.50		14A/14Z	11.2 max.
F	14A/14Z	5.0 <sup>+0.6</sup> <sub>-0.2</sub>	B	12A/12Z	14 max.
	12A/12Z, 1AB/1Z	7.5 <sup>+0.6</sup> <sub>-0.2</sub>		1AB/1Z	17 max.
W	18.0±0.5		ϕD	14A/14Z	2.3 <sup>+0.5</sup> <sub>0.3</sub>
W <sub>1</sub>	9.0±0.5			12A/12Z	2.8±0.5
H <sub>0</sub>	14A/14Z	16.0±0.5	ϕd	1AB/1Z	4.0±1.0
	12A/12Z	18.0±1.0		14A/14Z	0.65±0.05
	1AB/1Z	18.0±1.0		12A/12Z, 1AB/1Z	0.80±0.05



Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

### Fusing Characteristics (Constant Voltage Circuit)

This data is for reference only, specifications should be verified in written form with the engineering division.

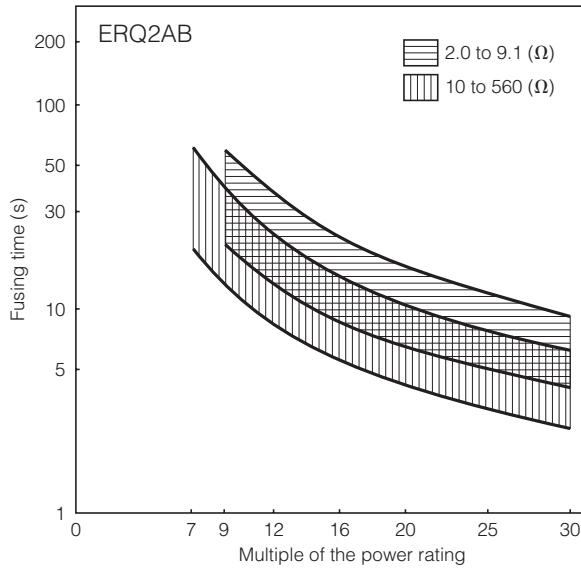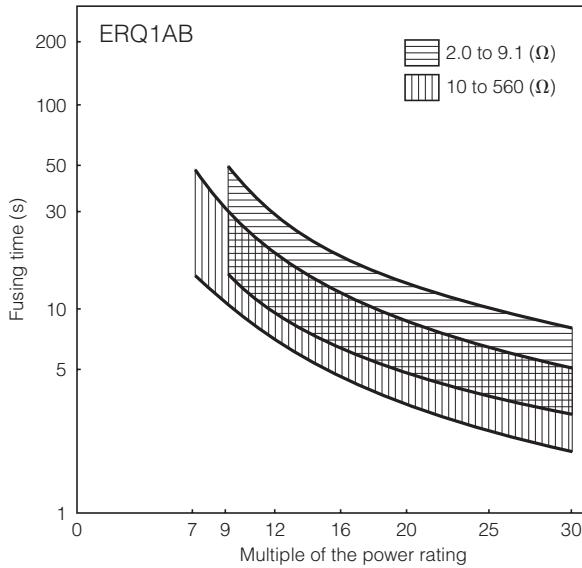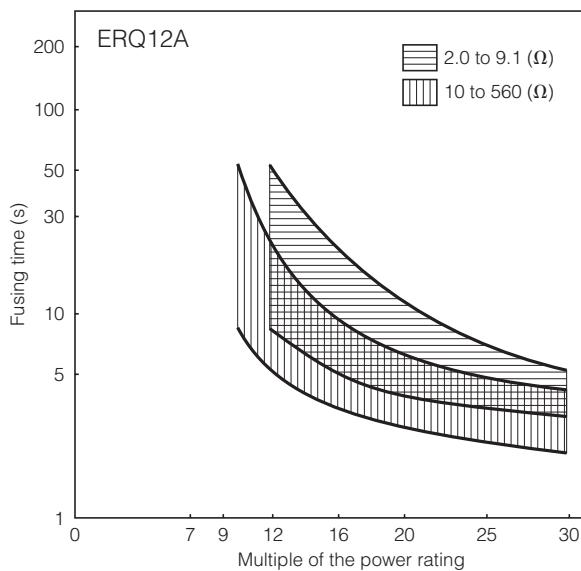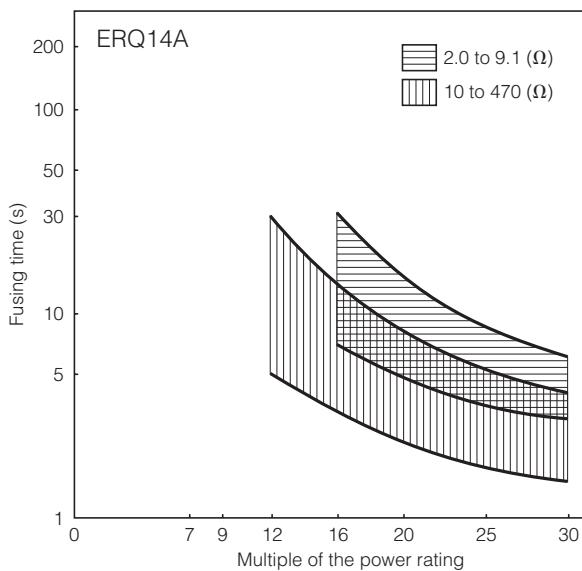

### Hot Spot Temperature (for reference)

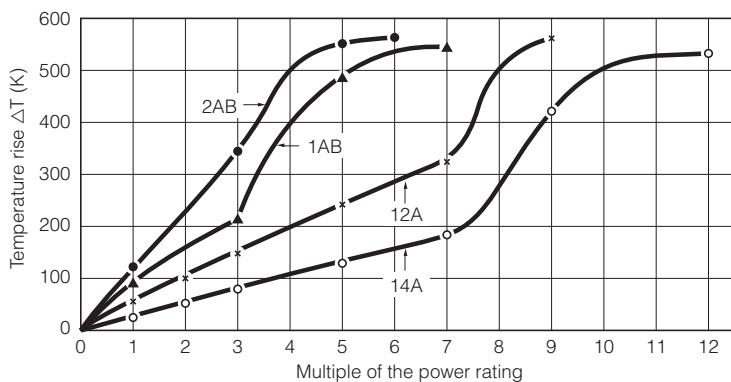

### ⚠ Safety Precautions

The following are precautions for individual products. Please also refer to the common precautions for Fixed Resistors in this catalog.

#### 1. Checking the fusing conditions

- 1) Fusing characteristics differ depending on the type, shape, and resistance. Check the fusing conditions before selecting the type of Metal Film Fusing Resistors (hereafter called the fusing resistor) to be used.
- 2) Use the fusing resistors under the maximum open circuit voltage. Otherwise, arcing may occur when a voltage much higher than the rated one is applied in the event of an abnormality in the circuit, or when a high voltage is applied after fusing.
- 3) Under abnormal conditions of a constant voltage circuit, a current of about 2 or 3 times the initial abnormal current passes through, accelerating the speed at which the fusing resistors blows. When using a constant current circuit, carefully check the conditions because the fusing resistors may not blow in a constant current circuit.

#### 2. Checking for pulse voltage, impact voltage, and transient voltage

Make sure to evaluate and check the fusing resistors mounted on your product if they are to be mounted on a circuit that generates an impact voltage, or if there is a possibility that the transient phenomenon (significantly high voltage applied in a short time) may occur or that a pulse voltage with a high peak voltage may be applied. Make sure to consult our sales staff before using the fusing resistors under special conditions.


#### 3. Conditions of use in a steady state

Make sure that the load conditions have a sufficient allowance for the power derating curve. The characteristics of the fusing resistors are set by using a constant voltage circuit.

#### 4. The solvent resistance of the fusing resistors is not assured. If you use a solvent for cleaning after soldering or other processes, make sure to consult our sales staff before use and perform a prior test and evaluation to ensure that the solvent will not affect the reliability of the fusing resistors.

### (Data for Reference)

#### Pulse Characteristics (Usual)

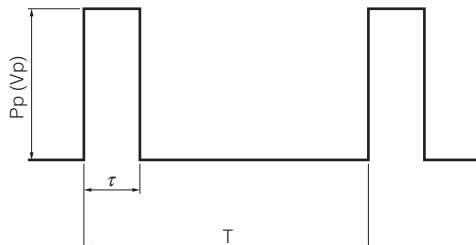

$P_p$	: Pulse limit power (W)
$V_p$	: Pulse limit voltage (V)
$\tau$	: Pulse continuous time (s)
$T$	: Period (s)
$V_R$	: Rated voltage (V)
$P$	: Rated power (W)
$R$	: Resistance value ( $\Omega$ )
$V_{p\max.}$	: Max. pulse limit voltage (V)

Withstand pulse limit power is calculated by the next method.

$$P_p = K \cdot P \cdot T/\tau$$

$$V_p = \sqrt{K \cdot P \cdot R \cdot T/\tau}$$

Reference to the right about a fixed number of  $V_{p\max.}$

Part No.	K	$V_{p\max.}$ (V)
ERQ14A	0.6	200
ERQ12A	0.6	250
ERQ1AB	0.6	250
ERQ2AB	0.4	250

- $T > 1(s) \rightarrow T = 1(s)$
- $T/\tau > 100 \rightarrow T/\tau = 100$
- $P_p < P \rightarrow P$  stands for  $P_p$   
( $V_p < V_R \rightarrow V_R$  stands for  $V_p$ )
- Added voltage  $\leq V_{p\max.}$
- $P_p$  or  $V_p$  is reference value

Conditions : Pulse added time = 1000 h, Resistance change =  $\pm 5\%$   
Room temperature

### Standard for Resistance Value, Resistance Tolerance and Color Code

#### Basis Standard

IEC Publication 60062 : Marking codes for resistors and capacitors.  
 IEC Publication 60063 : Preferred number series for resistors and capacitors.  
 JIS C 5062 : Marking codes for resistors and capacitors.  
 JIS C 5063 : Preferred number series for resistors and capacitors.

#### Resistance Values

The resistance values are notched by "Ratio" below in each series.

Series	Resistance Tolerance (Standard)	Ratio	Remarks
E6	$\pm 20\%$	$\sqrt[6]{10} \approx 1.46$	Please refer to standard resistance values shown on this catalog.
E12	$\pm 10\%$	$\sqrt[12]{10} \approx 1.21$	
E24	$\pm 5\%$	$\sqrt[24]{10} \approx 1.10$	
E48	$\pm 2\%$	$\sqrt[48]{10} \approx 1.05$	
E96	$\pm 1\%$	$\sqrt[96]{10} \approx 1.02$	

#### How to express the resistance value with a Panasonic part number

The resistance value expressed in ohms is identified by a three digit number or a four digit number.

The last digit specifies the number of zeroes to follow.

The letter "R" shall be used as the decimal point for less than 10  $\Omega$ .

The examples of a three digit number

Resistance Code	Value in ohms
R56	0.56
5R6	5.6
100	10
271	270
102	1 k
273	27 k
104	100 k
275	2.7 M
106	10 M
107	100 M

The examples of a four digit number

Resistance Code	Value in ohms
R562	0.562
5R62	5.62
56R2	56.2
1000	100
2711	2.71 k
1002	10 k
2713	271 k
1004	1 M
2715	27.1 M
1006	100 M

### How to express the resistance tolerance with a Panasonic part number

The resistance tolerance is identified by a single letter in accordance with the following table and the code is placed just before the resistance code in the following examples.


Tolerance Code	Tolerance (%)	Examples
W	$\pm 0.05$	W1001 : 1000 $\Omega \pm 0.05\%$
B	$\pm 0.1$	B1001 : 1000 $\Omega \pm 0.1\%$
C	$\pm 0.25$	C1001 : 1000 $\Omega \pm 0.25\%$
D	$\pm 0.5$	D1001 : 1000 $\Omega \pm 0.5\%$
F	$\pm 1$	F1001 : 1000 $\Omega \pm 1\%$
G	$\pm 2$	G1001 : 1000 $\Omega \pm 2\%$
J	$\pm 5$	J101 : 100 $\Omega \pm 5\%$
K	$\pm 10$	K101 : 100 $\Omega \pm 10\%$
M	$\pm 20$	M101 : 100 $\Omega \pm 20\%$

### Color code indication for the resistance value and the tolerance

Fixed resistors whose resistance value and tolerance are indicated by color code follow the standard below.

#### Color code

Color	First digit	Second digit	Third digit	Multiplier	Resistance tolerance	
					%	Code
Black	0	0	0	1		
Brown	1	1	1	10	$\pm 1$	F
Red	2	2	2	$10^2$	$\pm 2$	G
Orange	3	3	3	$10^3$	$\pm 0.05$	W
Yellow	4	4	4	$10^4$		
Green	5	5	5	$10^5$	$\pm 0.5$	D
Blue	6	6	6	$10^6$	$\pm 0.25$	C
Violet	7	7	7	$10^7$	$\pm 0.1$	B
Gray	8	8	8			
White	9	9	9			
Gold				$10^{-1}$	$\pm 5$	J
Silver				$10^{-2}$	$\pm 10$	K
None					$\pm 20$	M



#### Indication example

##### Color code of 5 color bands

When the standard resistance value follows E48 series or 96 series, color code of the resistors are indicated by five color bands. Example below is 154 k $\Omega$ .

##### Example 1

1st Color	2nd Color	3rd Color	4th Color	5th Color
Brown (1)	Green (5)	Yellow (4)	Orange (1000)	Brown ( $\pm 1\%$ )

##### Color code of 4 color bands

When the standard resistance value follows E6 series, 12 series or 24 series, color code of the resistors are indicated by four color bands. Example below is 15 k $\Omega$ .

##### Example 2

1st Color	2nd Color	3rd Color	4th Color
Brown (1)	Green (5)	Orange (1000)	Gold ( $\pm 5\%$ )

### Standard Resistance Values

E6					E6					E6				
E6	E12	E24	E48	E96	E6	E12	E24	E48	E96	E6	E12	E24	E48	E96
10	10	10	100	100	22	22	22	215	215	47	47	47	464	464
			102					221					475	
			105	105				226	226				487	487
			107					232					499	
			110	110	24	24	24	237	237				511	511
			113					243					523	
			115	115				249	249				536	536
			118					255					549	
			121	121				261	261	56	56	56	562	562
12	12	12	124					267					576	
			127	127	27	27	27	274	274				590	590
			130					280					604	
			133	133				287	287				619	619
			137					294					634	
	13	13	140	140	30	30	30	301	301	62	62	62	649	649
			143					309					665	
			147	147				316	316				681	681
			150					324					698	
			154	154	33	33	33	332	332	75	75	75	715	715
15	15	15	158					340					732	
			162	162				348	348				750	750
			165					357					768	
			169	169	36	36	36	365	365				787	787
			174					374					806	
	16	16	178	178		39	39	383	383	82	82	82	825	825
			182					392					845	
			187	187				402	402				866	866
			191					412					887	
			196	196	43	43	43	422	422	91	91	91	909	909
18	18	18	200					432					931	
			205	205				442	442				953	953
			210					453					976	

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

02 Sep. 2014

## **CAUTION AND WARNING**

1. The electronic components contained in this catalog are designed and produced for use in home electric appliances, office equipment, information equipment, communications equipment, and other general purpose electronic devices.  
Before use of any of these components for equipment that requires a high degree of safety, such as medical instruments, aerospace equipment, disaster-prevention equipment, security equipment, vehicles (automobile, train, vessel), please be sure to contact our sales representative.
2. When applying one of these components for equipment requiring a high degree of safety, no matter what sort of application it might be, be sure to install a protective circuit or redundancy arrangement to enhance the safety of your equipment. In addition, please carry out the safety test on your own responsibility.
3. When using our products, no matter what sort of equipment they might be used for, be sure to make a written agreement on the specifications with us in advance.
4. Technical information contained in this catalog is intended to convey examples of typical performances and/or applications and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of our company or any third parties nor grant any license under such rights.
5. In order to export products in this catalog, the exporter may be subject to the export license requirement under the Foreign Exchange and Foreign Trade Law of Japan.
6. No ozone-depleting substances (ODSs) under the Montreal Protocol are used in the manufacturing processes of Automotive & Industrial Systems Company, Panasonic Corporation.

● Please contact

● Factory

**Circuit Components Business Division  
Automotive & Industrial Systems Company  
Panasonic Corporation**  
401 Sadamasa-cho, Fukui-shi,  
Fukui 910-8502, JAPAN

The information in this catalog is valid as of January 2015.